Verti-Line

16LM 1170 R.P.M.

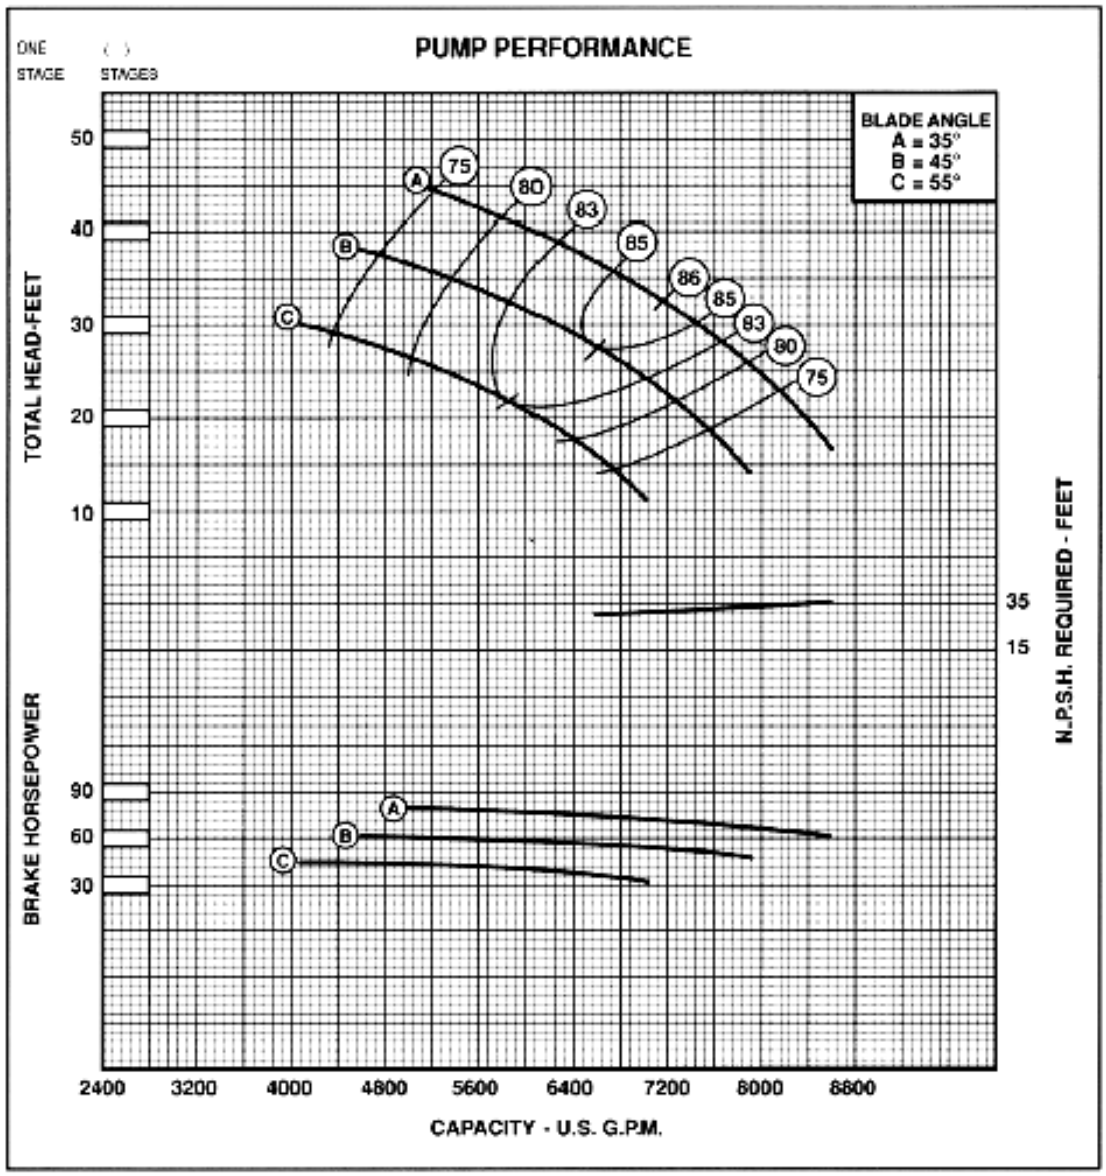

IMPELLER DIAMETER	SHUT-OFF HEAD ft.	SHUT OFF HORSEPOWER	"K" FACTOR lbs. / ft.	MAX. SPHERES	1.3 in.
				IMP. PATT. NO.	16LM4A
A	87.5	126.9	58.5	CASE PATT. NO.	–
B	76.5	90.3	58.5	DISCHARGE BOWL	16LM2
C	60.8	67.9	58.5	INTER. BOWL	16LM4

Curves reflect typical performance, refer to factory for certification.

MIXED FLOW

16LM

IMP. DIA.	SHUT-OFF HEAD	SHUT-OFF HP	"K" FACTOR
A	87.5	126.9	58.5
B	76.5	90.3	58.5
C	60.8	67.9	58.5

MAX. SPHERES - 1.3
IMP. PATT. NO. - 16LM4A
CASE PATT. NO. -
DISCH. BOWL - 16LM2
INTER. BOWL - 16LM4

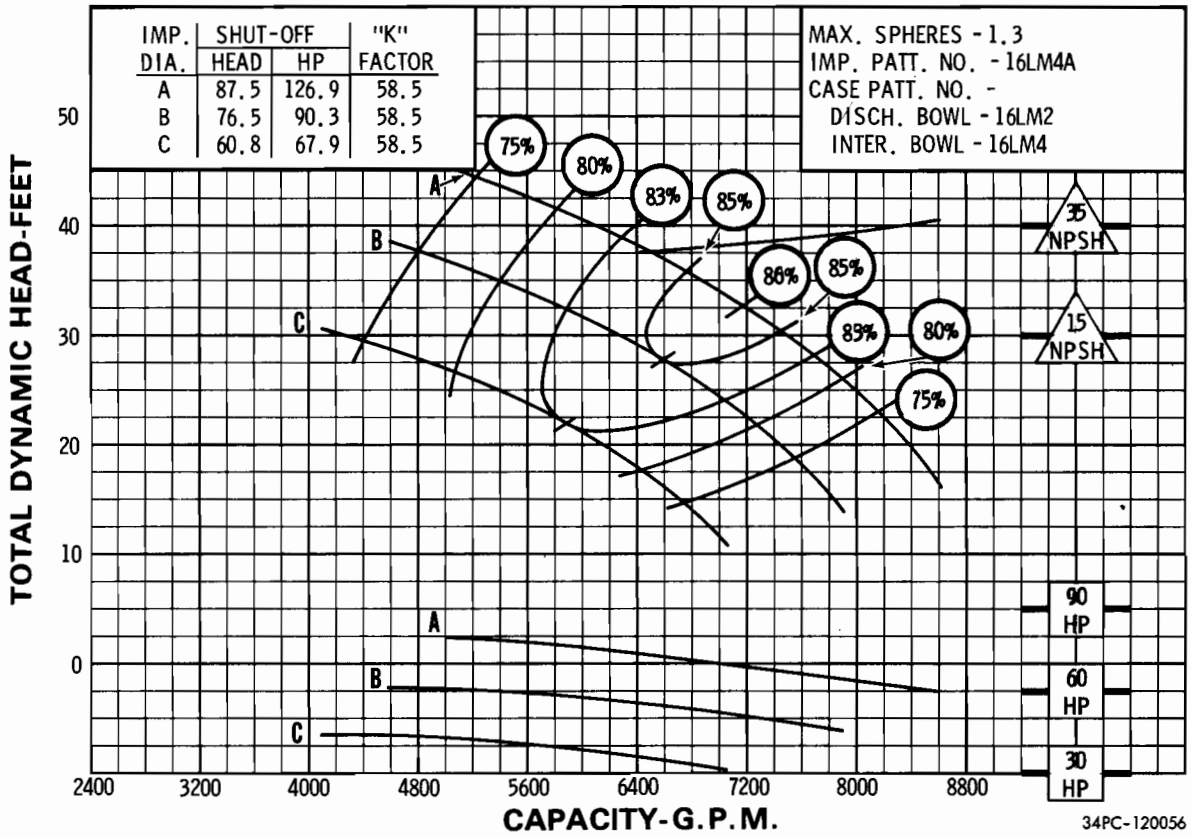

1170 R.P.M.

16 x 13 x 16B SERIES 1160

MIXED FLOW

16 LM

1170 R.P.M.

IMP. DIA.	SHUT-OFF HEAD	SHUT-OFF HP	"K" FACTOR
A	95.0	158.7	58.5
B	66.2	99.0	58.5

MAX. SPHERES - 1.3
IMP. PATT. NO. - 16LM7B
CASE PATT. NO. -
DISCH. BOWL - 16LM2
INTER. BOWL - 16LM4

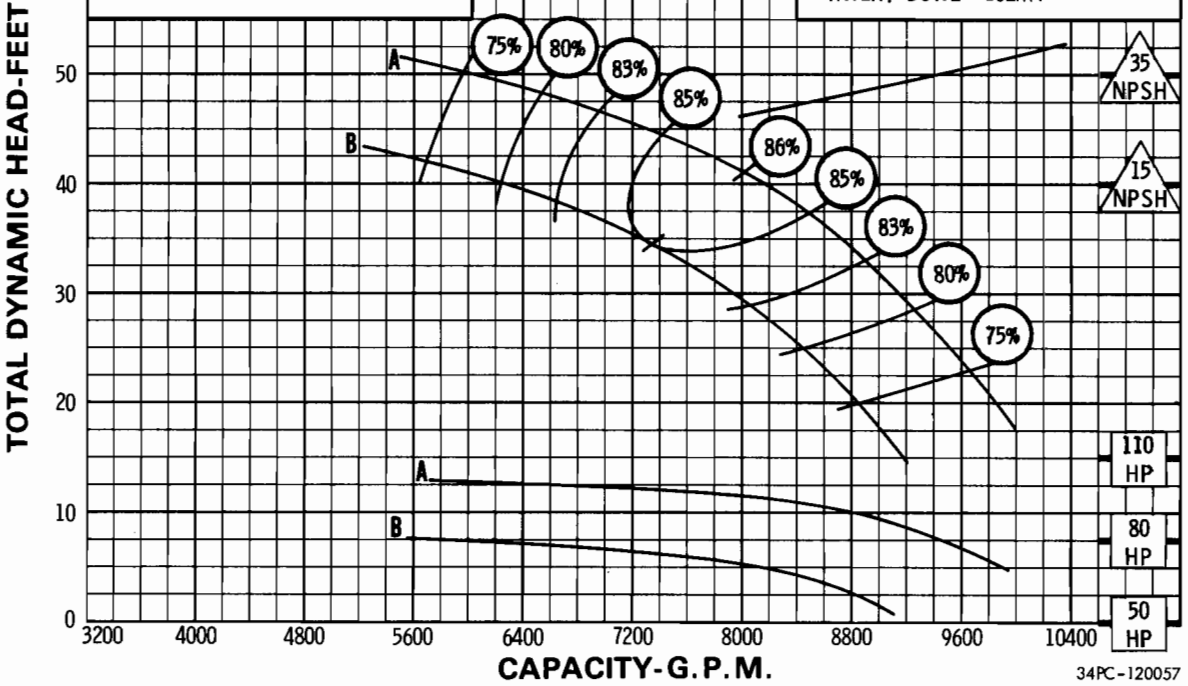

34PC-120057

880 R.P.M.

IMP. DIA.	SHUT-OFF HEAD	SHUT-OFF HP	"K" FACTOR
A	52.8	66.9	58.5
B	37.1	42.2	58.5

MAX. SPHERES - 1.3
IMP. PATT. NO. - 16LM7B
CASE PATT. NO. -
DISCH. BOWL - 16LM2
INTER. BOWL - 16LM4

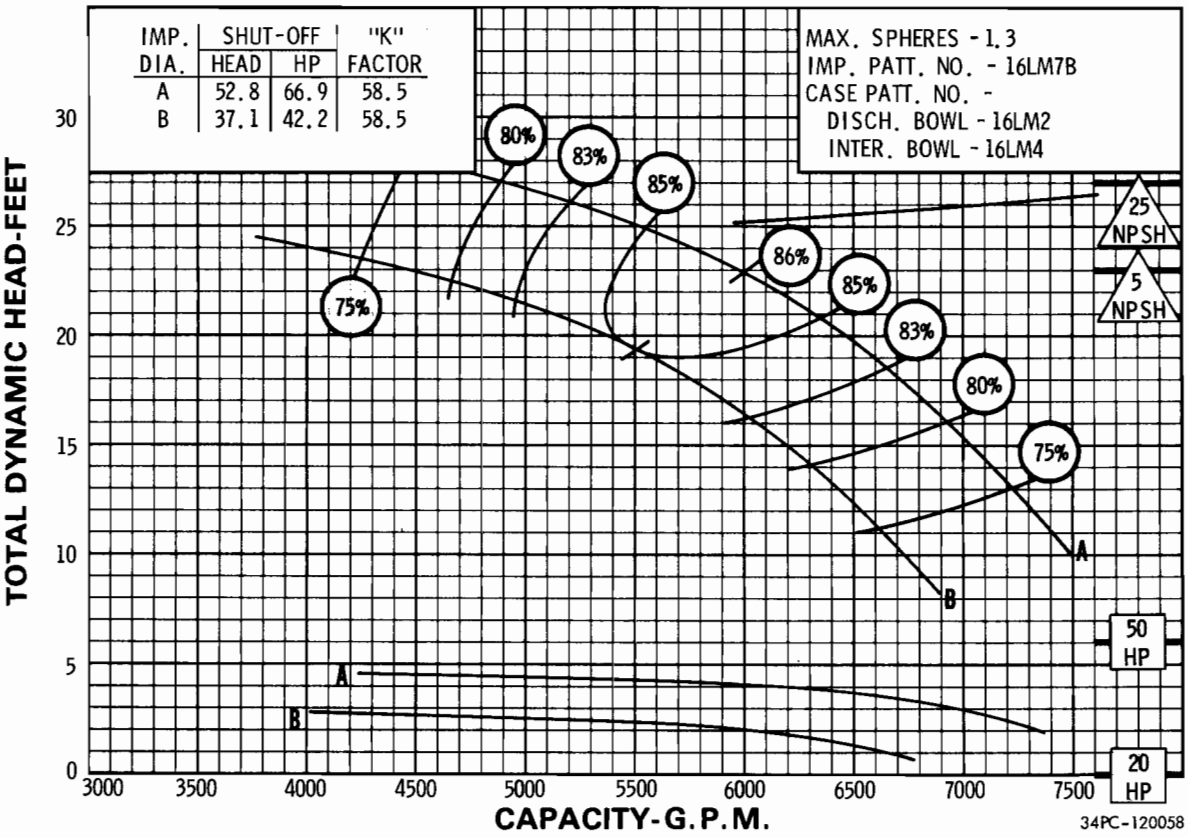

34PC-120058