134-77

SUPERSEDES 134-69,69C
JUN. 82

APRIL 1985

MODEL 10YB PUMP

SPEED - 1200 RPM

CLOSED IMPELLER

60 HERTZ

IMP. DIA.: VARIOUS	N_S = 4800	MAX. DIA. SOLIDS: 1.38"	SPEED: 1175 RPM	MODEL: 10YB

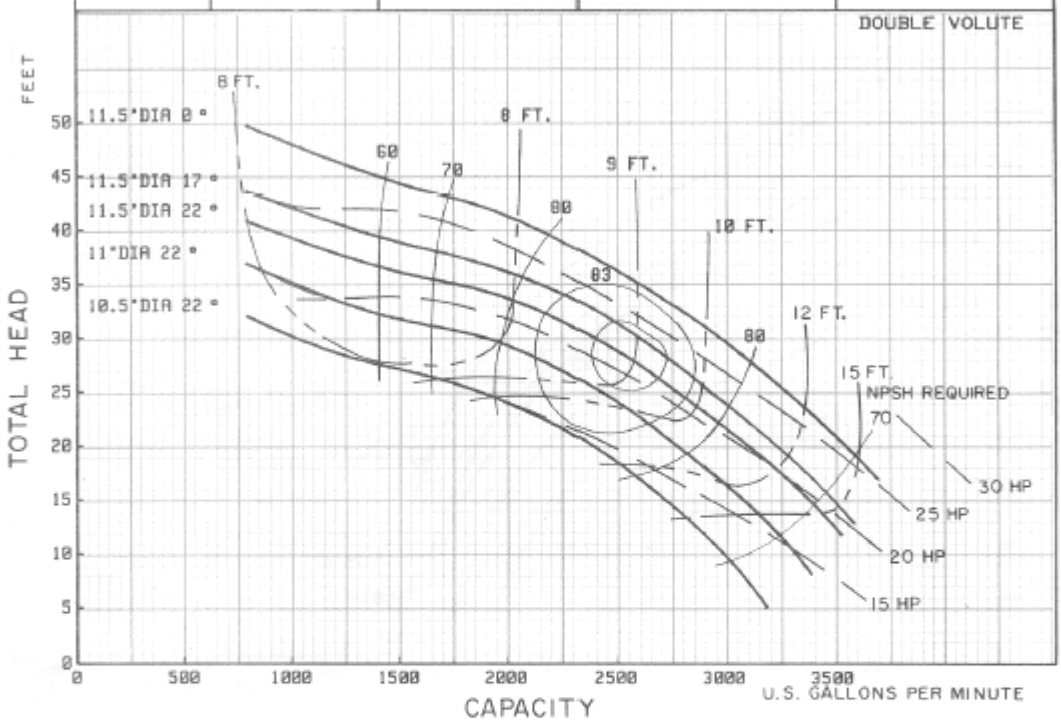

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

HP	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD + 15% S.F.
30	A (11.5" 0°)	
25	B (11.5" 17°)	B+(11.5"@0°)
20	C (11.38" 22°)	C+(11.75"@22°)
15	D (10.38" 22°)	D+(11.38"@22°)

Performances shown are for close-coupled electric configuration with packing. Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON