JULY 1984

SUPERSEDES
138-17 JULY 1983

MODEL 4HS PUMP

SPEED - 1200 RPM
CLOSED IMPELLER
60 HERTZ

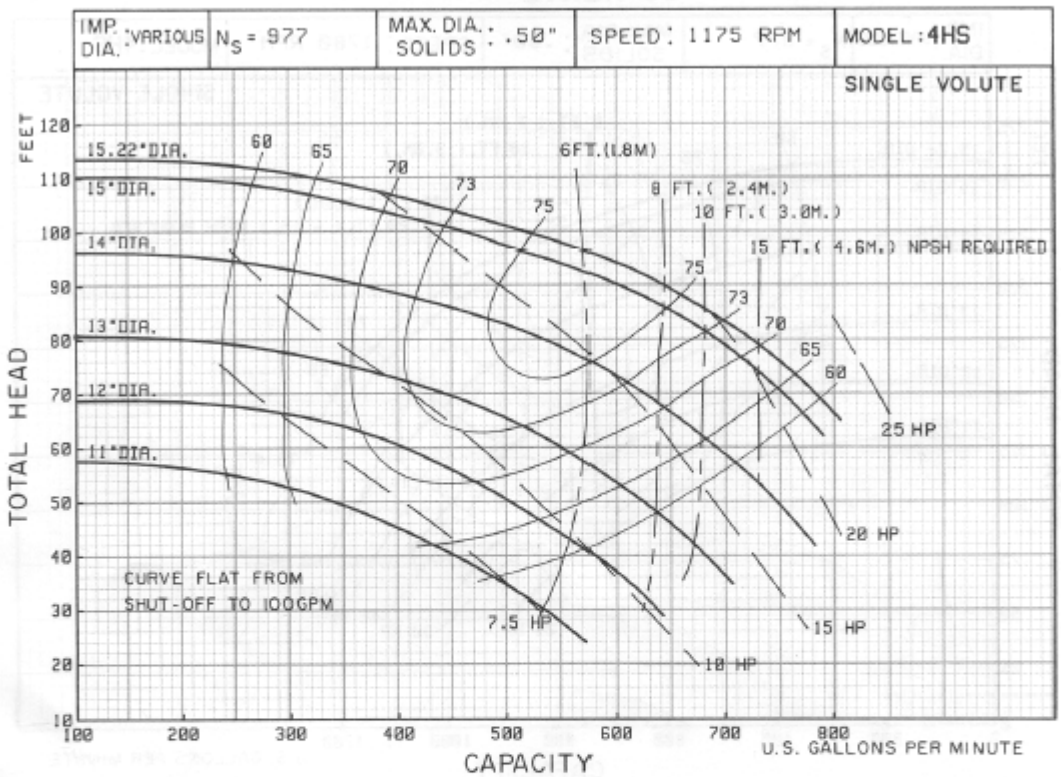

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

HP	MAXIMUM IMPELLER DIAMETER	
	FOR FULL MOTOR LOAD	FOR FULL MOTOR LOAD + 15% S.F.
25	A(15.22")	
20	B(14.38")	B+(15.22")
15	C(13.31")	C+(13.81")
10	D(11.88")	D+(12.38")
7.5	E(10.88")	E+(11.38")

Performances shown are for close-coupled electric configuration with packing. Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON