JULY 1984

SUPERSEDES
138-37 JULY 1983

MODEL 6H PUMP

SPEED - 1200 RPM
CLOSED IMPELLER
60 HERTZ

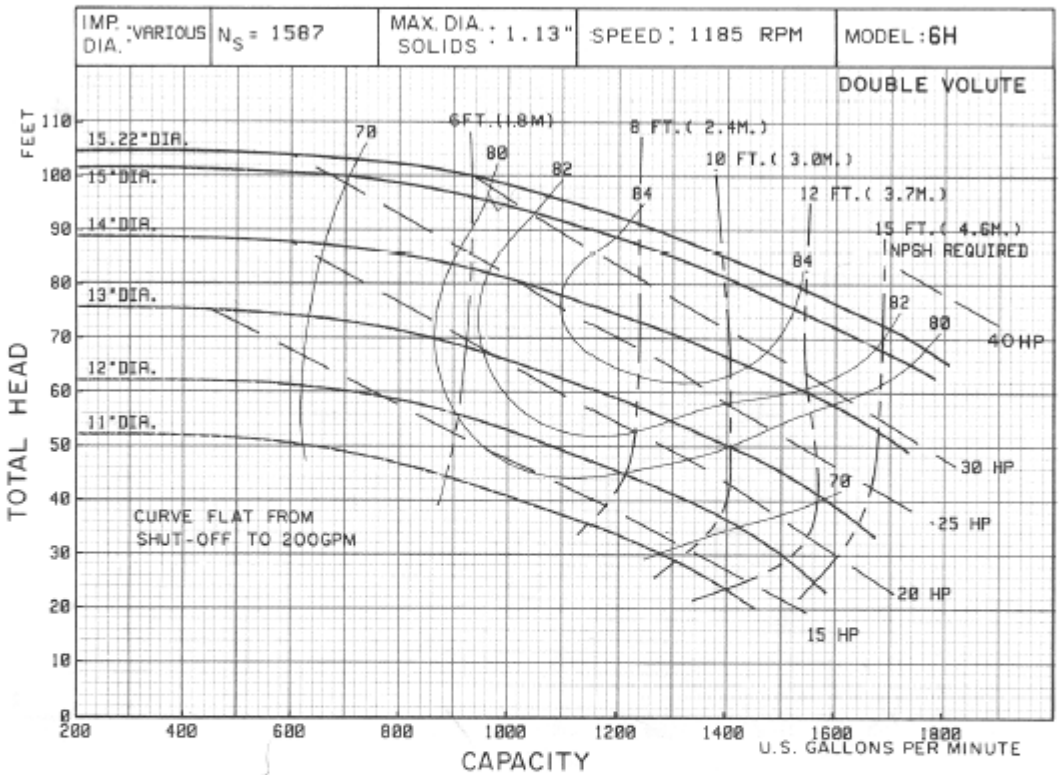

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

	MAXIMUM IMPELLER DIAMETER	
HP	FOR FULL MOTOR LOAD	FOR FULL MOTOR LOAD + 15% S.F.
40	A(15.22")	
30	B(14.12")	B+(15.06")
25	C(13.38")	C+(13.88")
20	D(12.38")	D+(13.12")
15	E(11.25")	E+(11.88")

Performances shown are for close-coupled electric configuration with packing. Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON