MODEL 4HS PUMP

SPEED - 1800 RPM
CLOSED IMPELLER
60 HERTZ

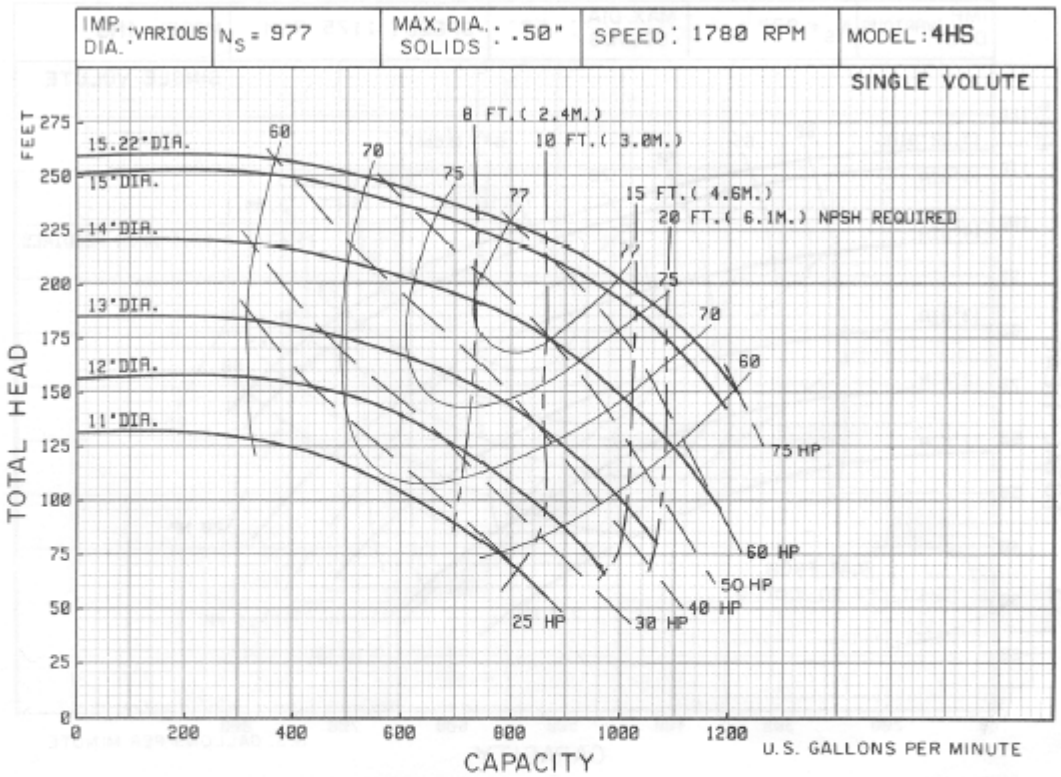

HP	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD + 15% S.F.
75	A(15.22")	
60	B(14.00")	B+(14.75")
50	C(13.38")	C+(13.81")
40	D(12.81")	D+(13.12")
30	E(11.75")	E+(12.06")
25	F(11.00")	F+(11.44")

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

Performances shown are for close-coupled electric configuration with packing. Other mounting styles may require horsepower and/or performance adjustments.