SUPERSEDES
138-34 JULY 1983

JULY 1984

138-34

MODEL 5HH PUMP

SPEED - 1800 RPM
CLOSED IMPELLER
60 HERTZ

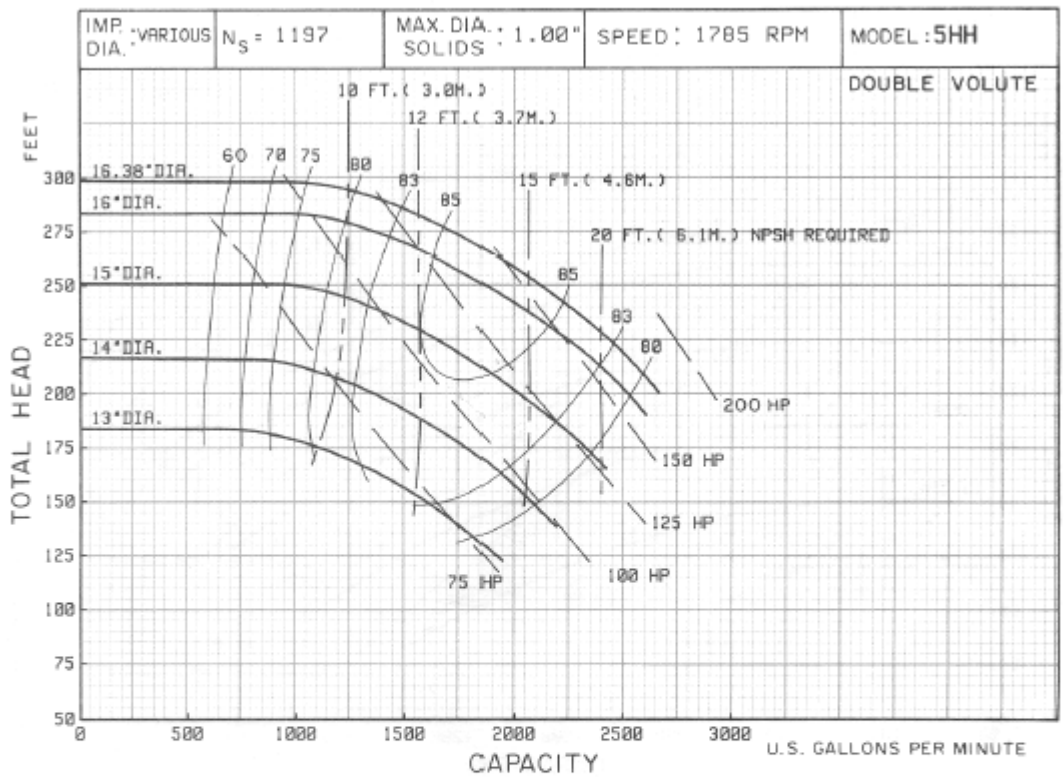

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

HP	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD + 15% S.F.
200	A(16.38")	
150	B(15.81")	B+(16.25")
125	C(14.88")	C+(15.44")
100	D(14.00")	D+(14.75")
75	E(12.88")	E+(13.50")

Performances shown are for close-coupled electric configuration with packing. Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON