MODEL 6H PUMP

SPEED - 1800 RPM
CLOSED IMPELLER
60 HERTZ

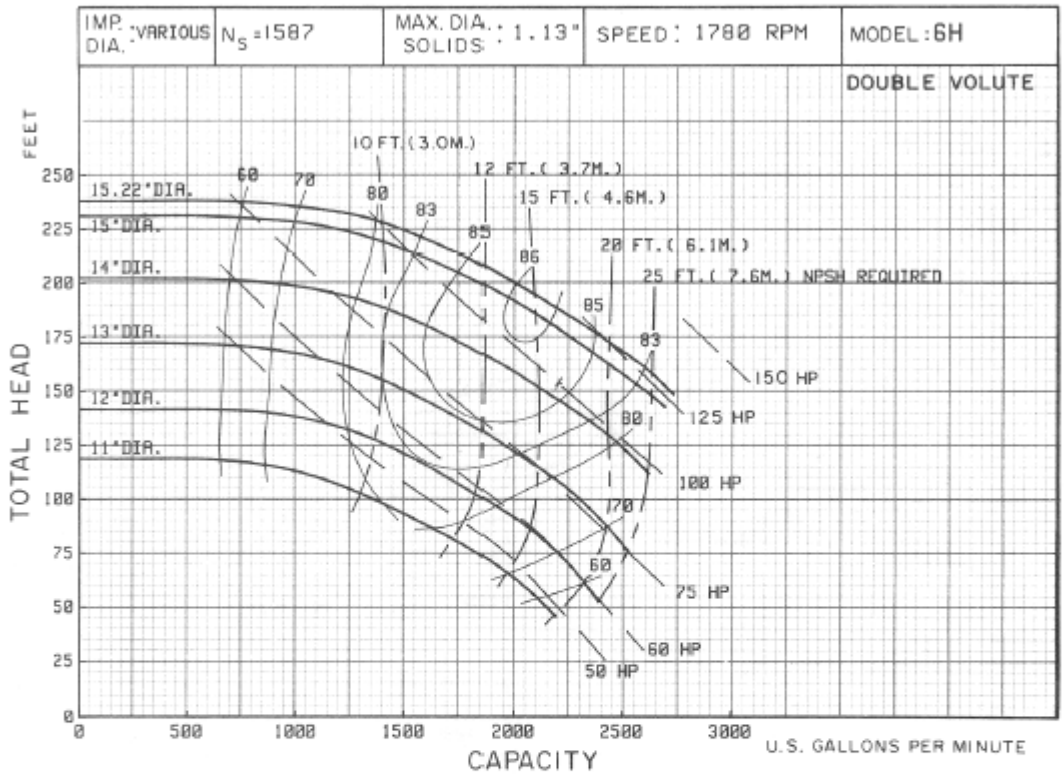

HP	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD	MAXIMUM IMPELLER DIAMETER: FOR FULL MOTOR LOAD + 15% S.F.
150	A(15.22")	
125	B(15.06")	B+(15.22")
100	C(14.12")	C+(14.62")
75	D(12.75")	D+(13.50")
60	E(12.00")	E+(12.50")
50	F(11.06")	F+(11.75")

FT. x (.305) = METERS

GPM x (.227) = CUBIC METERS PER HOUR

Performances shown are for close-coupled electric configuration with packing.
Other mounting styles may require horsepower and/or performance adjustments.

CORNELL PUMP CO. — PORTLAND, OREGON