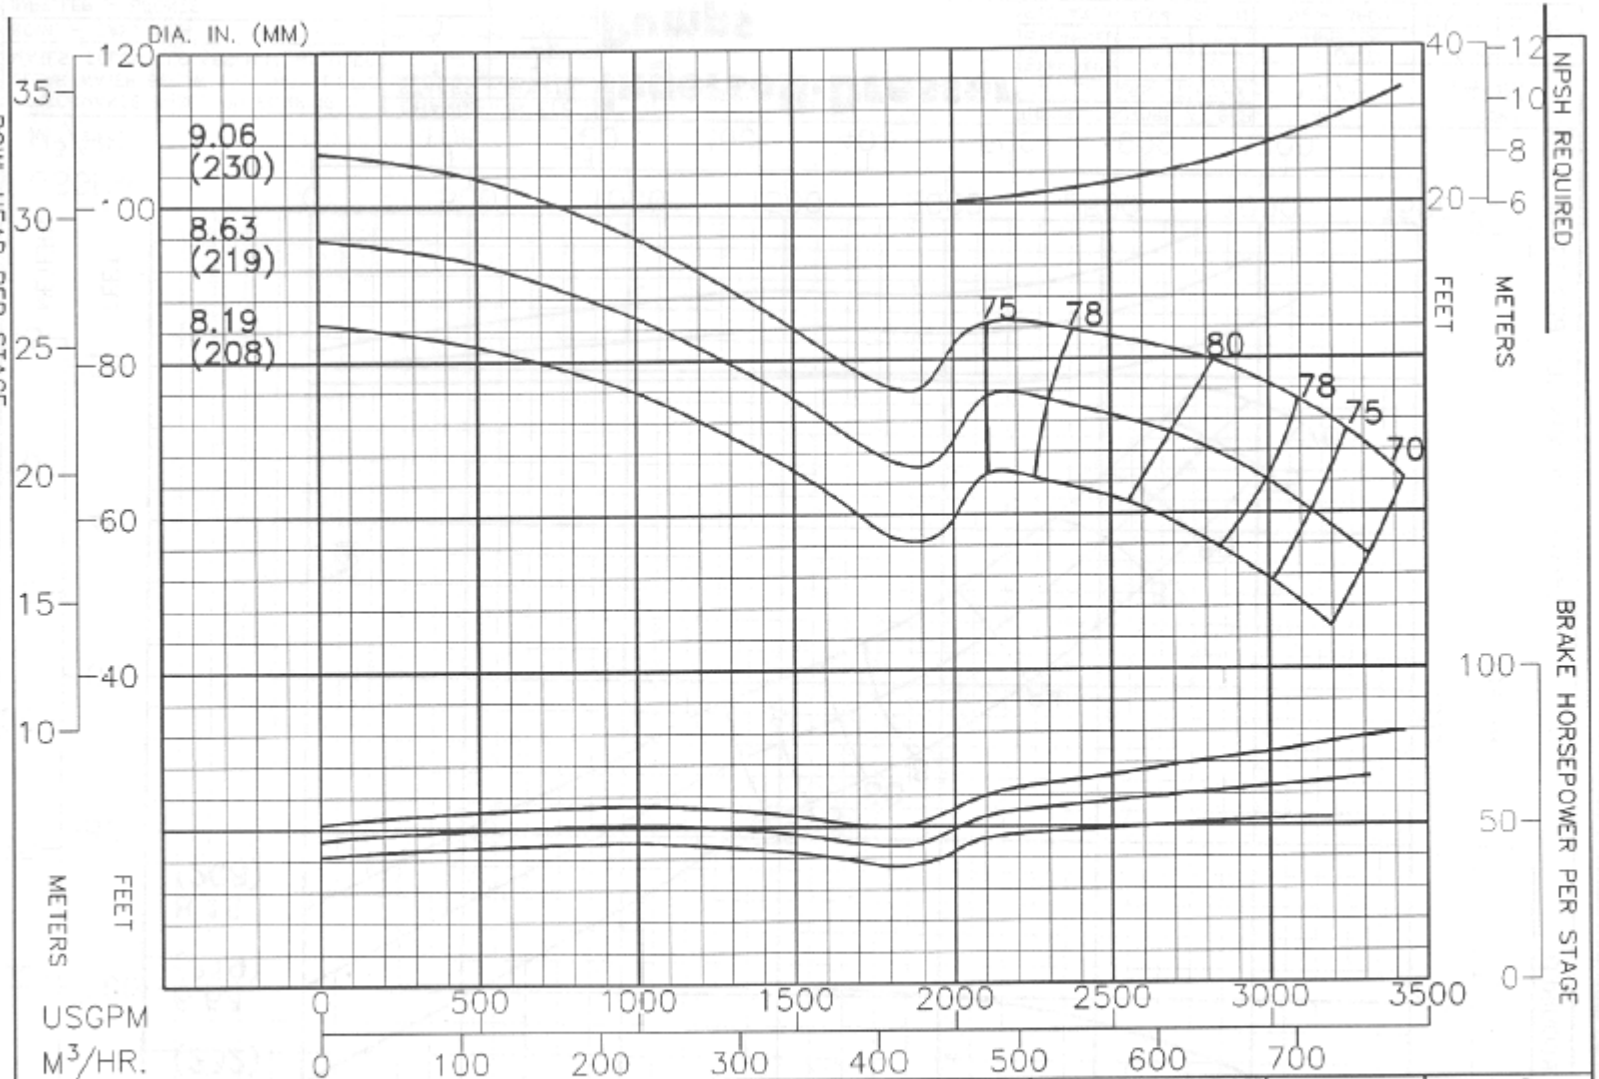

PERFORMANCE BASED ON PUMPING CLEAR WATER BELOW 85°F. WITH LISTED MATLS. COLUMN LOSSES NOT INCLUDED.	CHANGE STAGES	IN EFF. POINTS
	1	−2
	2	−1
BOWL – CAST IRON	3	0
IMPELLER – BRONZE		

Ingersoll-Dresser Pumps

THRUST FACTORS AT BEP		
IMPELLER	LBS/FT	KG/M
STANDARD	30.2	45.0
BALANCED	---	---
EYE AREA – 43.4 SQ. IN.		

RPM	PUMP
1775	14DH
SEMIOPEN IMPELLER	CURVE NO.
N_s = 3540	EC–1899

© 1993 Ingersoll–Dresser Pump Company
Printed in U.S.A.

Ingersoll-Dresser Pumps