6JOLL

SEMI-OPEN TYPE IMPELLER

3500 RPM

NO. OF STAGES	EFF. CHANGE (NO. OF POINTS)
1	−3
2	−2
3	−½

HORSEPOWER WILL BE EFFECTED BY CHANGE IN EFFICIENCY

PERFORMANCE FOR:
Bowl Pattern No.: 620011-B-R4
Imp. Pattern No.: 620232-A-R0

PUMP DATA

Shaft Dia. (IN.)	1.0
Maximum Sphere (IN.)	¼
Maximum Head (FT.)*	1130
Min. Submergence (IN.)**	11
Impeller Wt. (LBS.)	1.9
Thrust Constant (K)	3.6
Bowl O.D. (IN.)	5⅞

NOTES

Performance indicated based on cold water with a specific gravity of 1.0.

* Standard construction.

** Minimum submergence over lip of bell to prevent vortexing.
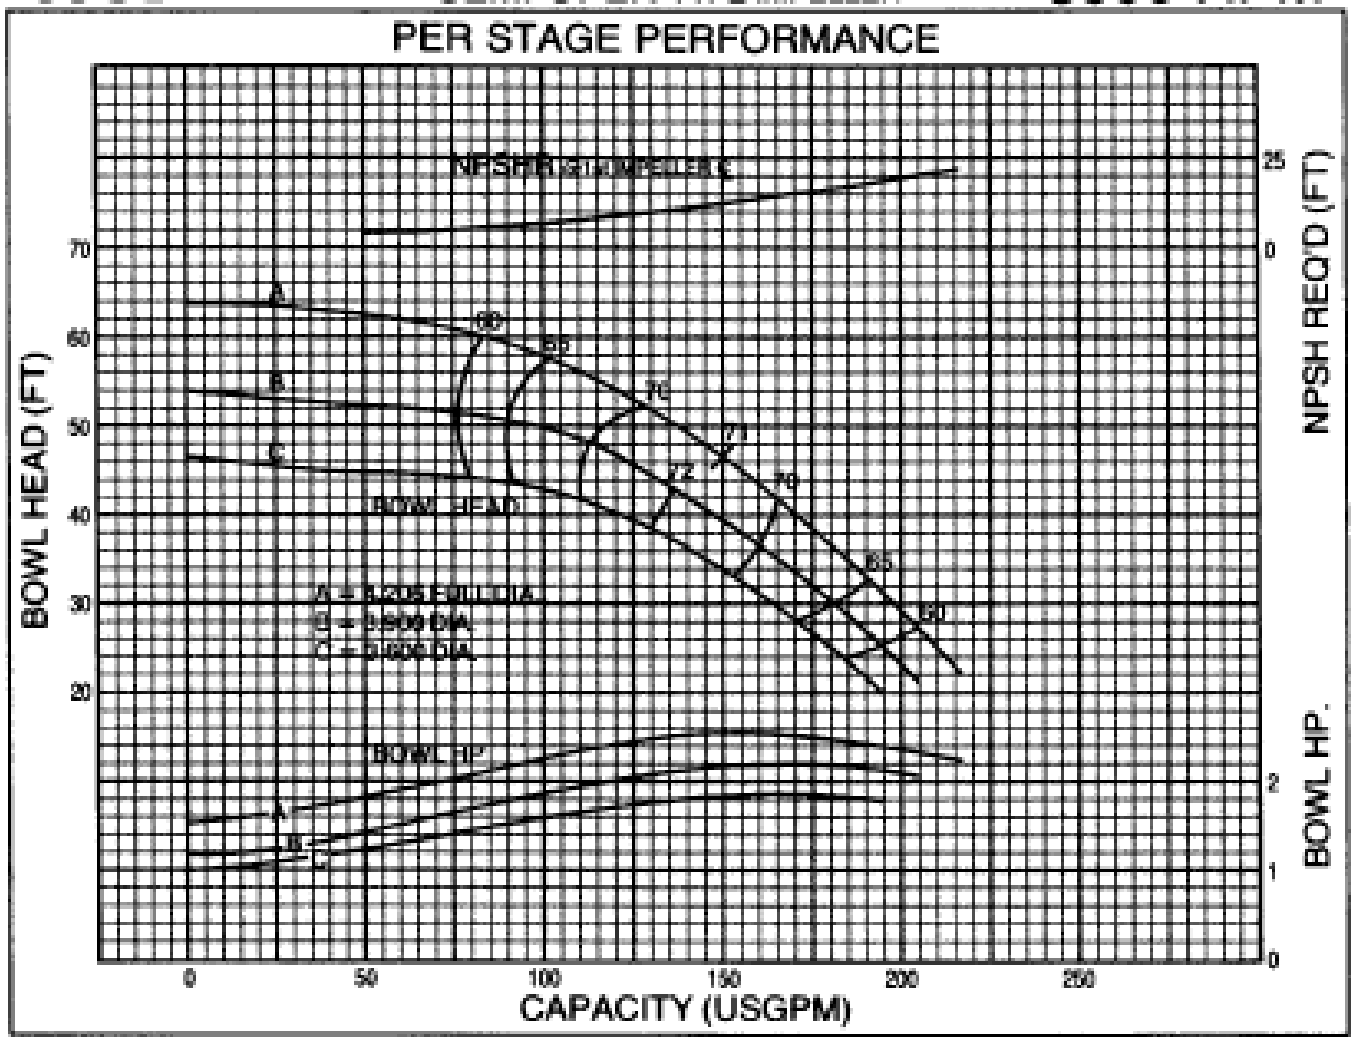
Efficiency improvements are available in certain instances. Please contact the factory.