3500 RPM SEMI-OPEN TYPE IMPELLER 8JOL

NO. OF STAGES	EFF. CHANGE (NO. OF POINTS)
1	−3
2	−1
3	−0

HORSEPOWER WILL BE EFFECTED BY CHANGE IN EFFICIENCY

PERFORMANCE FOR:
Bowl Pattern No.: 620000-B-R8
Imp. Pattern No.: 620048-A-R5

PUMP DATA

Shaft Dia. (IN.)	1 3/16
Maximum Sphere (IN.)	3/4
Maximum Head (FT.)*	957
Min. Submergence (IN.)**	11
Impeller Wt. (LBS.)	3.8
Thrust Constant (K)	4.4
Bowl O.D. (IN.)	7 3/4

NOTES

Performance indicated based on cold water with a specific gravity of 1.0.

* Standard construction.

** Minimum submergence over lip of bell to prevent vortexing.
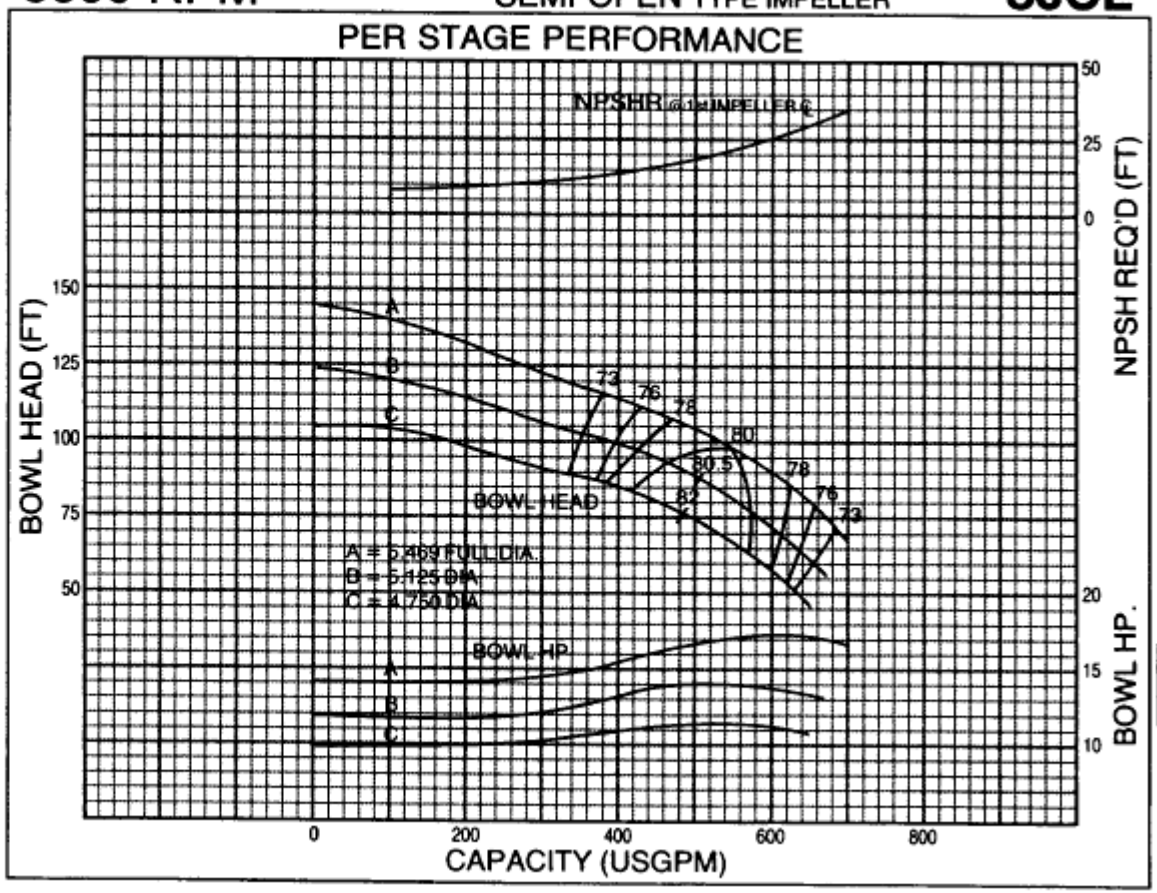
Efficiency improvements are available in certain instances. Please contact the factory.