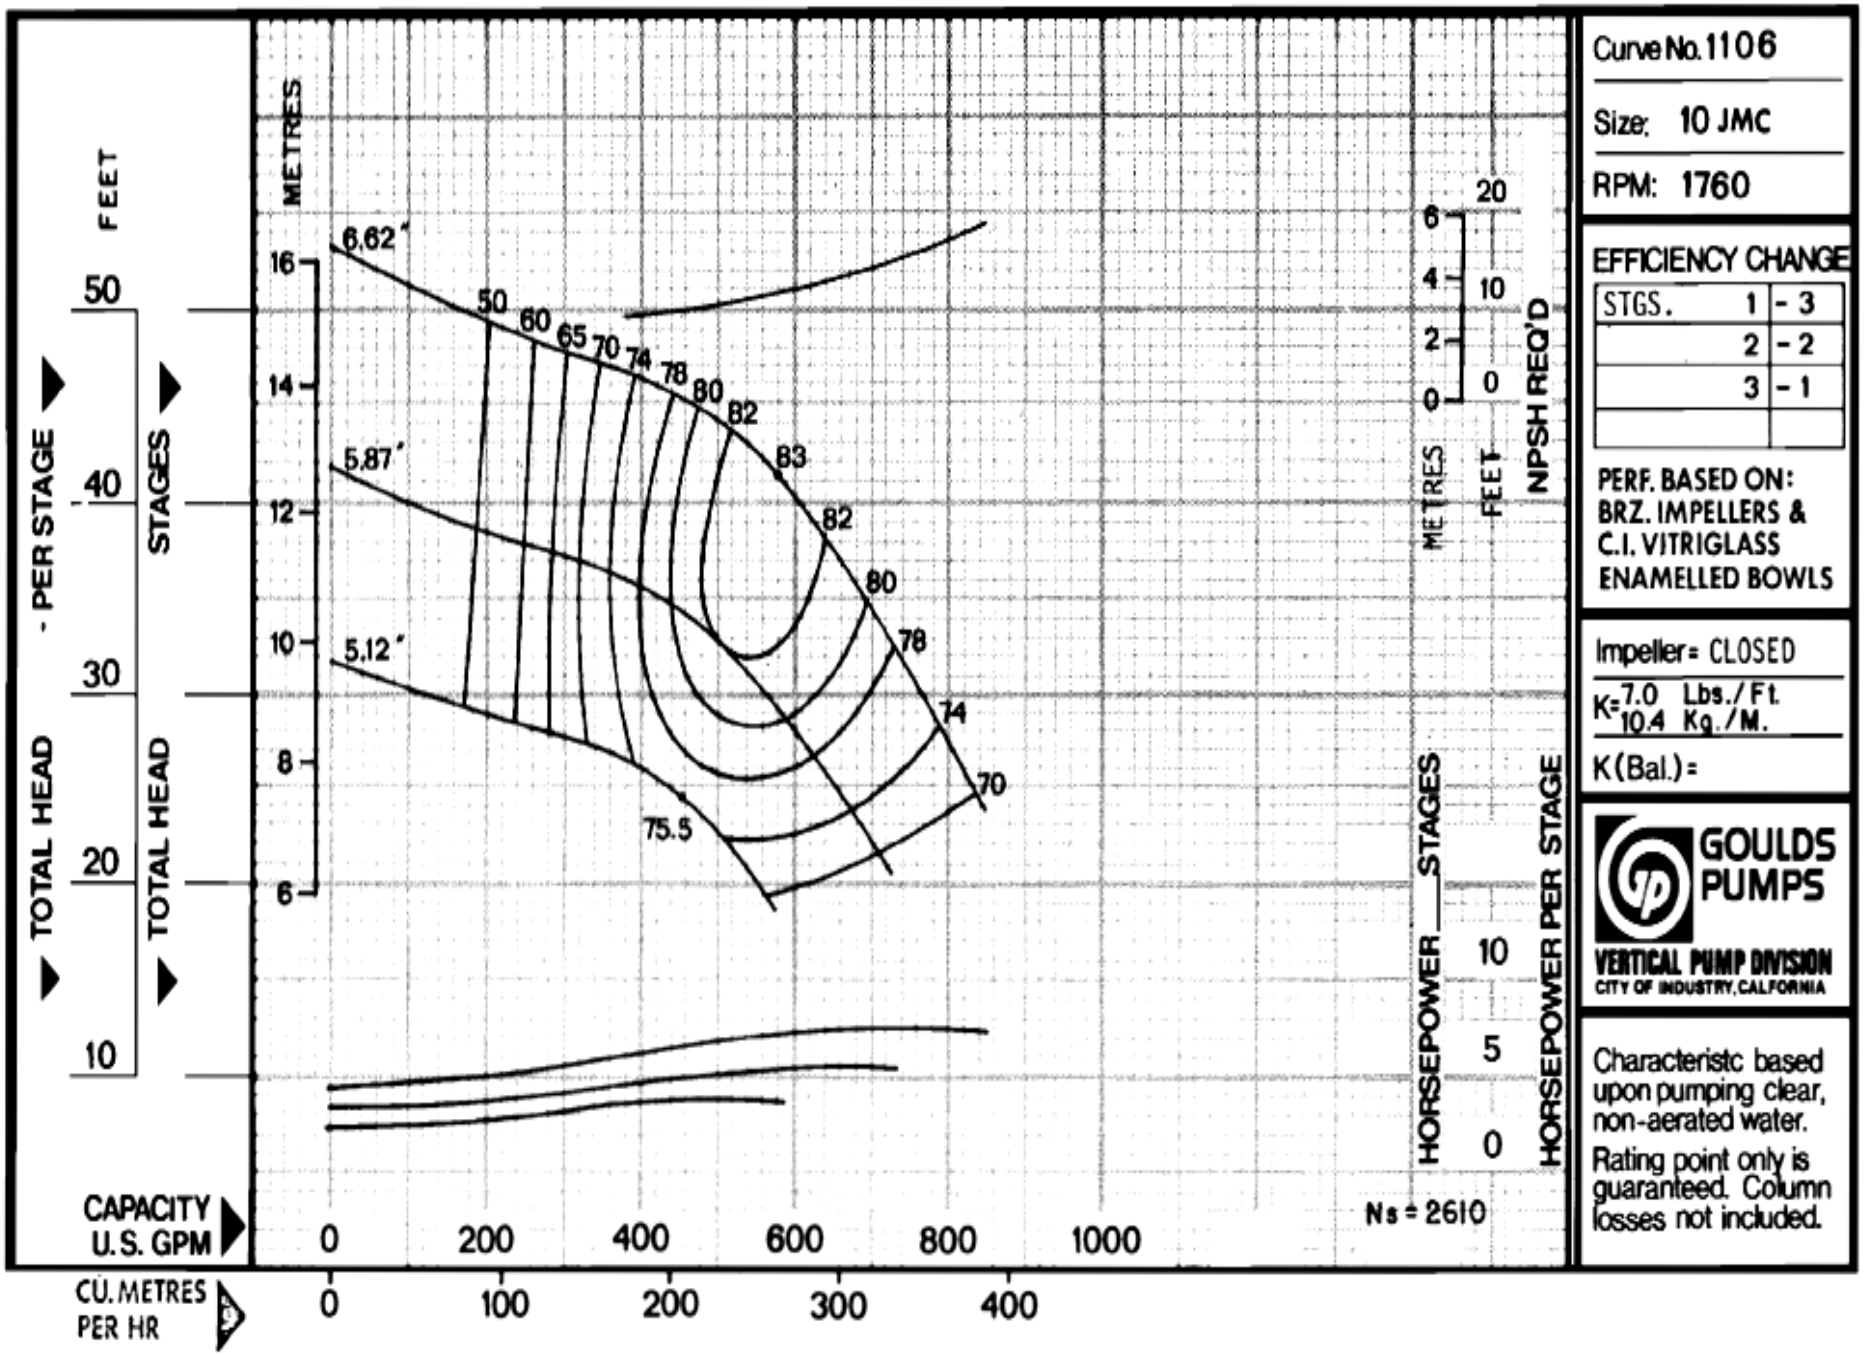
Curve No. 1106
Size: 10 JMC
RPM: 1760
EFFICIENCY CHANGE
STGS. 1 - 3
2 - 2
3 - 1
PERF. BASED ON:
BRZ. IMPELLERS &
C.I. VITRIGLASS
ENAMELLED BOWLS
Impeller = CLOSED
K = 7.0 Lbs./Ft.
10.4 Kg./M.
K (Bal.) =
GOULDS PUMPS
VERTICAL PUMP DIVISION
CITY OF INDUSTRY, CALFORNIA
Characteristc based upon pumping clear, non-aerated water.
Rating point only is guaranteed. Column losses not included.
TOTAL HEAD - PER STAGE
FEET
METRES
STAGES
TOTAL HEAD
6.62"
5.87"
5.12"
50
60
65
70
74
78
80
82
83
82
80
78
74
70
75.5
NPSH REQ'D
METRES
FEET
HORSEPOWER
STAGES
HORSEPOWER PER STAGE
Ns = 2610
CAPACITY U.S. GPM
CU. METRES PER HR