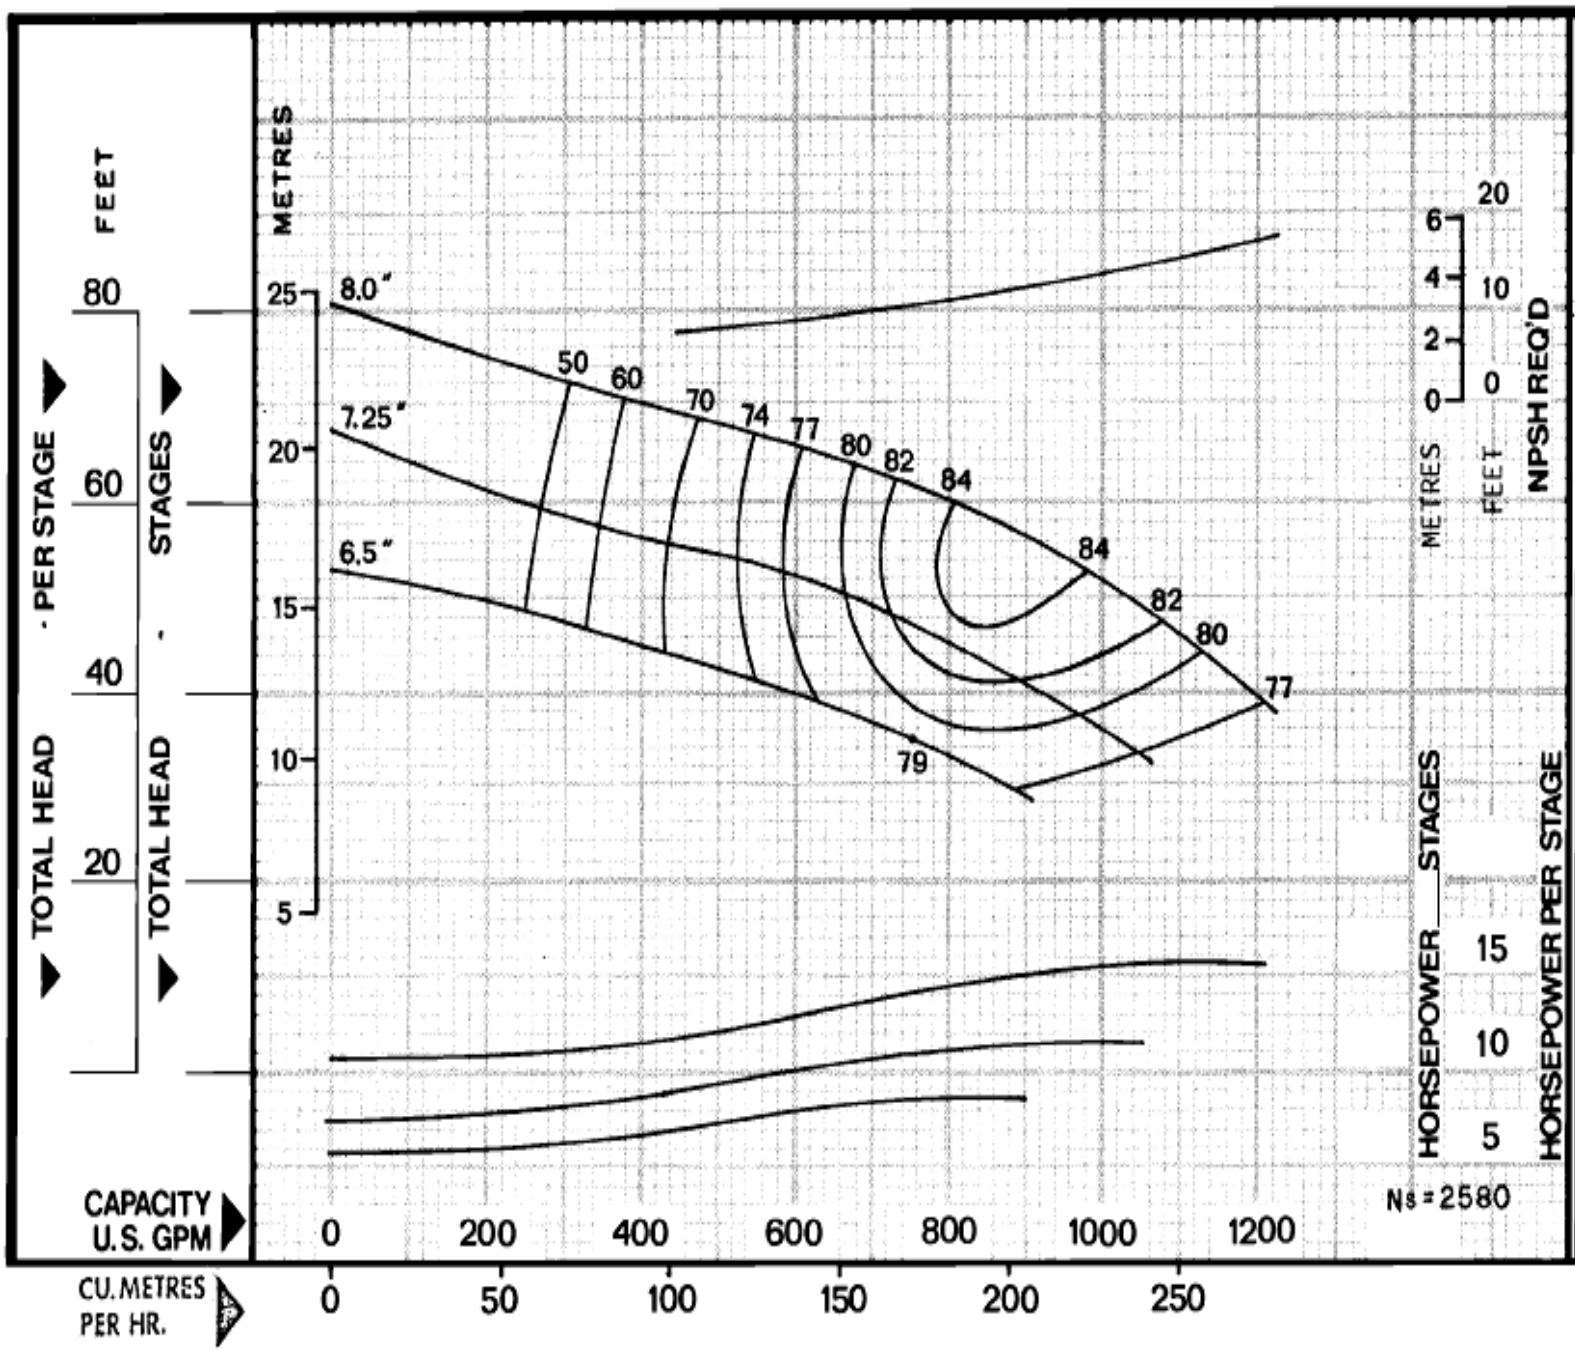

Curve No. 1113

Size: 12 JLC

RPM: 1760

EFFICIENCY CHANGE

STGS.		
	1	- 3
	2	-1.5
	3	- 1

PERF. BASED ON: BRZ. IMPELLERS & C.I. VITRIGLASS ENAMELLED BOWLS

Impeller = CLOSED

K = 10.0 Lbs./Ft. / 14.9 Kg./M.

K (Bal.) =

GOULDS PUMPS

VERTICAL PUMP DIVISION

CITY OF INDUSTRY, CALFORNIA

Characteristc based upon pumping clear, non-aerated water.

Rating point only is guaranteed. Column losses not included.