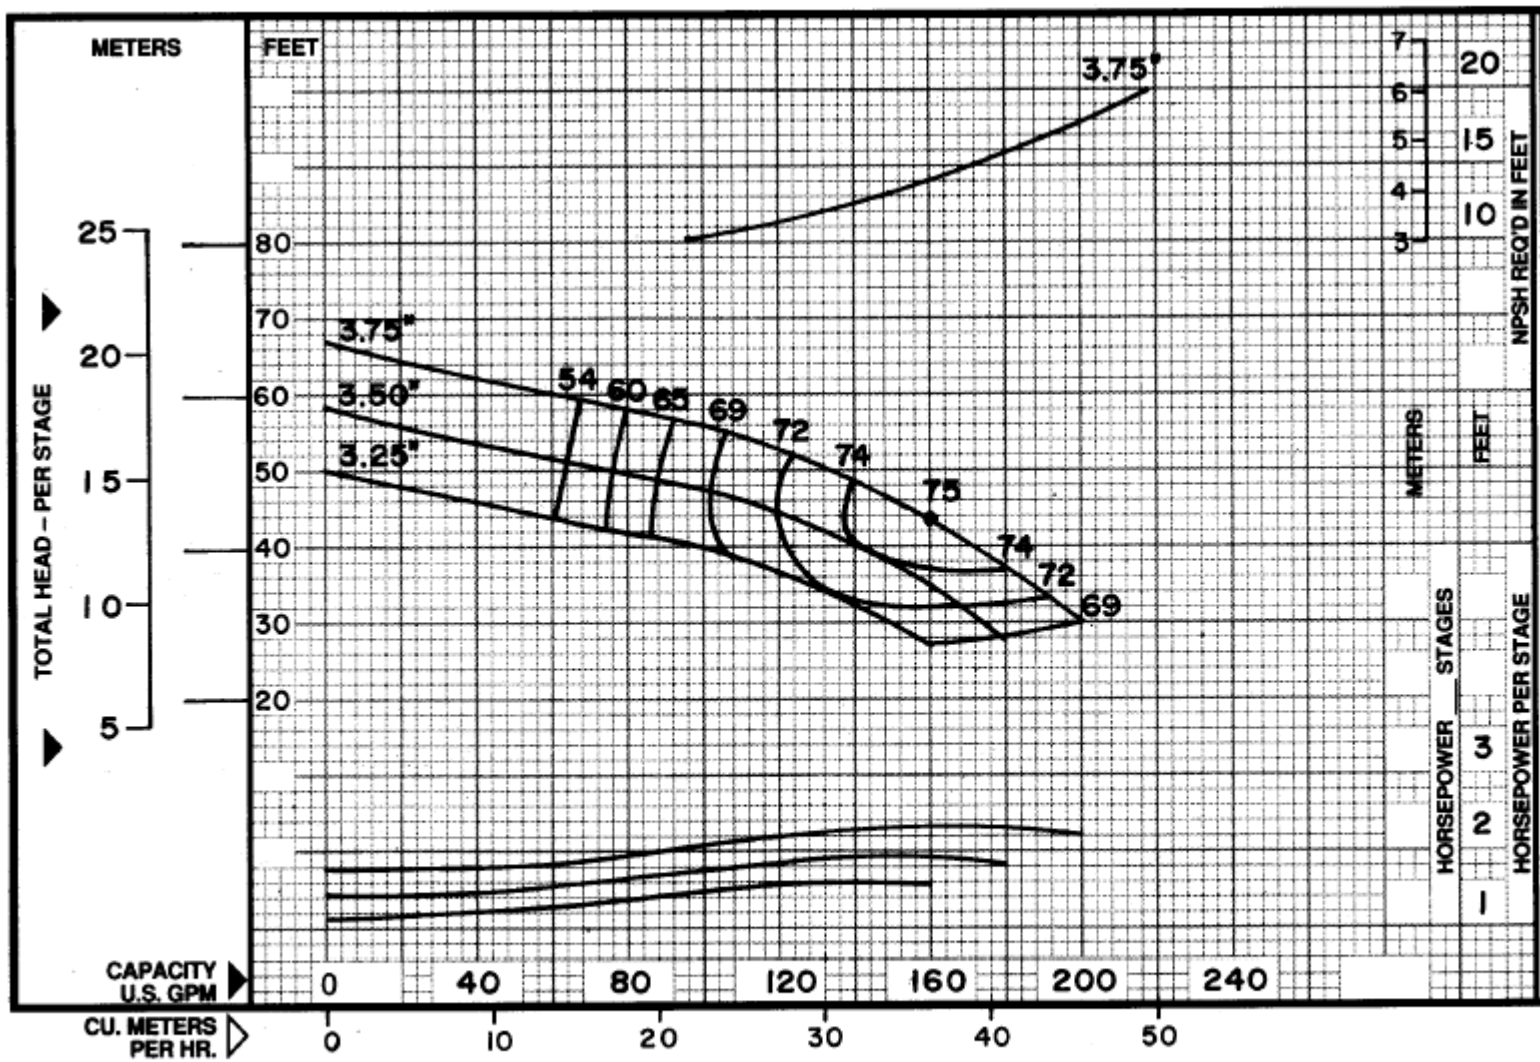

Curve No. 3018

Model: 6CJLC

RPM: 3500

EFFICIENCY CORRECTION

STGS. 1	-6.0
STGS. 2	-5.0
STGS. 3	-2.5
STGS. 4	-1.0

PERF BASED ON STD. MTL'S

Impeller= CLOSED

N_S= 2627

K= 1.8 LBS/FT
2.7 KG/M

K (Bal.)=

GOULDS PUMPS
TURBINE DIVISION
LUBBOCK, TEXAS

Characteristics based upon pumping clear, non-aerated water. Rating point only is guaranteed. Column losses not included.

MODEL 6CJLC

DATE May 1990

Targeted for Obsolescence