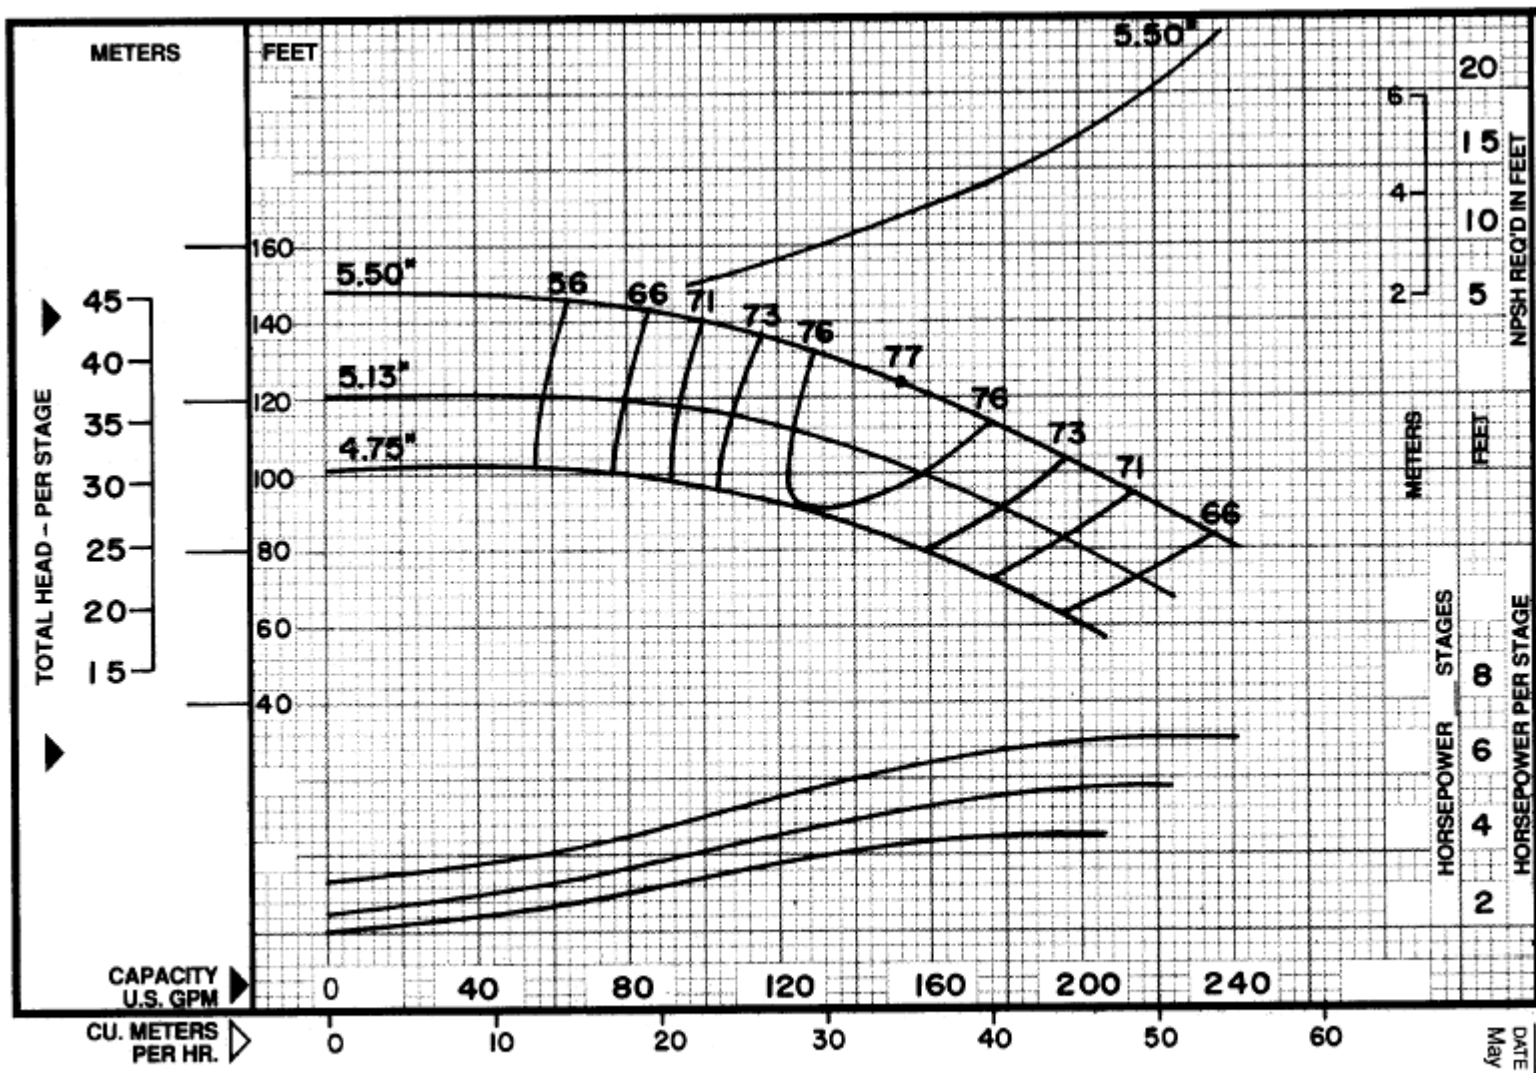

Curve No. 1022-5

Model: 8RAHC

RPM: 3550

EFFICIENCY CORRECTION

STGS. 1	-4.0
STGS. 2	-2.0
STGS. 3	-1.0

PERF BASED ON STD. MTL'S

Impeller= S194

N_S= 1185

K= 2.00 LBS/FT
2.98 KG/M

K (Bal.)=

GOULDS PUMPS
TURBINE DIVISION
LUBBOCK, TEXAS

Characteristics based upon pumping clear, non-aerated water. Rating point only is guaranteed. Column losses not included.

MODEL 8RAHC

DATE May 1990