


|                     |                 |             |                   |           |              |          |
|---------------------|-----------------|-------------|-------------------|-----------|--------------|----------|
| GOULDS PROPOSAL NO. | GOULDS S.O. NO. | INQUIRY NO. | CUSTOMER P.O. NO. | P.O. DATE | ITEM NO.     | CUSTOMER |
| PROJECT             | SERVICE         |             | GPM CAPACITY      | FT. TDH   | % EFFICIENCY | RPM      |

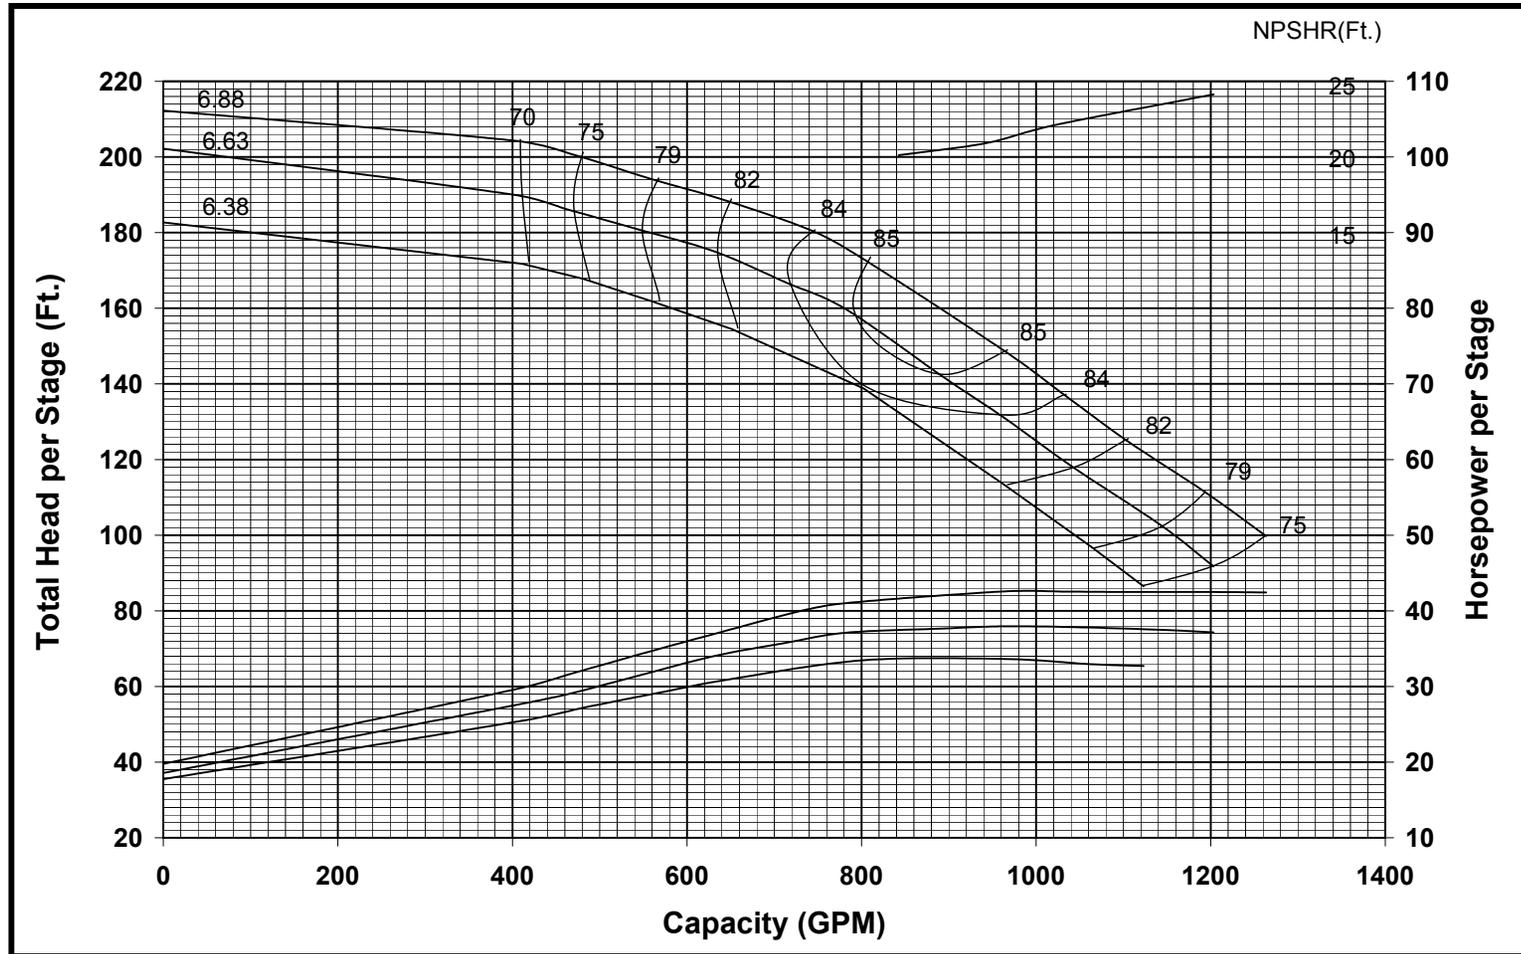

|  |                   |
|--|-------------------|
| <b>Curve No.</b>   |                   |
| <b>E6209CFPC0</b>  |                   |
| <b>Model</b>   | <b>9RCLO</b>      |
| <b>RPM</b>   | <b>3550</b>       |
| <b>EFFICIENCY CORRECTION</b>   |                   |
| 1-STAGE  | -2.0              |
| 2-STAGE  | -1.0              |
| 3-STAGE  | -0.5              |
| 4-STAGE  | 0.0               |
| <b>Impeller</b>  | <b>OPEN</b>       |
| <b>Ns =</b>  | <b>2334</b>       |
| <b>K =</b>   | <b>6.0 LBS/FT</b> |
| <b>K(Bal.)=</b>  | <b>N/A</b>        |
| Bowl O.D.  | 9.25"             |
| Bowl Lateral   | 0.88"             |
| Max. PSI   | 400               |
| Disch size   | 5", 6", 8"        |
| <b>GOULDS PUMPS</b>  |                   |
| <b>TURBINE OPERATIONS</b>  |                   |
| Lubbock, Texas   |                   |
| BOWL PERFORMANCE CURVE<br>BASED ON PUMPING CLEAR,<br>NON-AERATED WATER.<br>RATED POINT ONLY IS<br>GUARANTEED. CURVES<br>REPRESENT SINGLE STAGE<br>PERFORMANCE BASED ON<br>TEST OF MULTI-STAGE BOWL<br>ASSEMBLY. EFFICIENCY<br>ASSEMBLY. EFFICIENCY<br>ASSEMBLY. EFFICIENCY |                   |