PER STAGE	IMP. DIA	IMP. EXIT	IMPELLER PART NO. 16521	THRUST CONSTANT 42	PUMP SHAFT DIAM. $1\frac{15}{16}$"
			IMPELLER PATTERN NO. 15773	WR² 4.8 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 35 INCHES

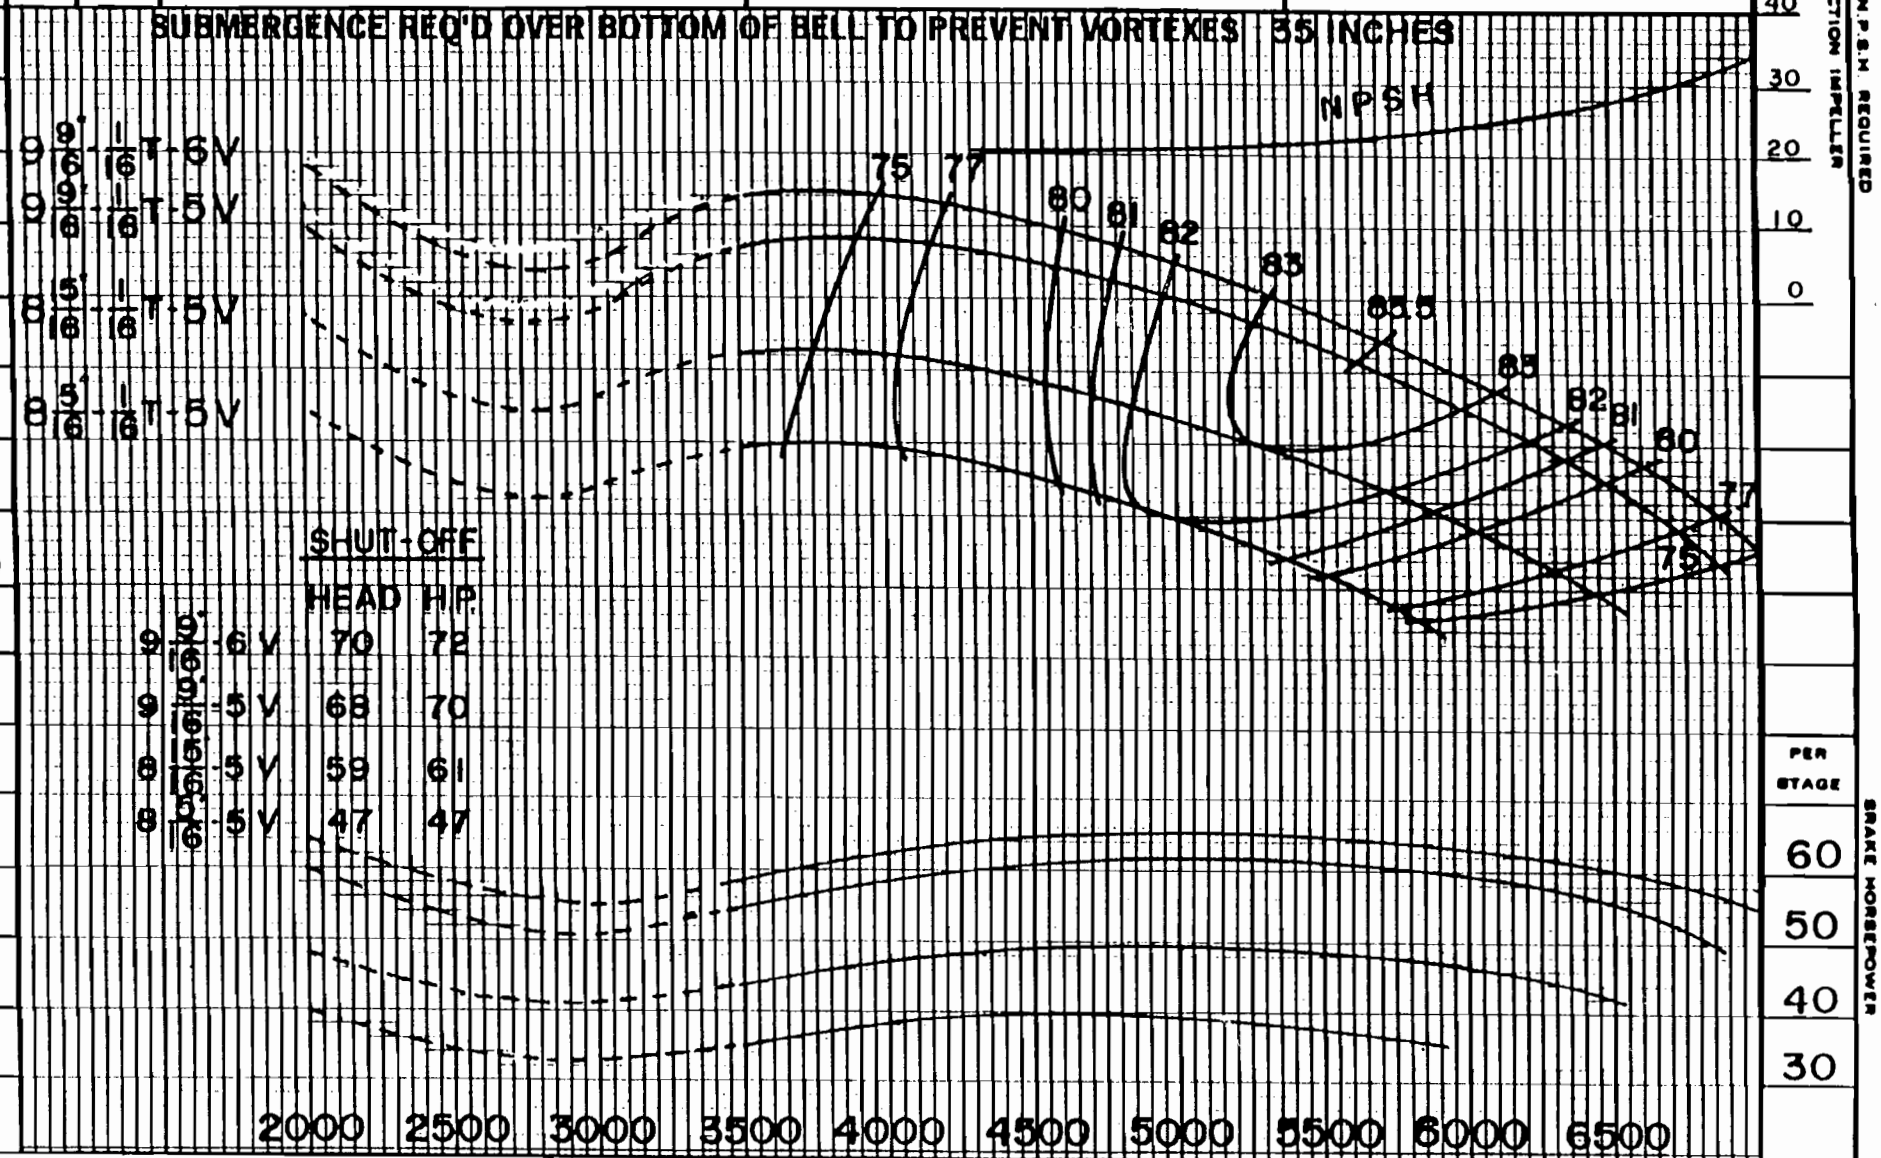

SHUT-OFF	HEAD	H.P.
9 9/16" - 6 V	70	72
9 9/16" - 5 V	68	70
8 5/16" - 5 V	59	61
8 5/16" - 5 V	47	47

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD & EFF. BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

14PS MIXED-FLOW PUMP

1180 RPM

IMPELLER — BRONZE
BOWL — CAST IRON

CLASS 'C' FIN.