| PER STAGE | IMP. DIA. | IMP. EXIT | IMPELLER PART NO. 16623 | THRUST CONSTANT 14 | PUMP SHAFT DIAM. 1" |
|---|---|---|---|---|---|
| | | | IMPELLER PATTERN NO. 16025 | WR² 0.32 LB. FT²/STAGE | |

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 21 INCHES

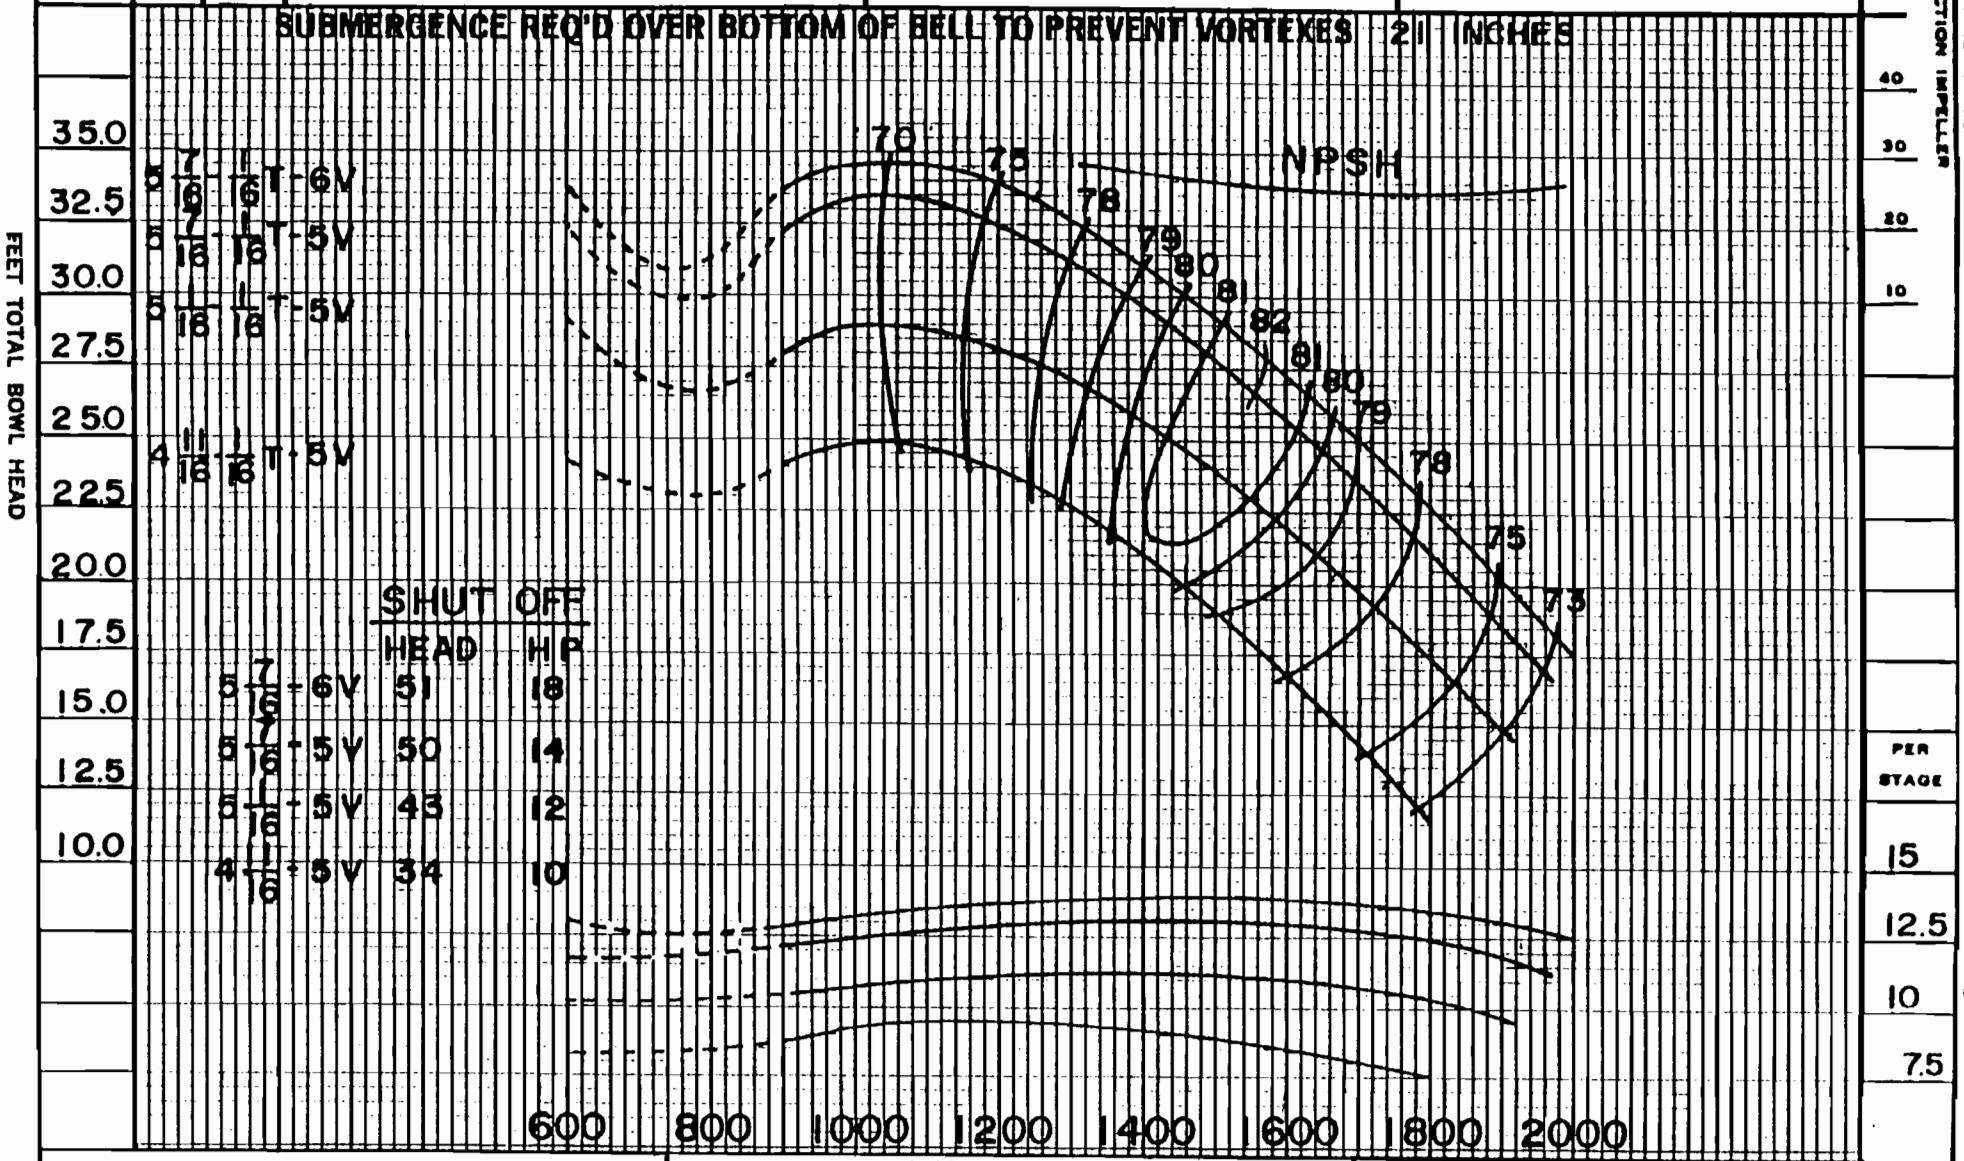


PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD & EFF BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

8 PS MIXED-FLOW PUMP

1760 RPM

IMPELLER — BRONZE
BOWL — CAST IRON
CLASS 'C' FIN.