PER STAGE	IMP. DIA	IMP. EXIT	IMPELLER PART NO. 9937	THRUST CONSTANT 282	PUMP SHAFT DIAM. 4"
			IMPELLER PATTERN NO. 9298	WR² 560 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 89 INCHES

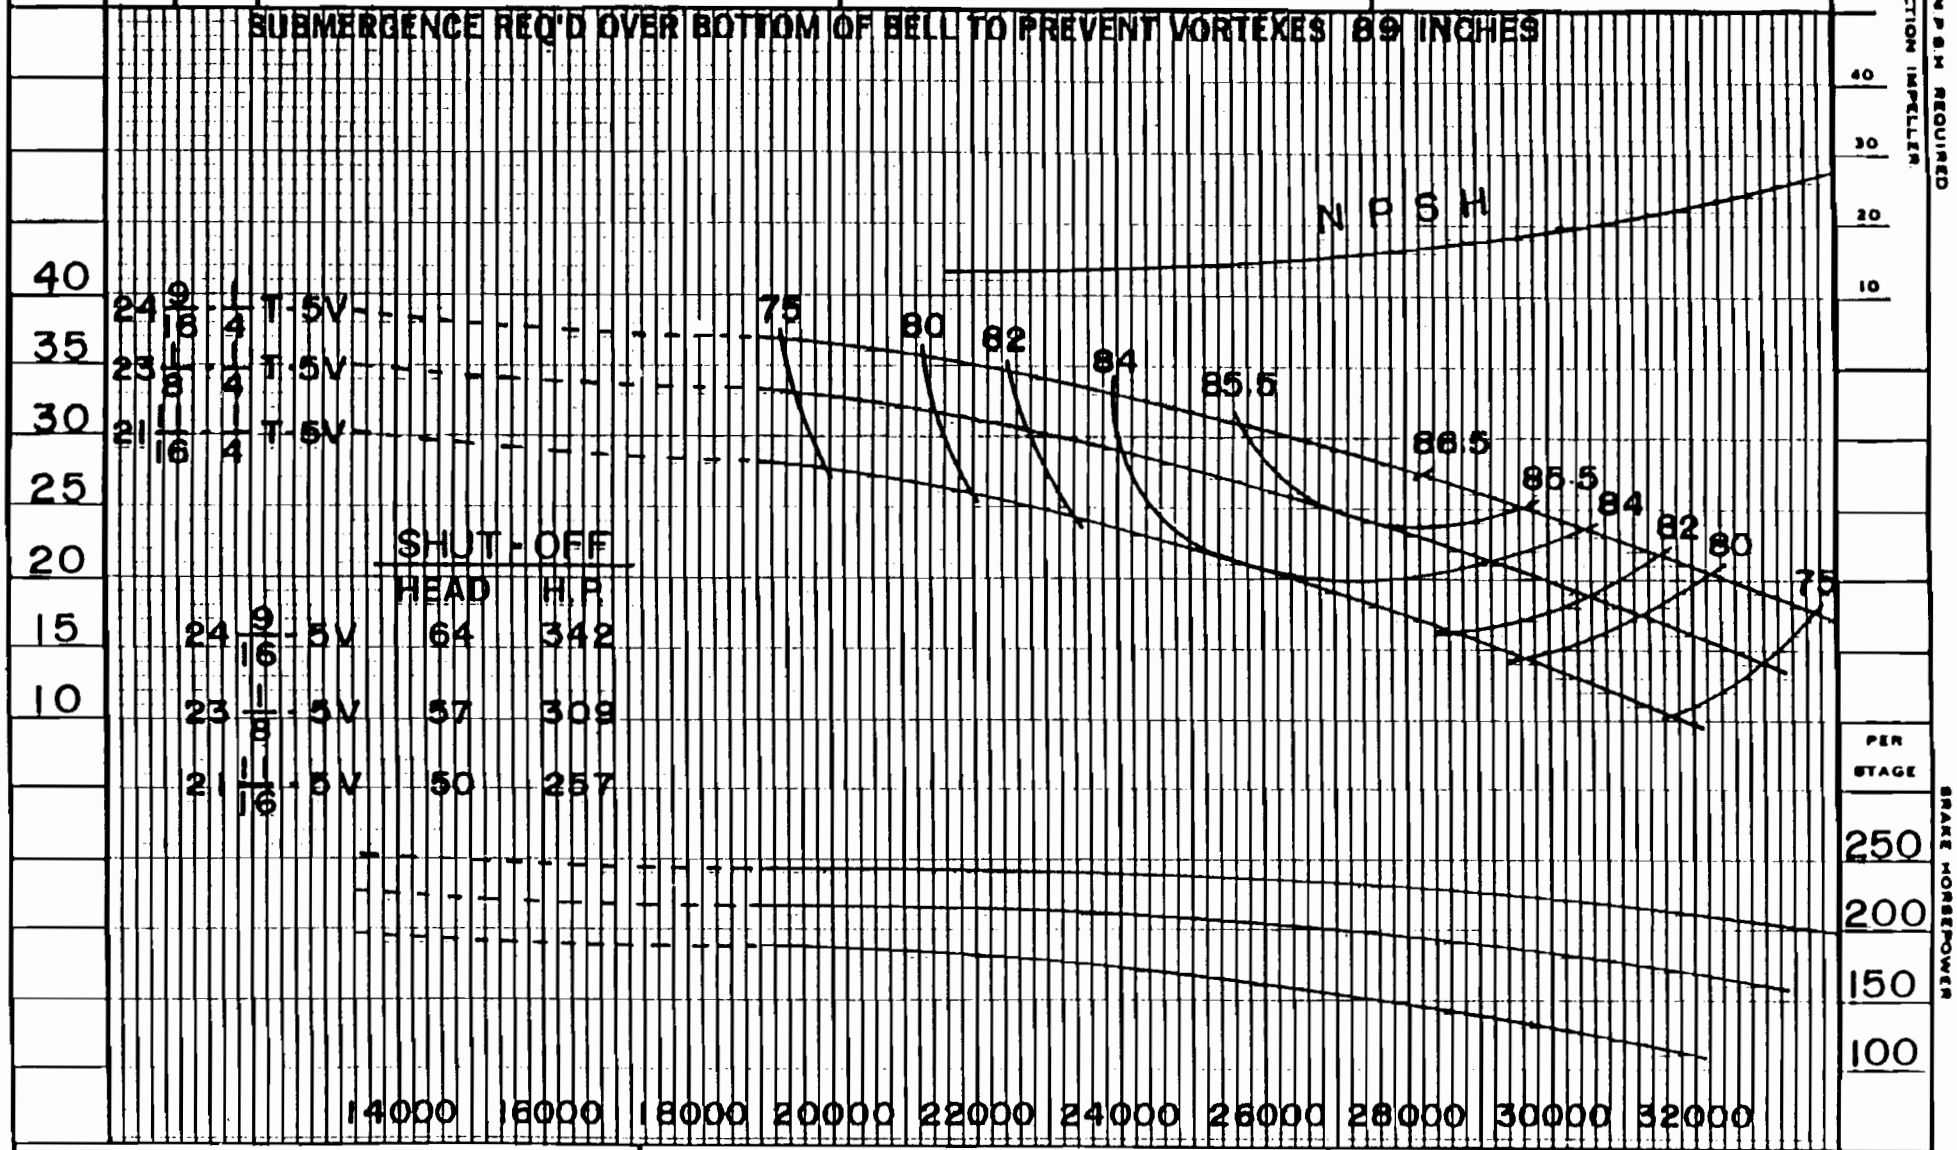

SHUT-OFF	HEAD	H.P.
24 9/16 - 5V	64	342
23 1/8 - 5V	57	309
21 1/16 - 5V	50	257

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF BY 1.0
FOR 2 STAGES MULTIPLY HD & EFF BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

36LS MIXED-FLOW PUMP 440 RPM
IMPELLER — BRONZE BOWL — CAST IRON
CLASS 'C' FIN.