PER STAGE	IMP. DIA	IMP. EXIT	IMPELLER PART NO. 7188	THRUST CONSTANT 594	PUMP SHAFT DIAM. 4"
			IMPELLER PATTERN NO. 7241	WR² 680 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 126"

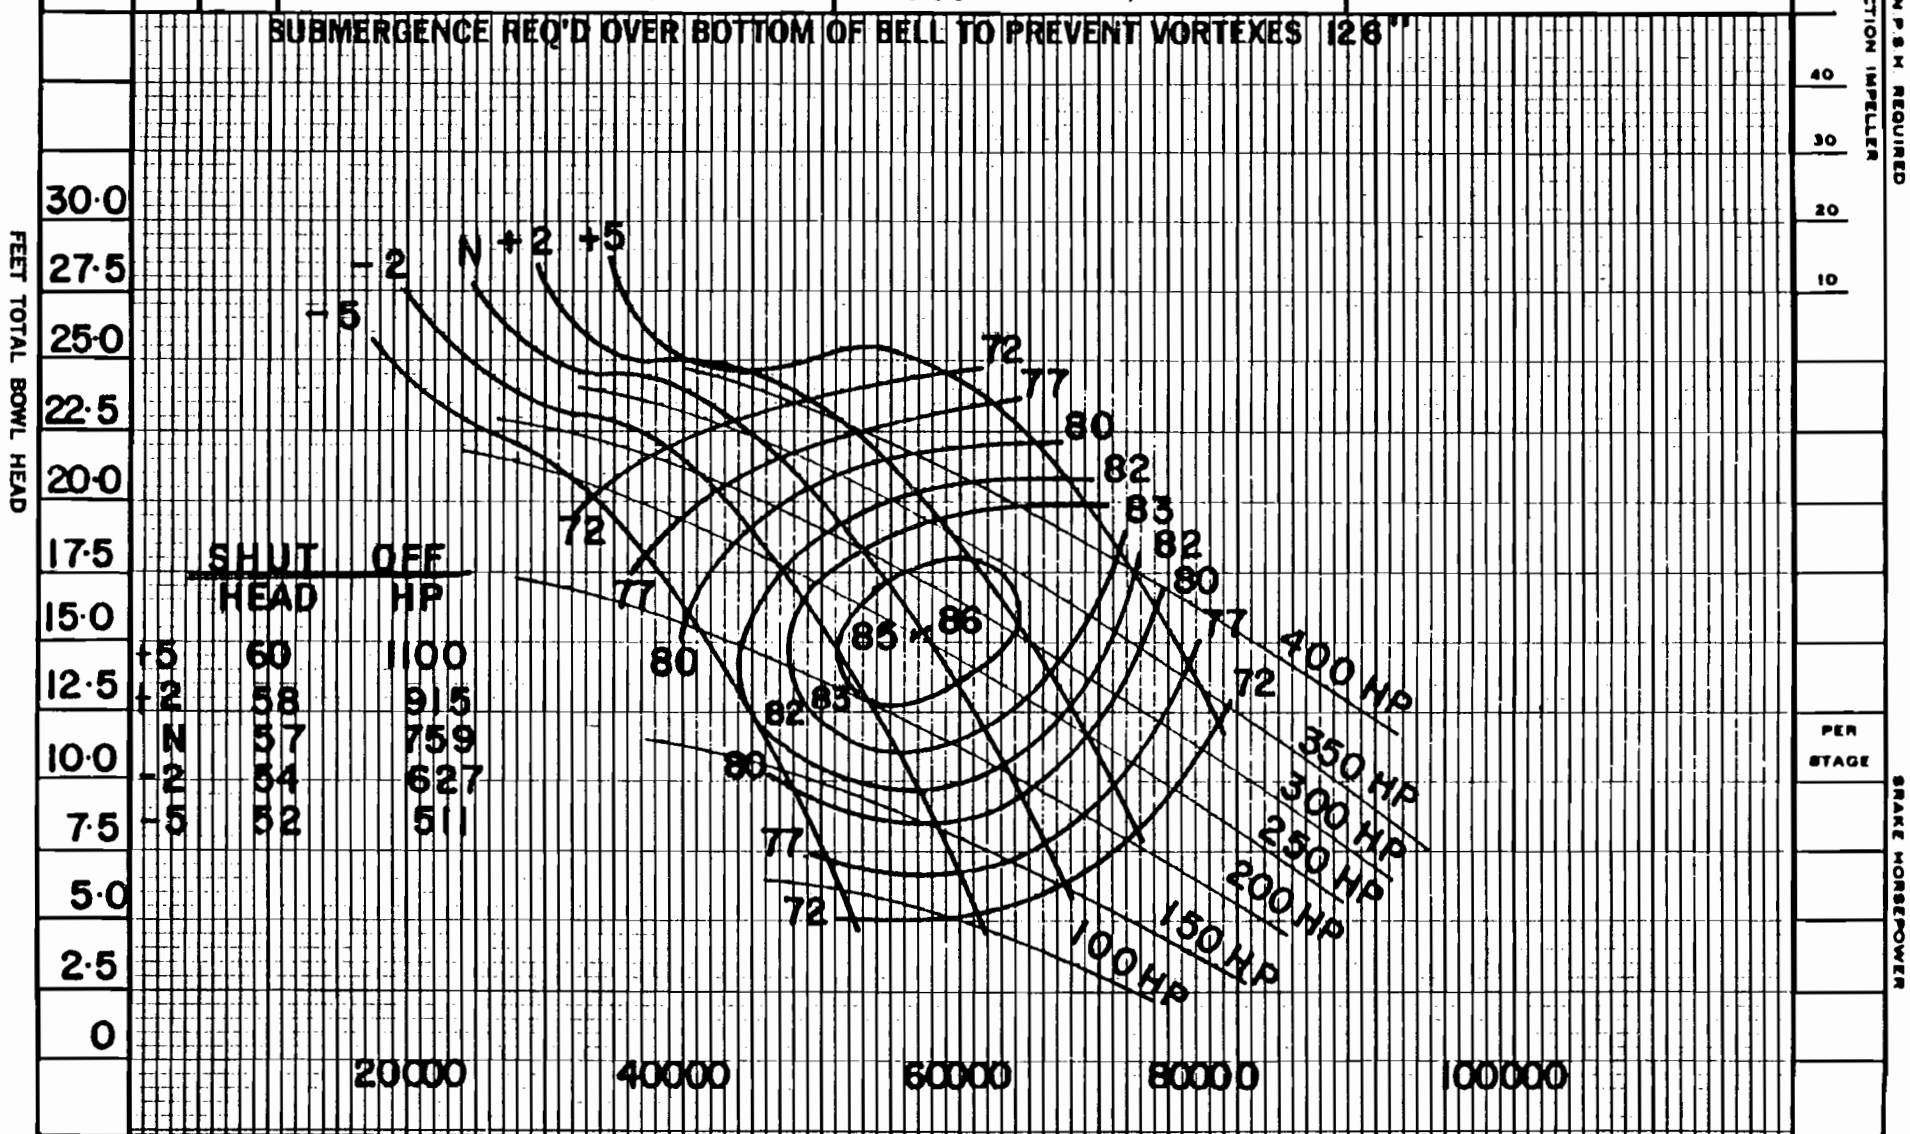

	SHUT OFF HEAD	SHUT OFF HP
+5	60	1100
+2	58	915
N	57	759
-2	54	627
-5	52	511

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1 0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1·0
FOR 2 STAGES MULTIPLY HD & EFF BY 1·0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

42 PO PROPELLER PUMP 440 RPM
IMPELLER — BRONZE BOWL — CAST IRON