PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 9872 IMPELLER PATTERN NO. 9295	THRUST CONSTANT 125 WR² 76 LB. FT²/STAGE	PUMP SHAFT DIAM. $2\frac{11}{16}$"

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 59"

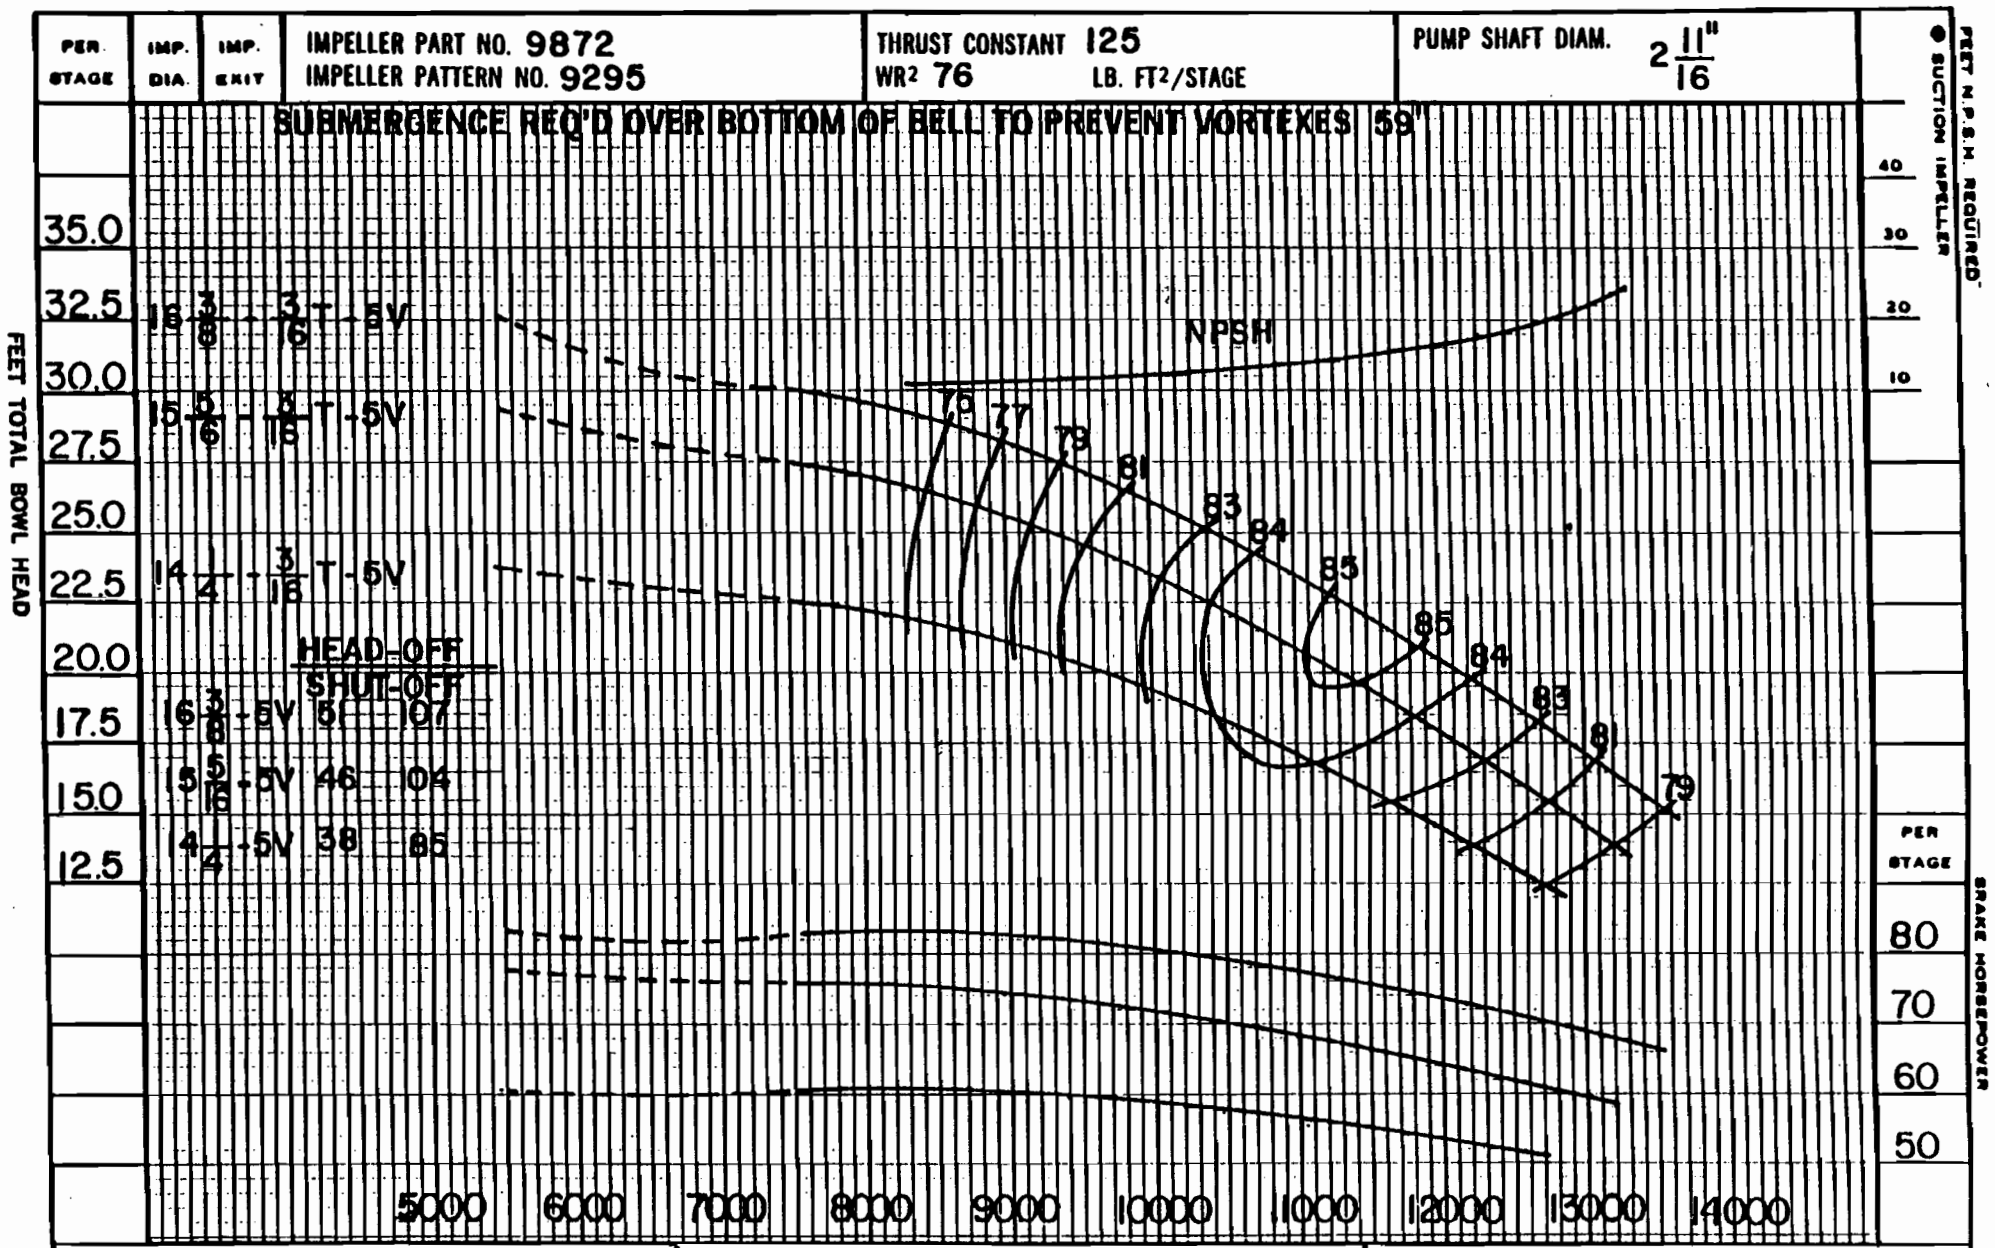

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR 2 STAGES MULTIPLY HD. & EFF BY 1.00

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

24LS MIXED-FLOW PUMP — 590 RPM

IMPELLER — BRONZE BOWL — CAST IRON

CLASS 'C' FIN.