PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 3608	THRUST CONSTANT 437	PUMP SHAFT DIAM. $3\frac{3}{16}$
			IMPELLER PATTERN NO. 3570	WR² 280 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 105 INCHES

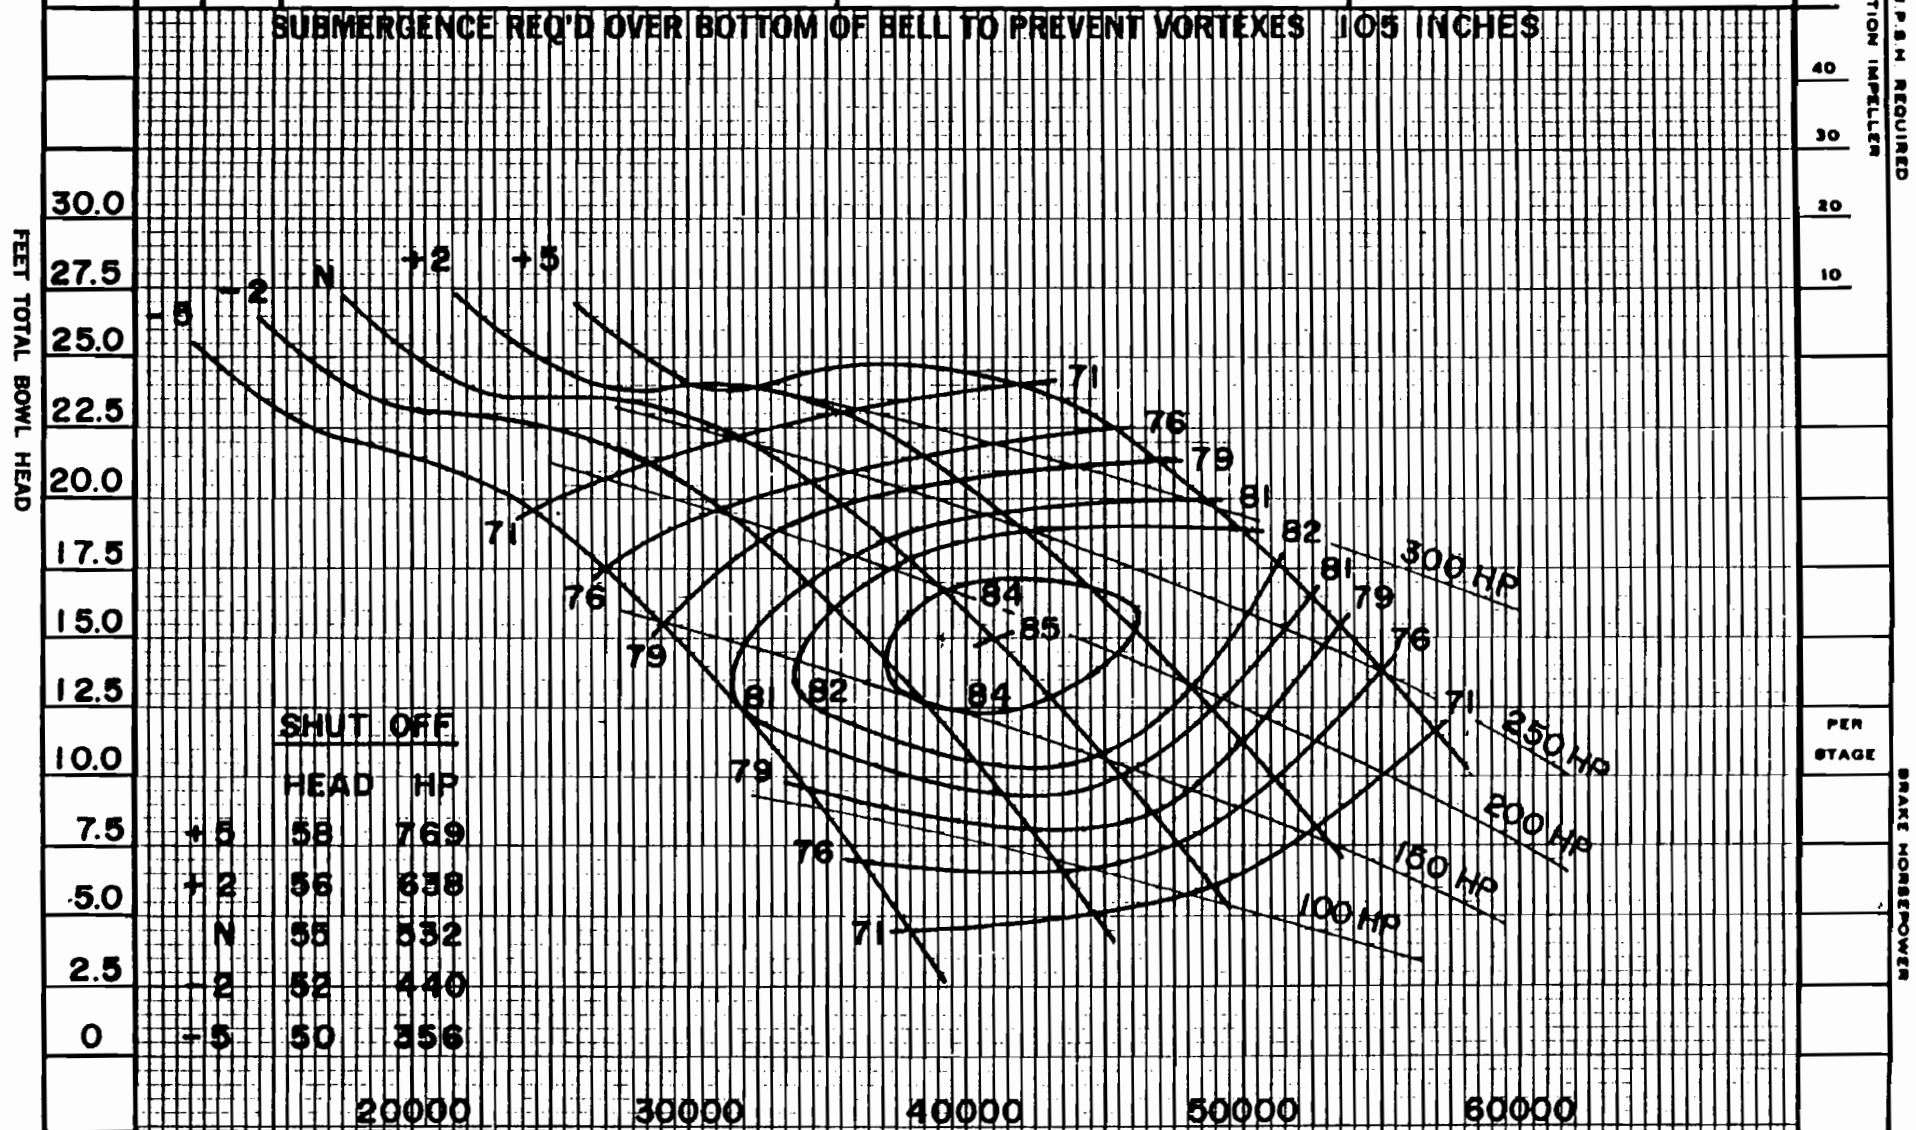

SHUT OFF

	HEAD	HP
+5	58	769
+2	56	638
N	55	532
-2	52	440
-5	50	356

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP GR 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

36 PO PROPELLER PUMP 500 RPM

IMPELLER — BRONZE BOWL — CAST IRON