PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 2868	THRUST CONSTANT 66·0	PUMP SHAFT DIAM. $1\frac{11}{16}$
			IMPELLER PATTERN NO. 4717	WR^2 3·4 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 38"

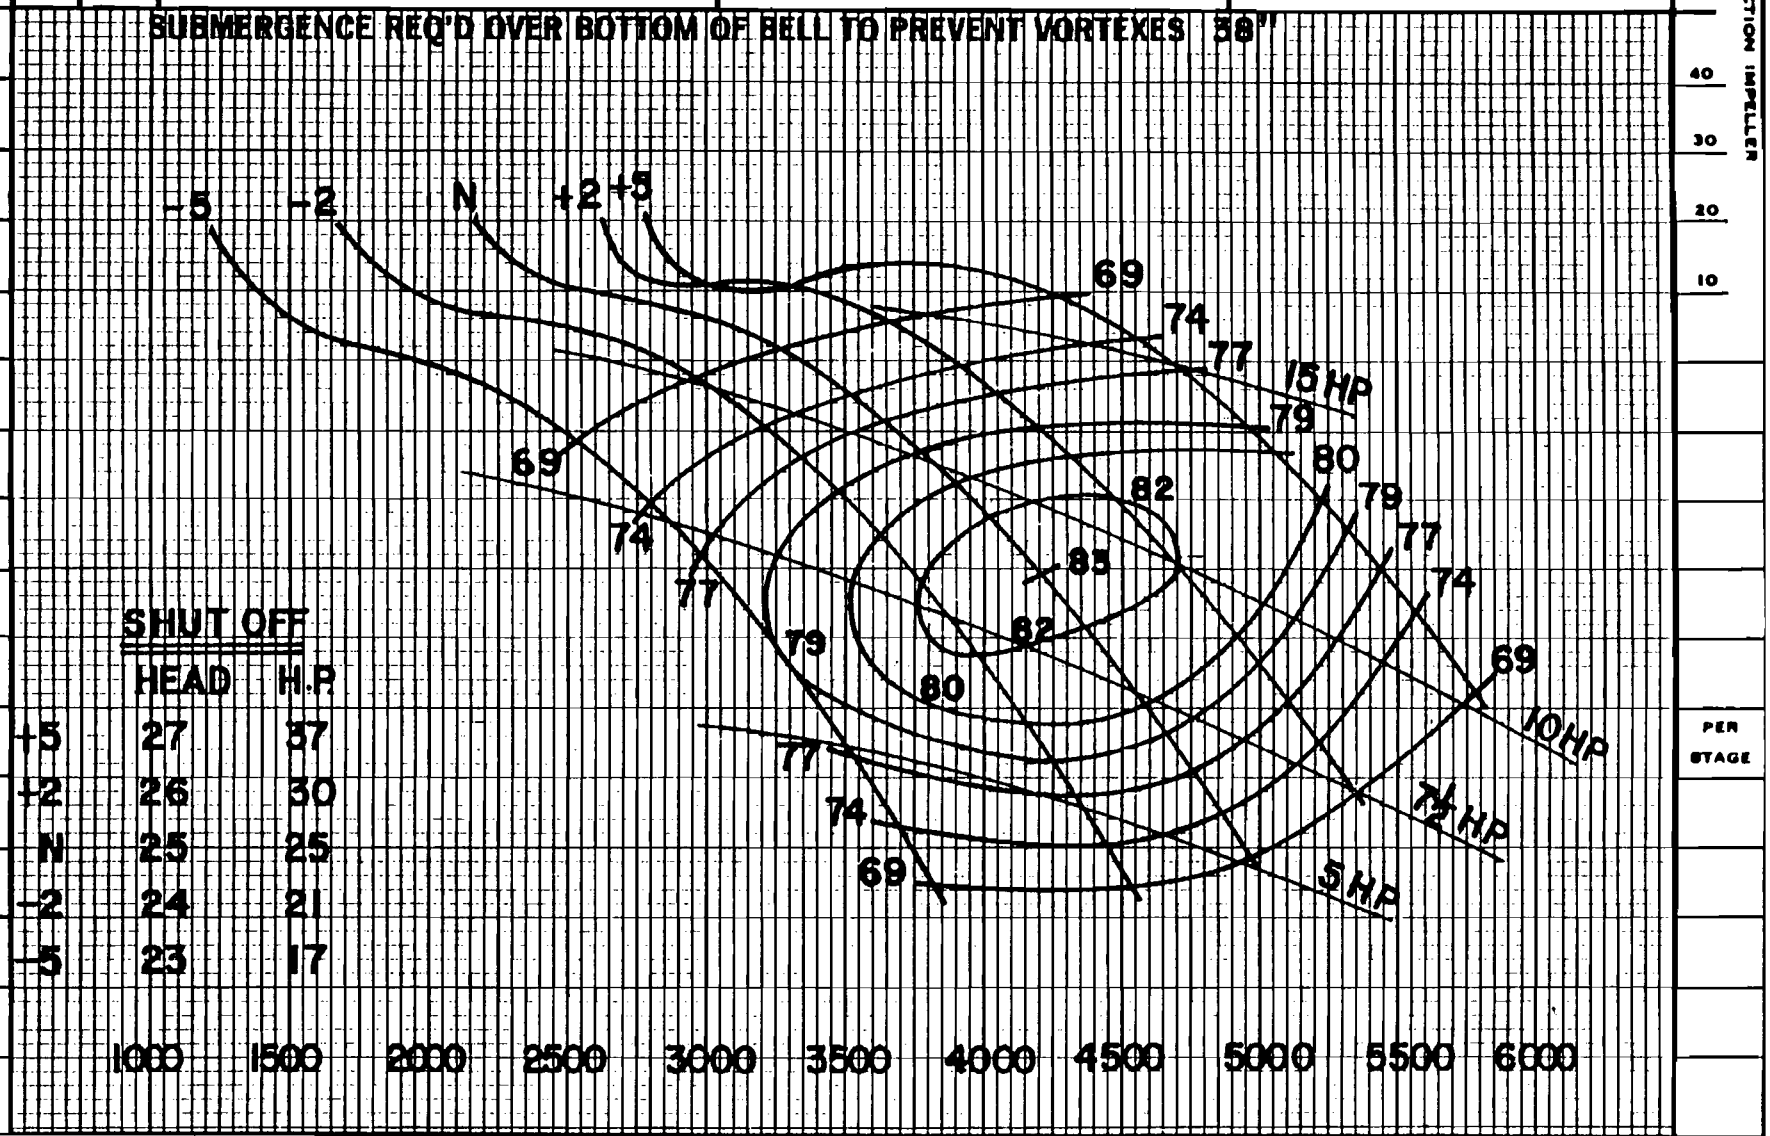

	HEAD	H.P.
+5	27	37
+2	26	30
N	25	25
-2	24	21
-5	23	17

SHUT OFF

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP GR 1 0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1·0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1·0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

14 PO PROPELLER PUMP 875 RPM

IMPELLER — BRONZE BOWL — CAST IRON