PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 14693 / IMPELLER PATTERN NO. 14692	THRUST CONSTANT 87 / WR² 29 LB. FT²/STAGE	PUMP SHAFT DIAM. 2 11/16

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 50 INCHES

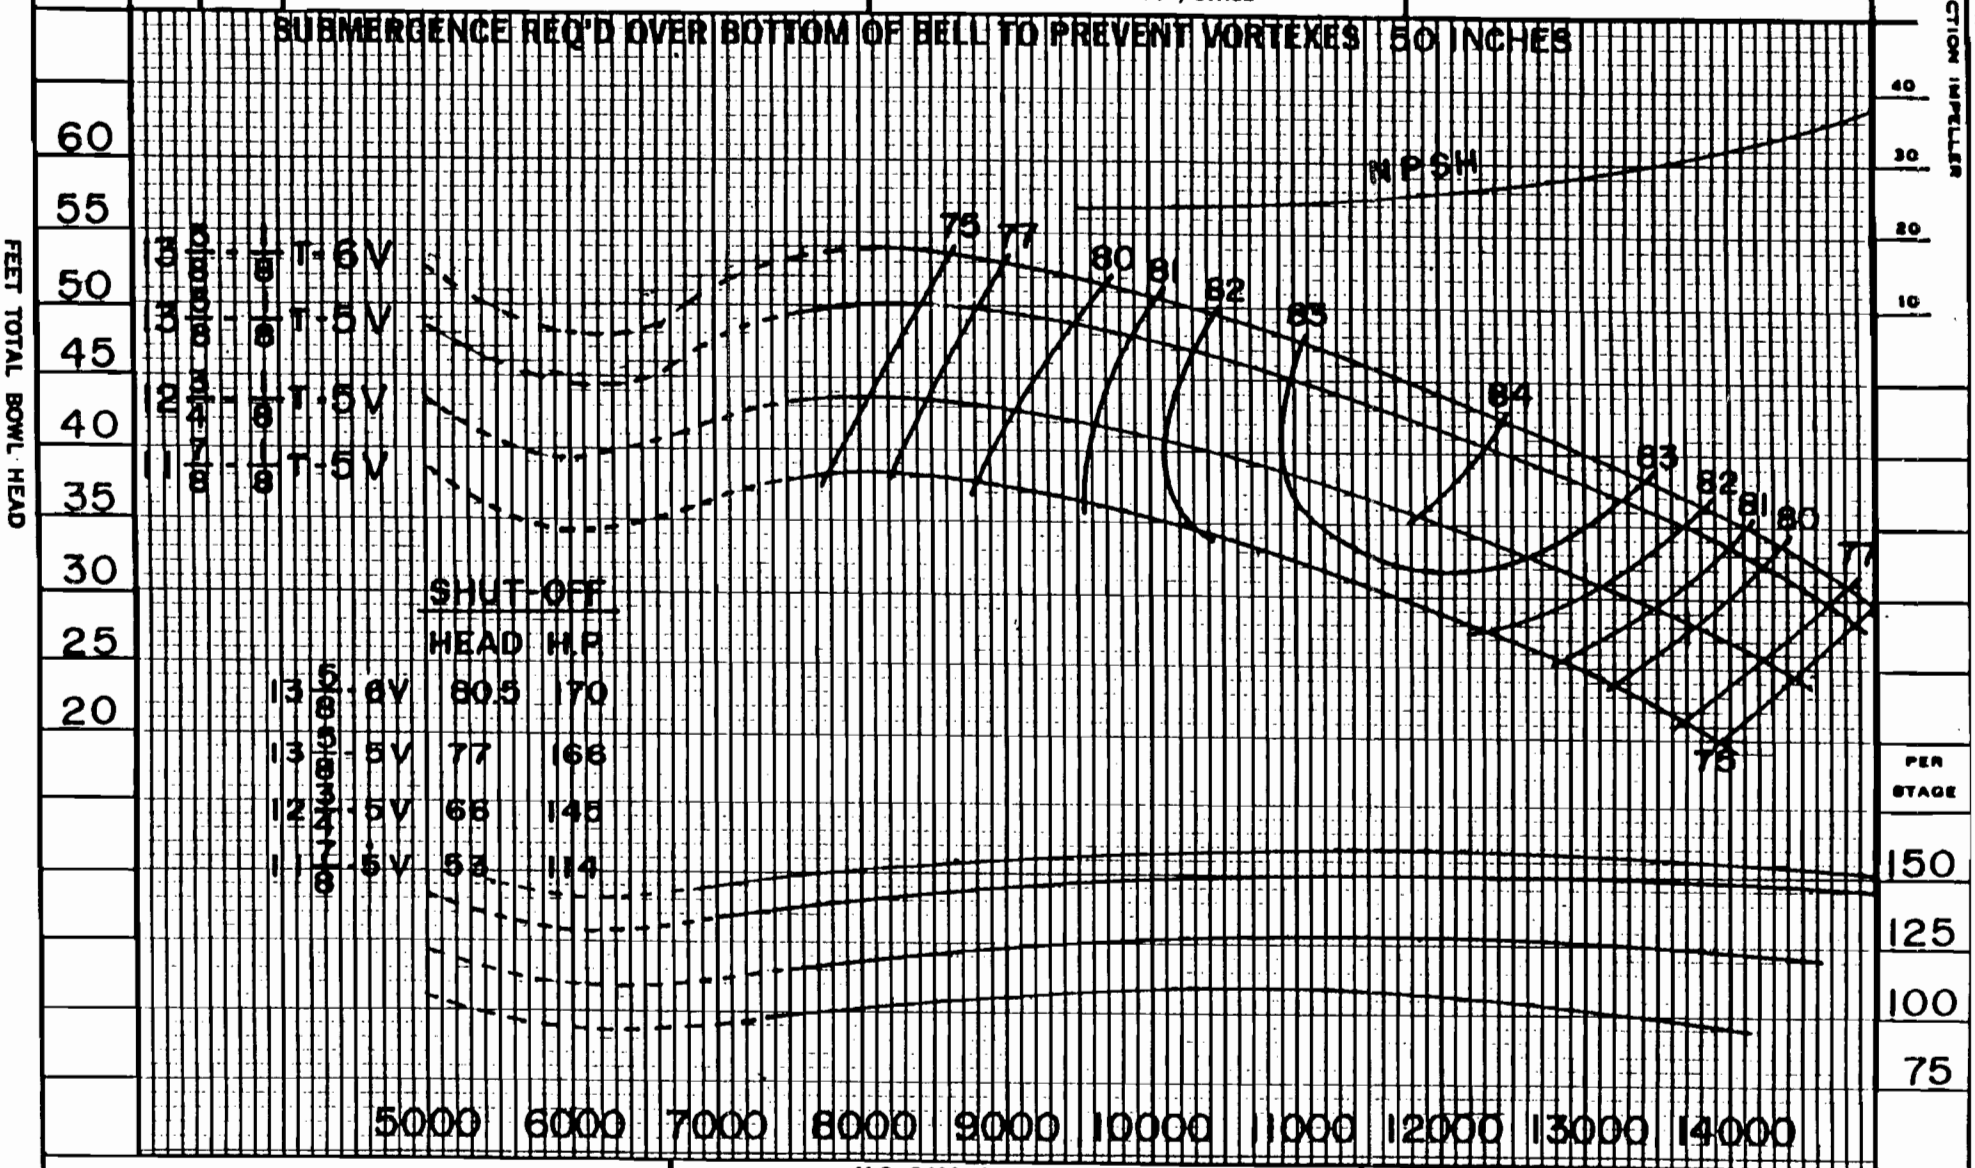

	SHUT-OFF HEAD	H.P.
13 5/8 - 6V	80.5	170
13 5/8 - 5V	77	166
12 3/4 - 5V	66	145
11 7/8 - 5V	53	114

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

THE IDEAL PUMP COMPANY
PO BOX 922
STUTTGART, AR 72160

20PS MIXED-FLOW PUMP

IMPELLER — BRONZE

CLASS 'C' FIN.

880 RPM

BOWL — CAST IRON