


## 6MC 3450 RPM

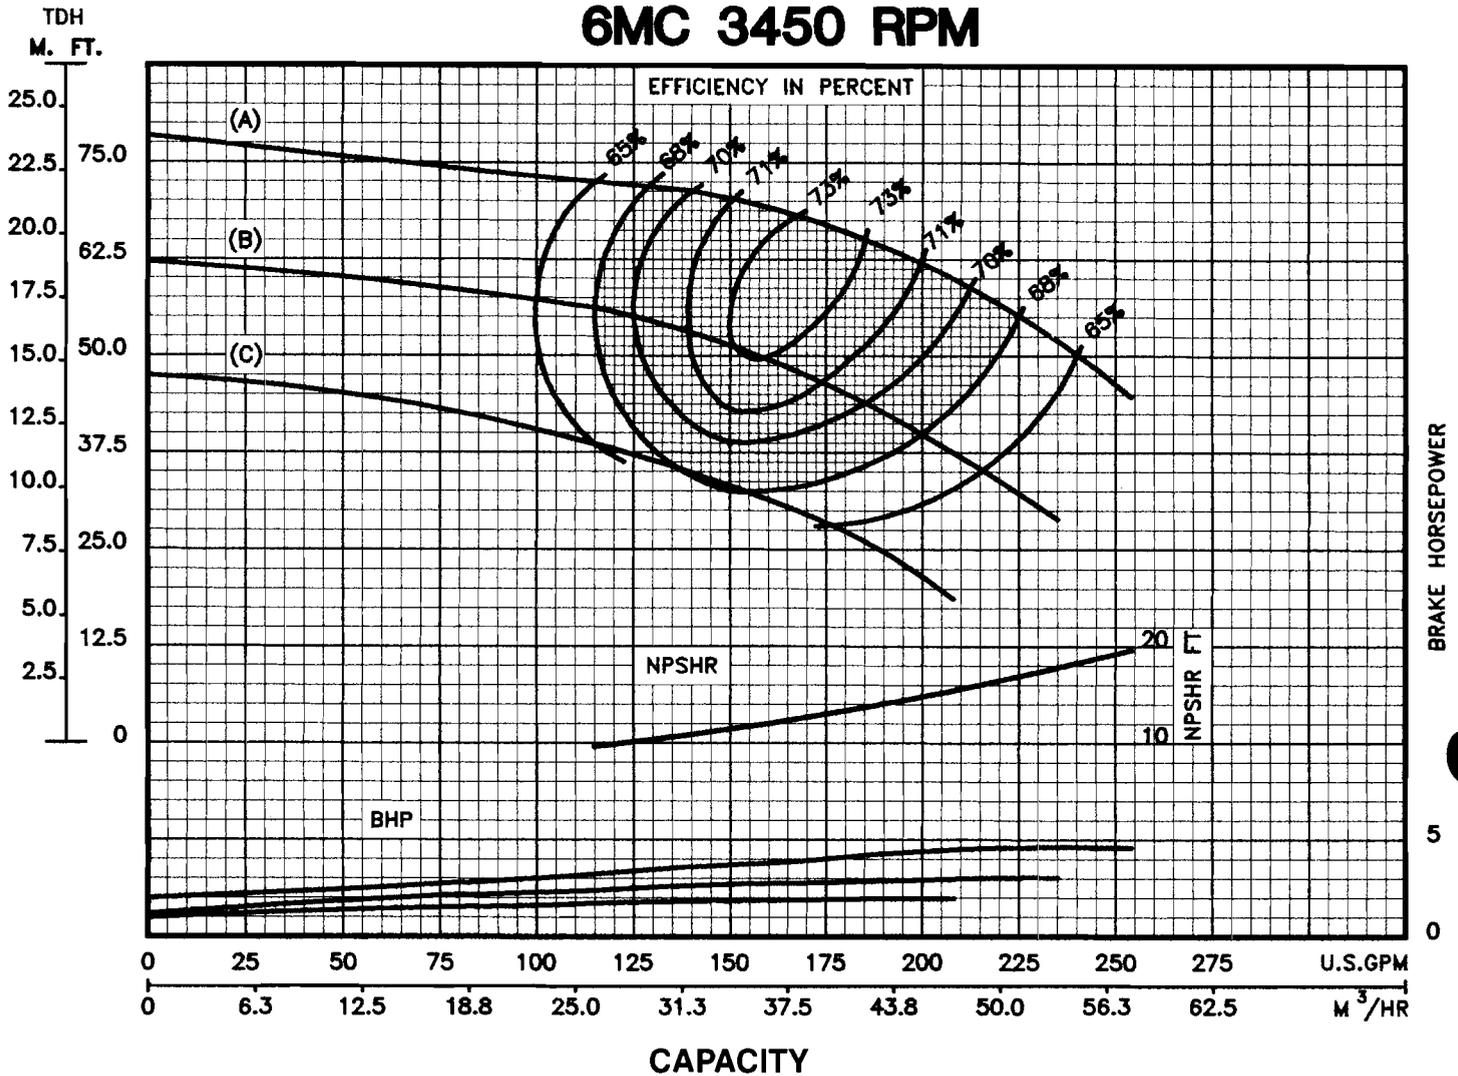

### IMPELLER DATA

Impeller Number:	6707	TRIM: (A) 4.688" X 27"
Material:	BRONZE	(B) 4.250" X 27"
Type:	CLOSED	(C) 3.750" X 27"
Thrust Factor:	K=2.24	
Eye Area:	3.20 sq. in.	
Weight:	2.15 lb.	Minimum submergence above eye of bottom impeller: 12 in.

### THREADED BOWL DATA

Bowl Number	6626 D.I.	
Bowl Dia.	5.563"	
Max. No. Stages	28	
One Stage Weight	75	lb
Add'l Stage Weight	15	lb
Std. Shaft Dia.	1.000 in	
Std. Lateral	0.500 in	
Discharge Size	4	in
Suction Size	4	in
Max. Sphere Size	0.188 in	
Max. Operation P.S.I.	650 (special)	

### EFFICIENCY CORRECTION

Number of Bowls	1	2	3	4
Change as follows	-4	-2	-1	0

Change in efficiency may affect both head and horsepower.

Performance based on pumping clear, fresh water at a temperature not over 85° F., and free of gas, air or abrasives, and with bowls properly adjusted and submerged.