PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 32 34	THRUST CONSTANT 9	PUMP SHAFT DIAM. $1\frac{11}{16}$
			IMPELLER PATTERN NO. 3212	WR² 0·914 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 12"

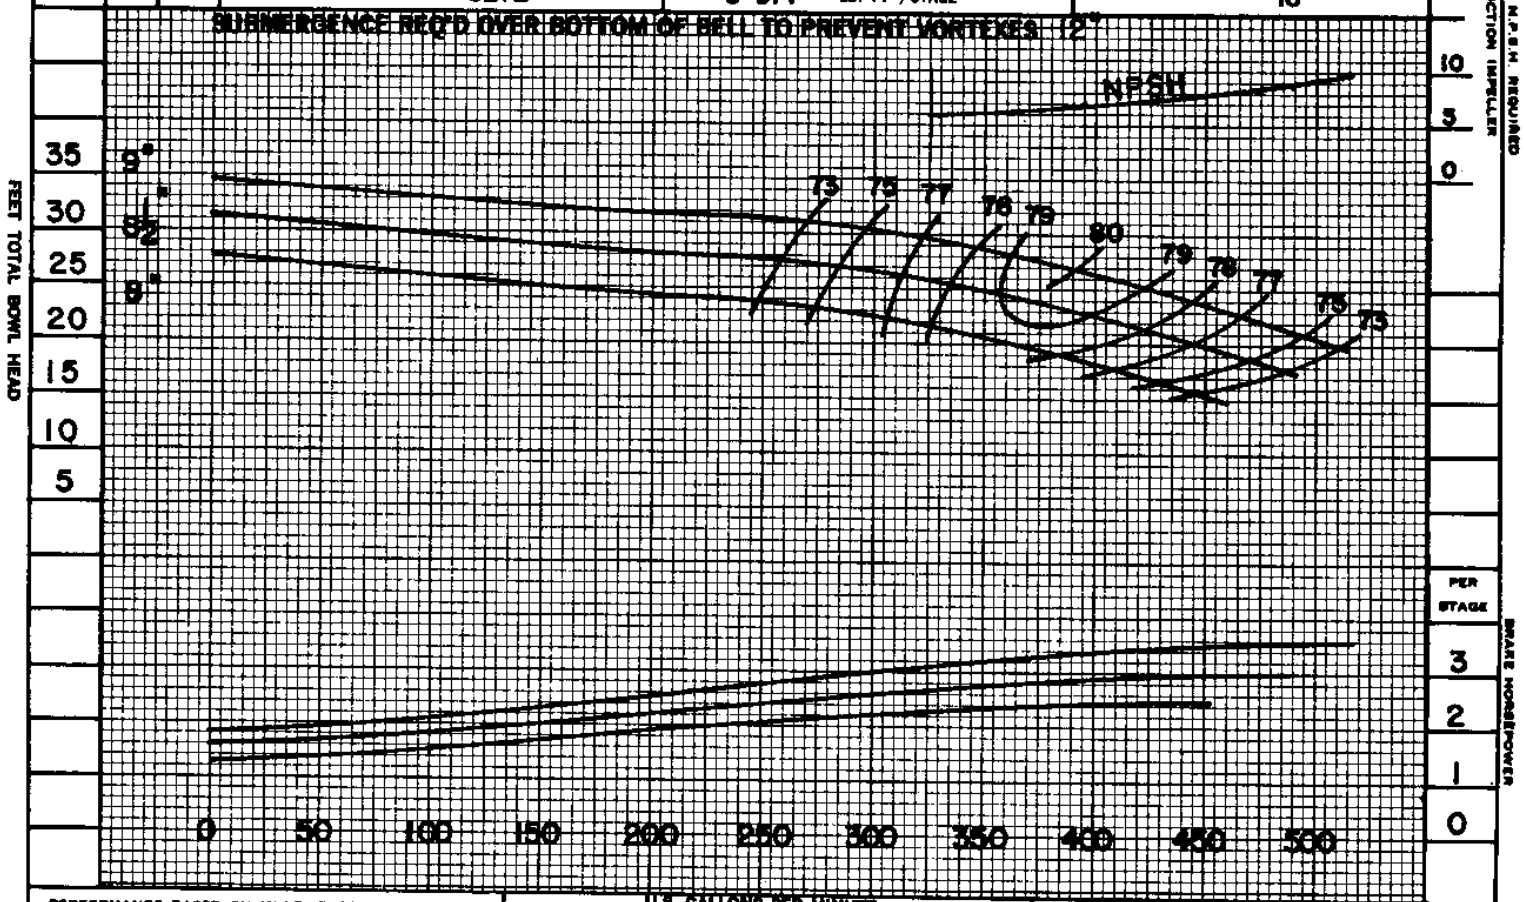

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0·95
FOR 2 STAGES MULTIPLY HD. & EFF. BY 0·98

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

12 AC TURBINE PUMP
IMPELLER — BRONZE

1170 RPM
BOWL — CAST IRON
VIT·EN·
CURVE SHEET NO.
EC-0558

JP-1017