PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 2827	THRUST CONSTANT 48·0	PUMP SHAFT DIAM. $1\frac{1}{2}$
			IMPELLER PATTERN NO. 2800	WR² 1·9 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 56"

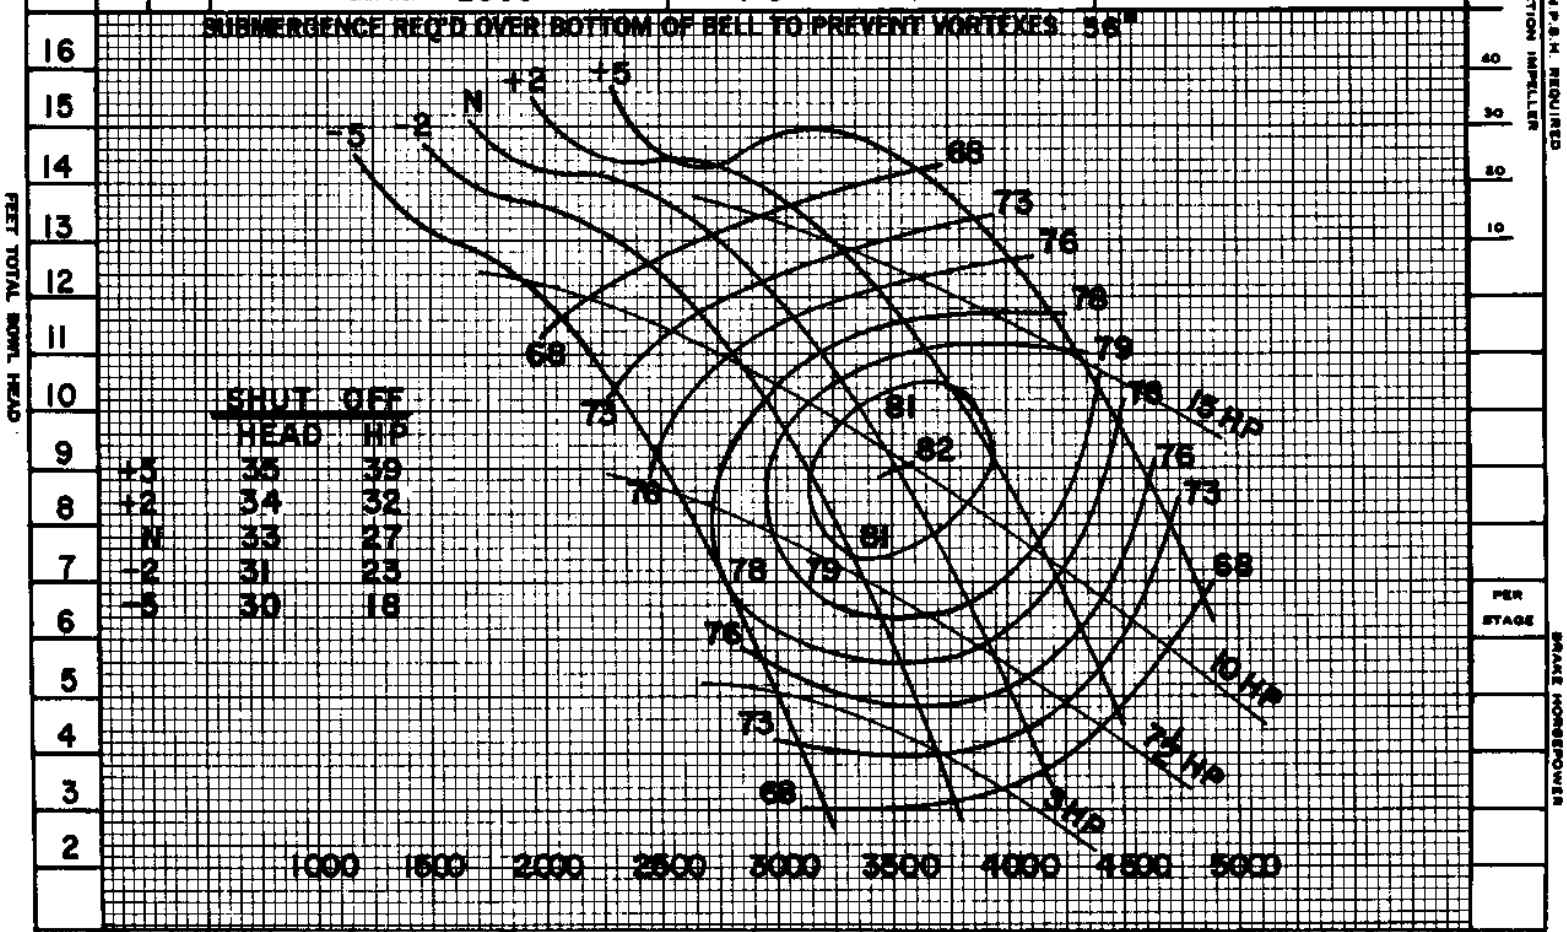

SHUT OFF	HEAD	HP
+5	35	39
+2	34	32
N	33	27
-2	31	23
-5	30	18

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1·0
FOR 2 STAGES MULTIPLY HD & EFF BY 1·0

DATE 9-26-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1900

12PO PROPELLER PUMP 1160 RPM
IMPELLER — BRONZE BOWL — CAST IRON

CURVE SHEET NO
EC-0856

JP-1017