PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 4318	THRUST CONSTANT 11·5	PUMP SHAFT DIAM. $1\frac{15}{16}$
			IMPELLER PATTERN NO. 4317	WR² 2·92 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 13"

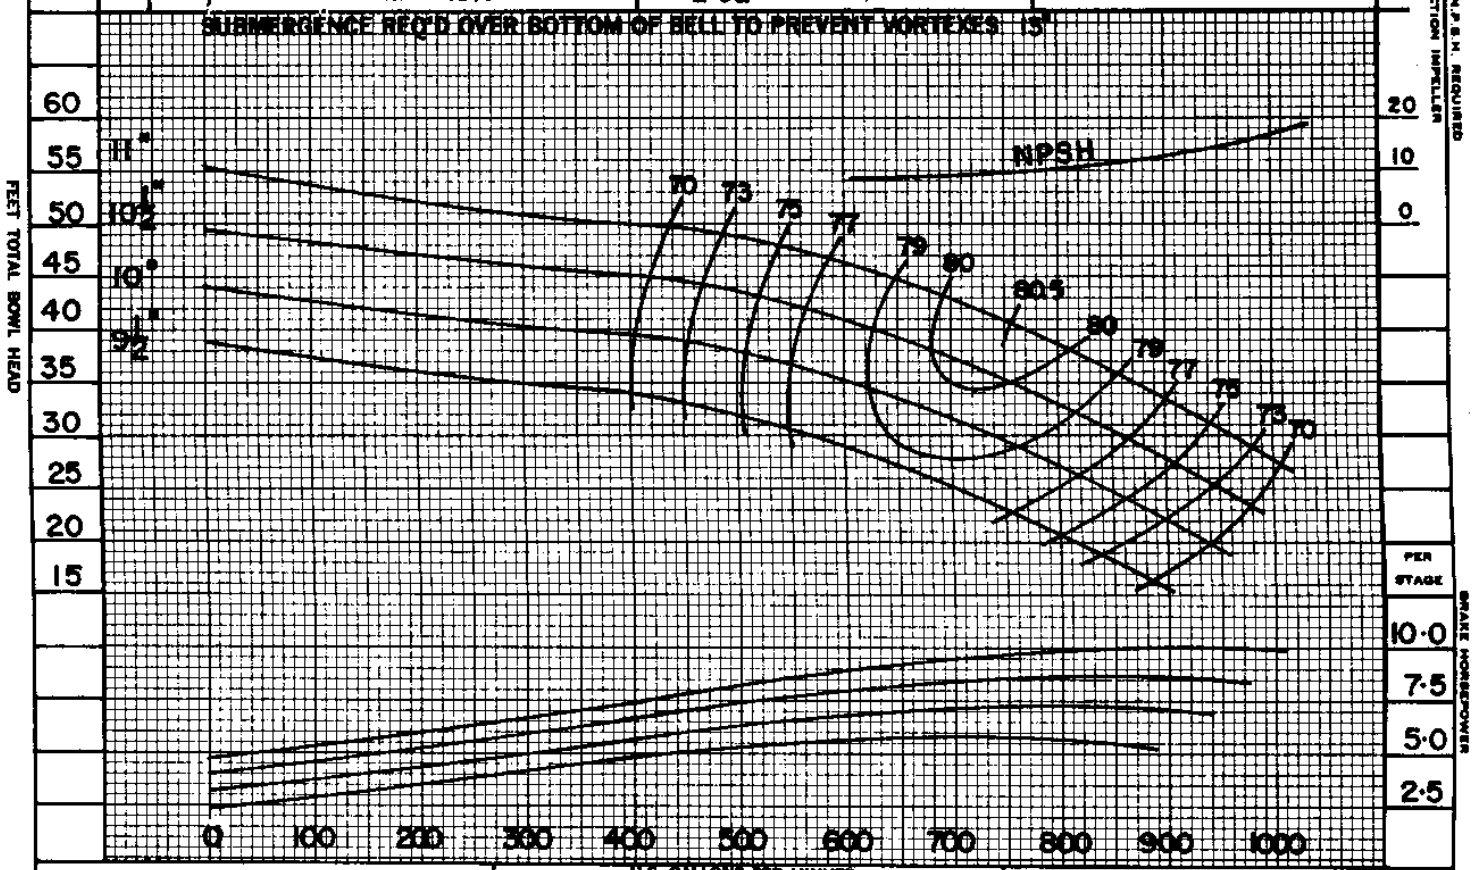

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1 0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0·95

FOR 2 STAGES MULTIPLY HD & EFF. BY 0·98

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

14AC TURBINE PUMP
IMPELLER — BRONZE

1175 RPM
BOWL — CAST IRON

VIT. EN
CURVE SHEET NO
EC-0607

JP-1017