PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 35683	THRUST CONSTANT 86.0	PUMP SHAFT DIAM. $1\frac{11}{16}$
			IMPELLER PATTERN NO. 2887	WR^2 5.8 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 48 INCHES

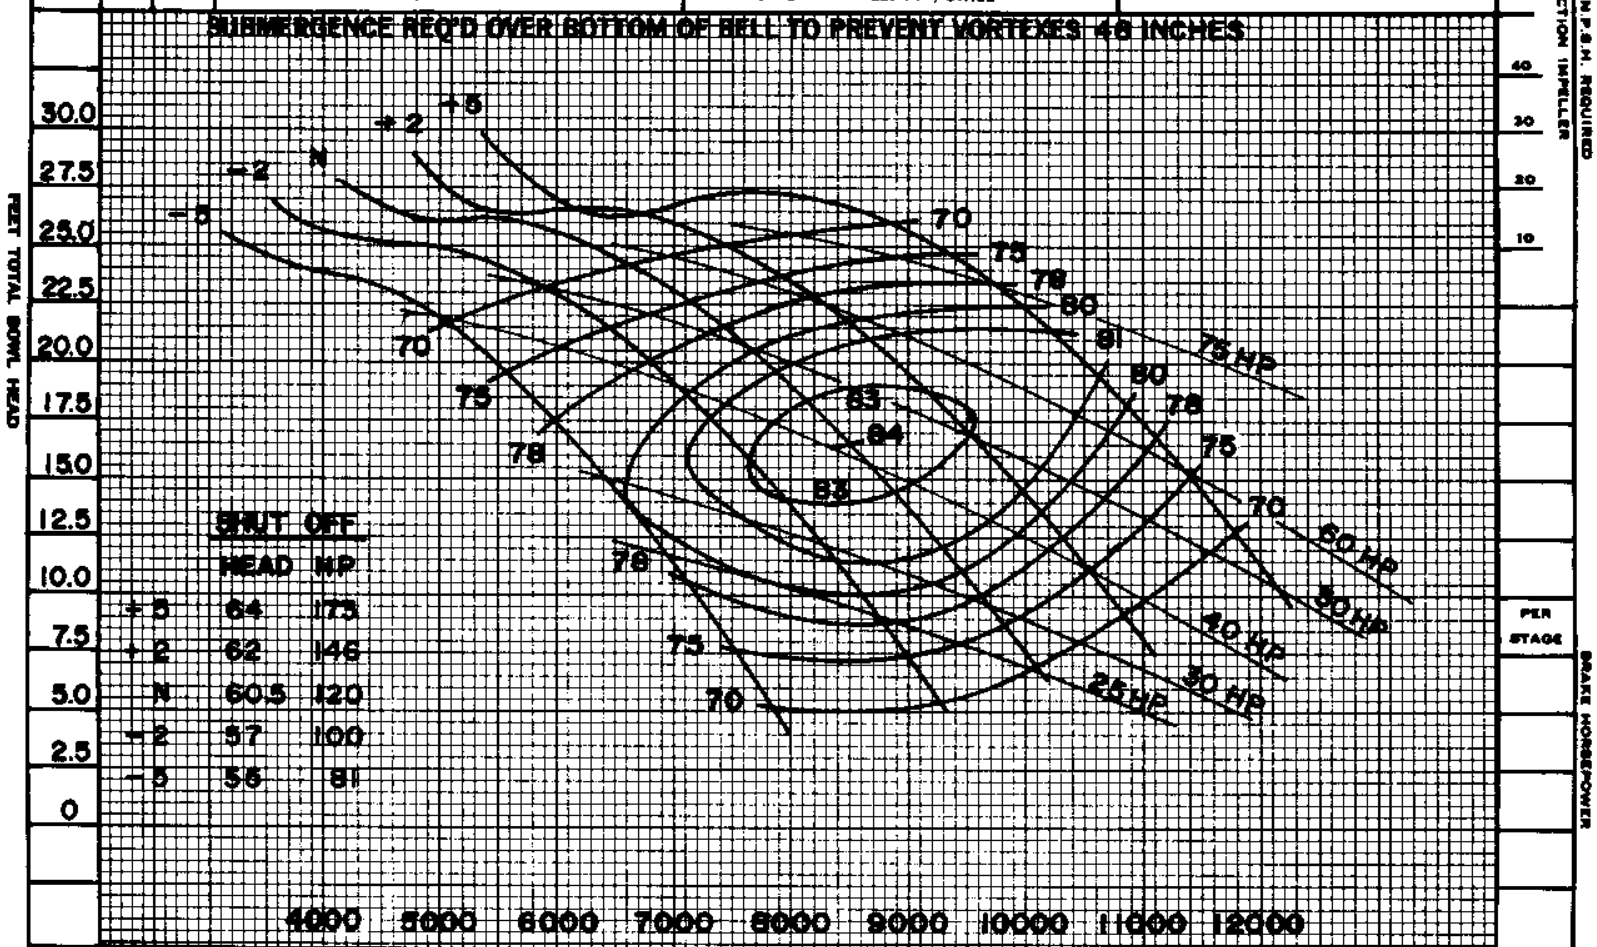

SHUT OFF		
	HEAD	HP
+5	64	173
+2	62	146
N	60.5	120
-2	57	100
-5	55	81

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF BY 1.0

DATE 4-18-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

16 PO PROPELLER PUMP 1180 R.P.M.

IMPELLER — BRONZE BOWL — CAST IRON

CURVE SHEET NO. EC-0728

JP-1017