PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 27930	THRUST CONSTANT 41	PUMP SHAFT DIAM. INCHES
		IMPELLER PATTERN NO. 3283	WR² 22.2 LB. FT²/STAGE	2-7/16

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 43"

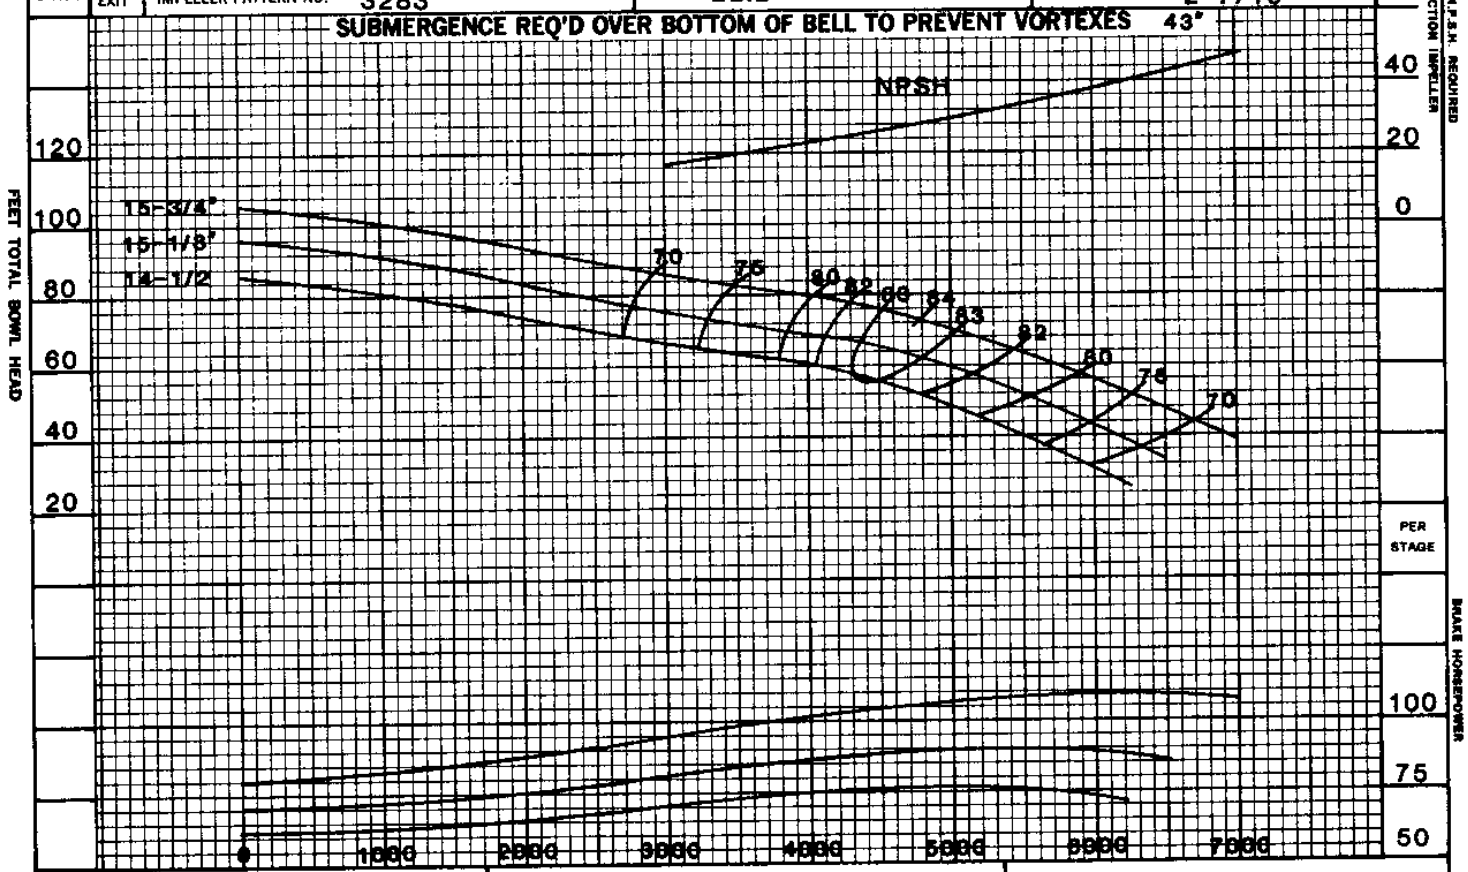

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .98

FOR 3 STAGES MULTIPLY HD. & EFF. BY 1.00

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

20EC TURBINE PUMP 1180 RPM

IMPELLER – BRONZE

BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2821

JP-341A