PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 4378	THRUST CONSTANT 9.6	PUMP SHAFT DIAM. $1\frac{1}{2}$
			IMPELLER PATTERN NO. 4377	WR^2 .25 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 10"

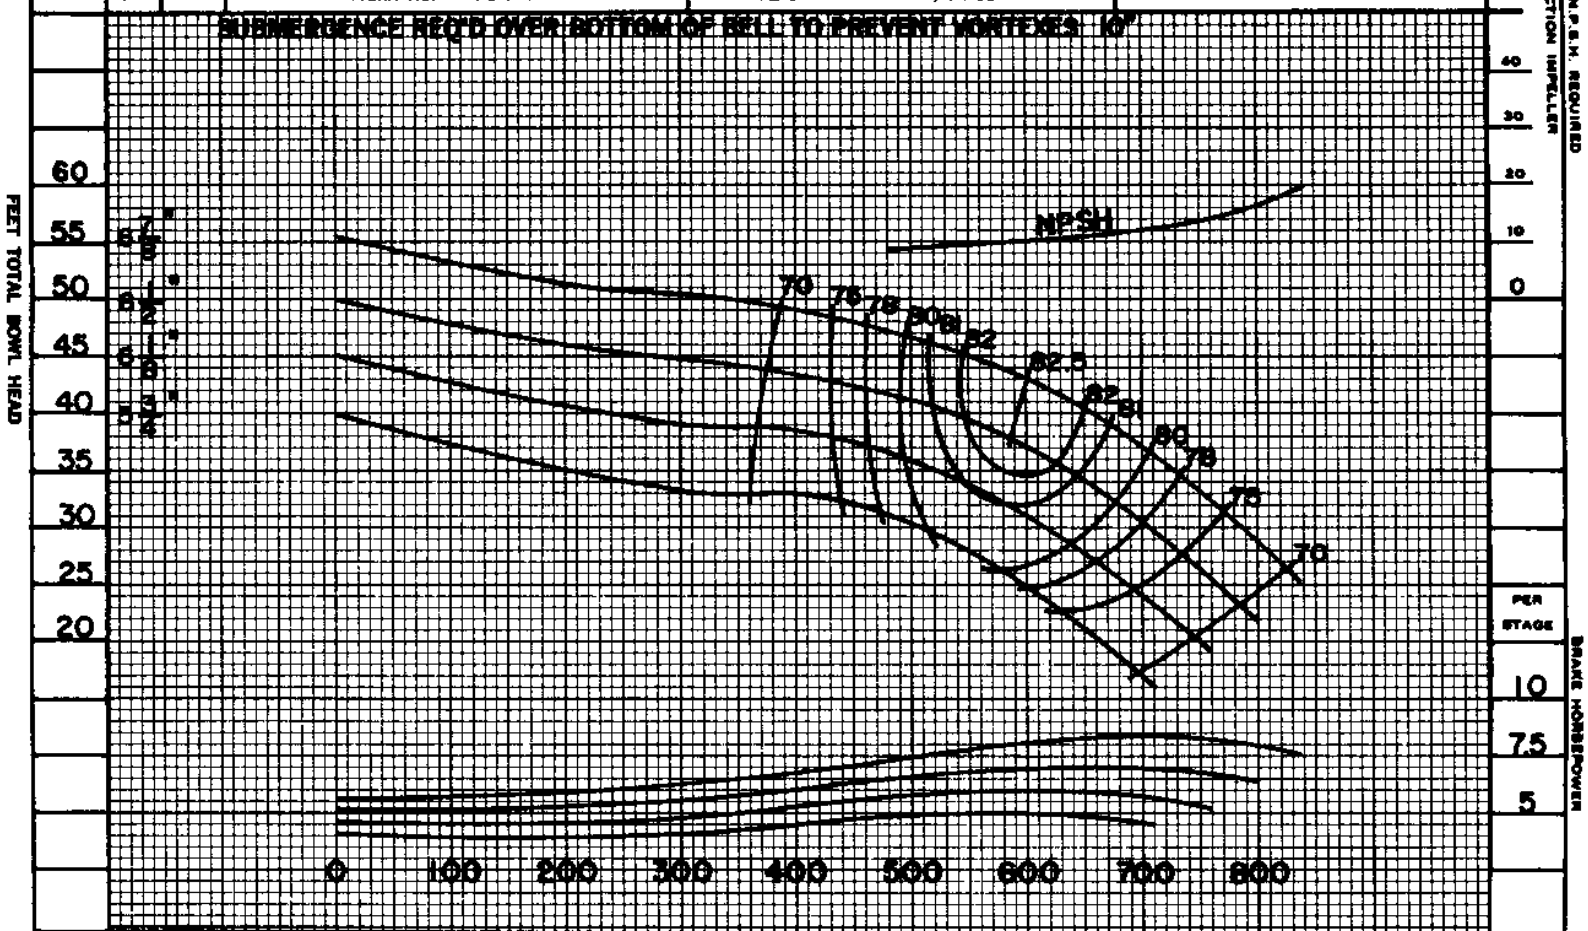

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 2 STAGES MULTIPLY HD & EFF BY .98

DATE 10-26-72

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

10 CS TURBINE PUMP — 1760 R.P.M.

IMPELLER — BRONZE
BOWL — CAST IRON
VIT. EN.

CURVE SHEET NO. EC-0543

JP-1017