PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 3234	THRUST CONSTANT 9	PUMP SHAFT DIAM. $1\frac{11}{16}$
			IMPELLER PATTERN NO. 3212	WR^2 0·914 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 12"

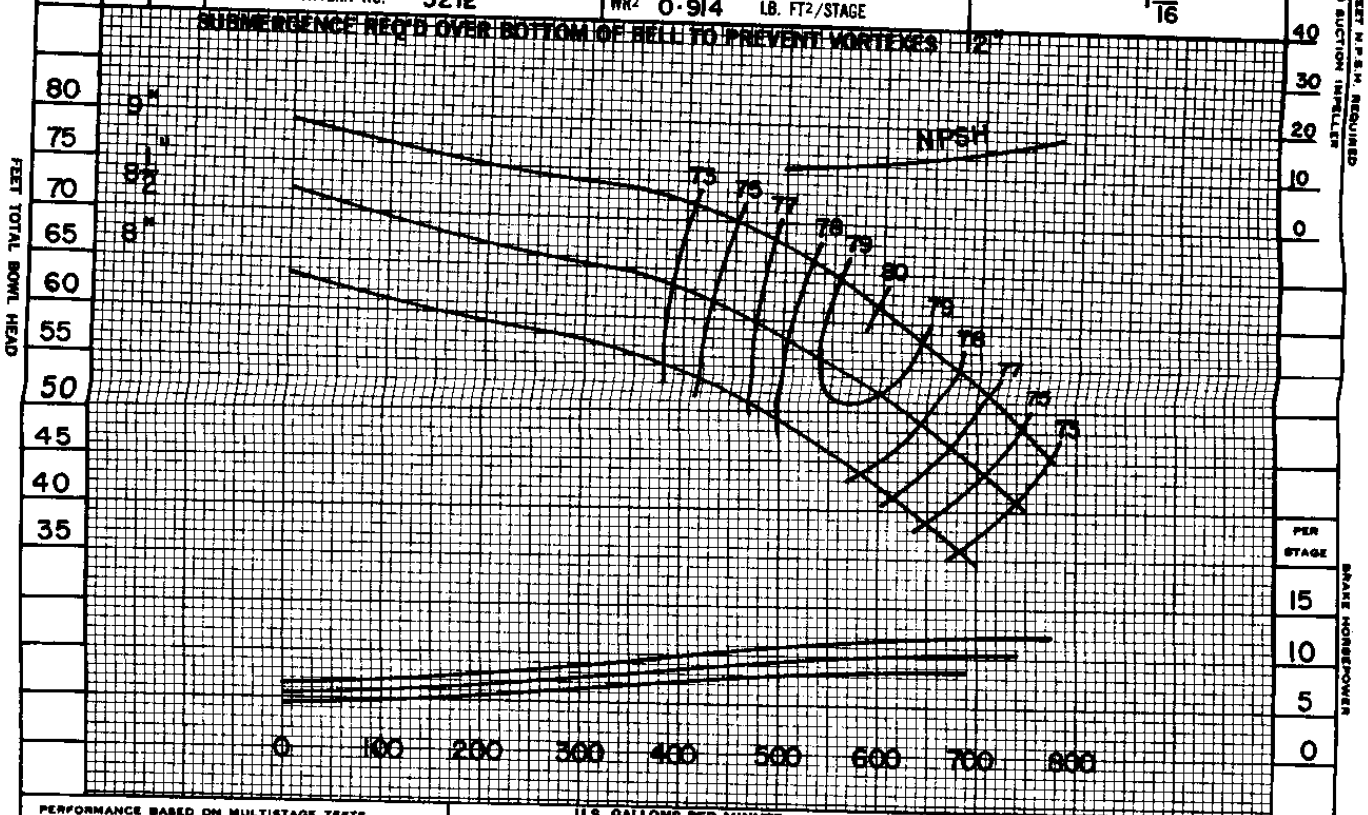

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0·95

FOR 2 STAGES MULTIPLY HD. & EFF. BY 0·98

DATE 11-2-72

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

12 AC TURBINE PUMP
IMPELLER — BRONZE

1770 RPM
BOWL — CAST IRON
VIT. EN.

CURVE SHEET NO
EC-0557

JP-1017