PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 1516	THRUST CONSTANT 11.6	PUMP SHAFT DIAM. $1\frac{11}{16}$
			IMPELLER PATTERN NO. 1460	WR² .854 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 18"

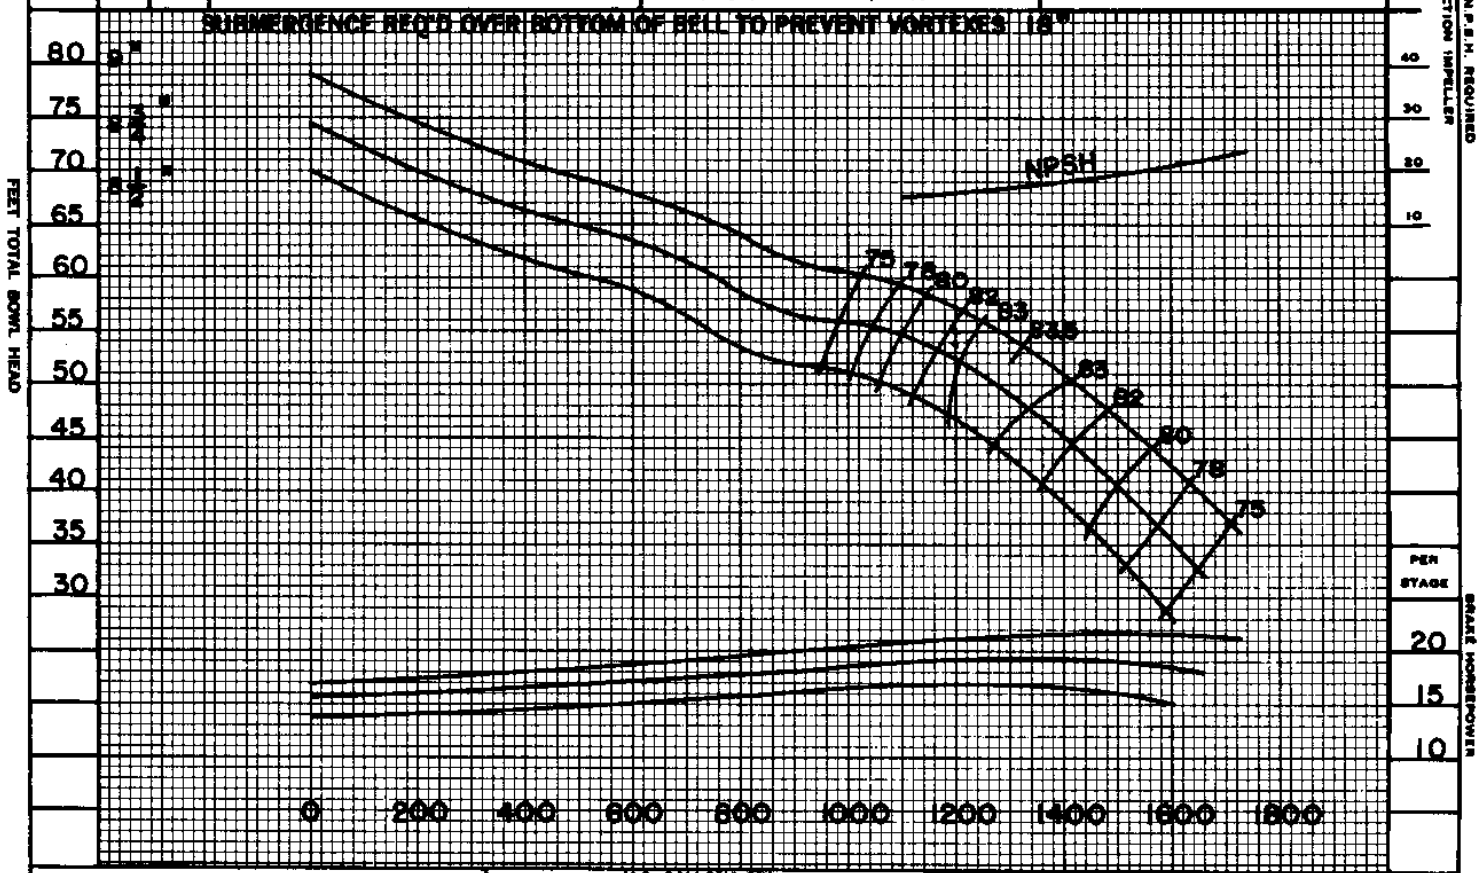

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 2 STAGES MULTIPLY HD. & EFF. BY .98
DATE 11-30-72

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

12 DC TURBINE PUMP
IMPELLER — BRONZE
1770 R.P.M.
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO
EC - 0632

JP-1017