PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 39192	THRUST CONSTANT 10·0	PUMP SHAFT DIAM. $1\frac{11}{16}$
			IMPELLER PATTERN NO. 35950	WR² 2·08 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 22"

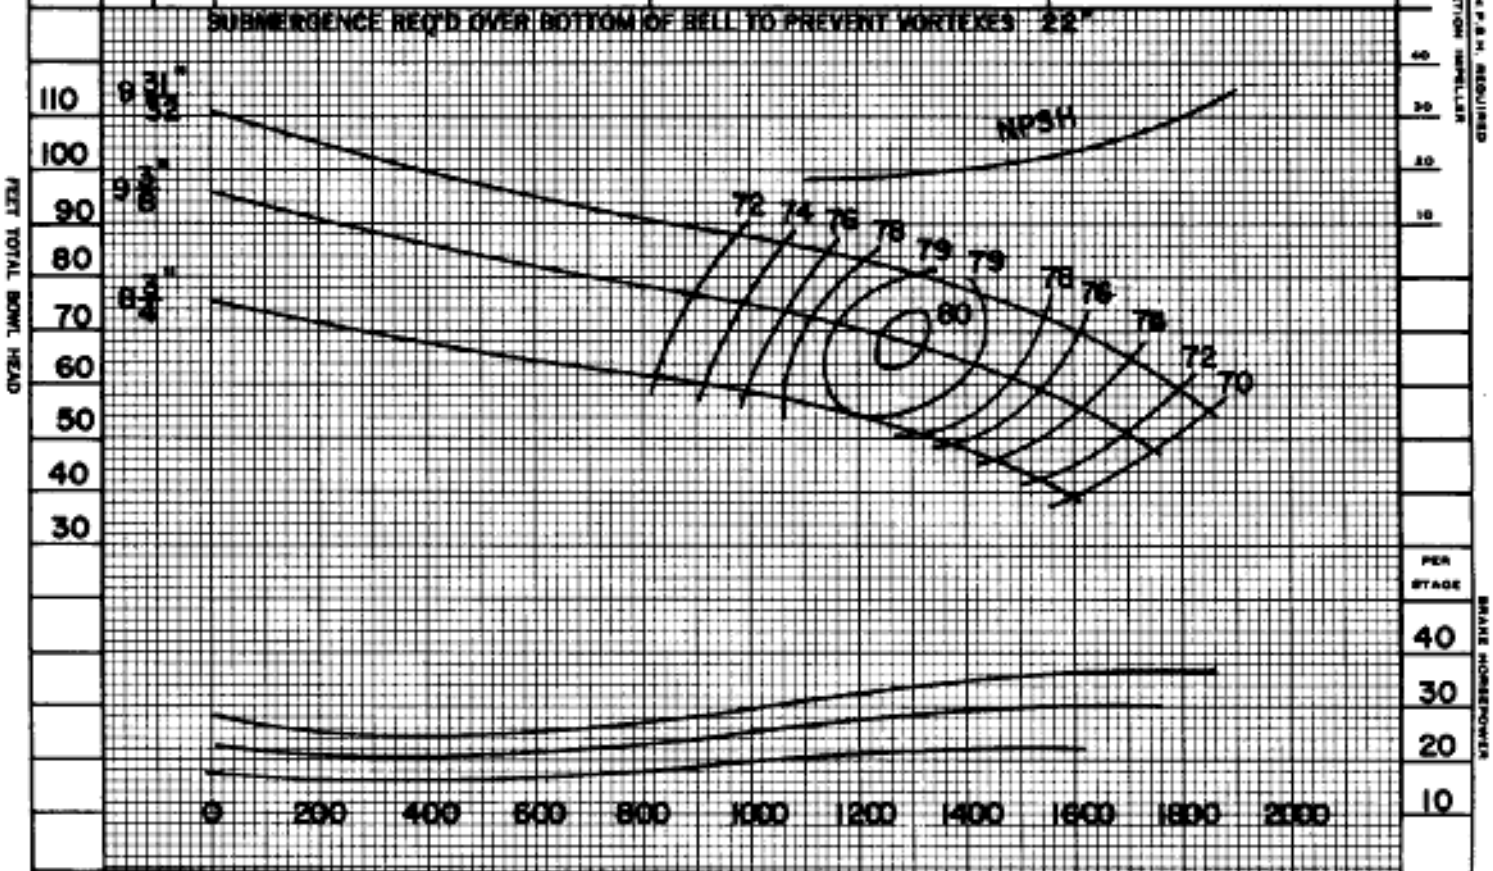

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY ·98

FOR 2 STAGES MULTIPLY HD. & EFF. BY ·99

DATE 4-4-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

12 GHC TURBINE PUMP

IMPELLER — BRONZE

1770 R.P.M.

BOWL — CAST IRON

VIT. EN.

CURVE SHEET NO. EC-0706

JP-1017