PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 3855	THRUST CONSTANT 2·0	PUMP SHAFT DIAM. 3/4
			IMPELLER PATTERN NO. 3801	WR^2 ·020 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 5"

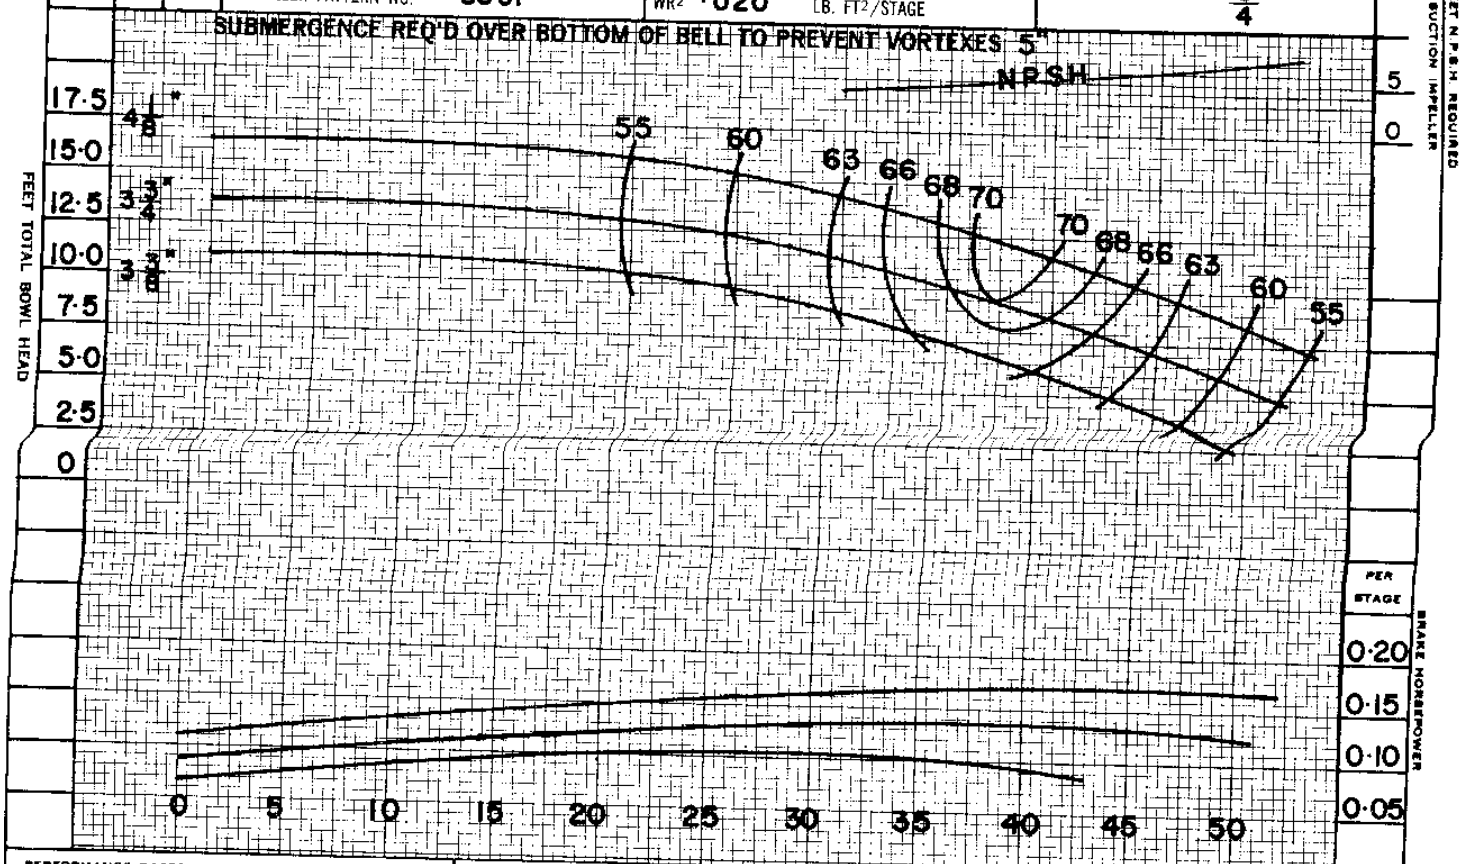

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1 0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY ·95

FOR 5 STAGES MULTIPLY HD & EFF BY ·99

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

6AS TURBINE PUMP
IMPELLER — BRONZE

1760 RPM
BOWL — CAST IRON

VIT·EN
CURVE SHEET NO
EC-0797

JP-1017