PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 33682	THRUST CONSTANT 2·9	PUMP SHAFT DIAM. $1\frac{3}{16}$"
			IMPELLER PATTERN NO. 33676	WR² 0·19 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 7"

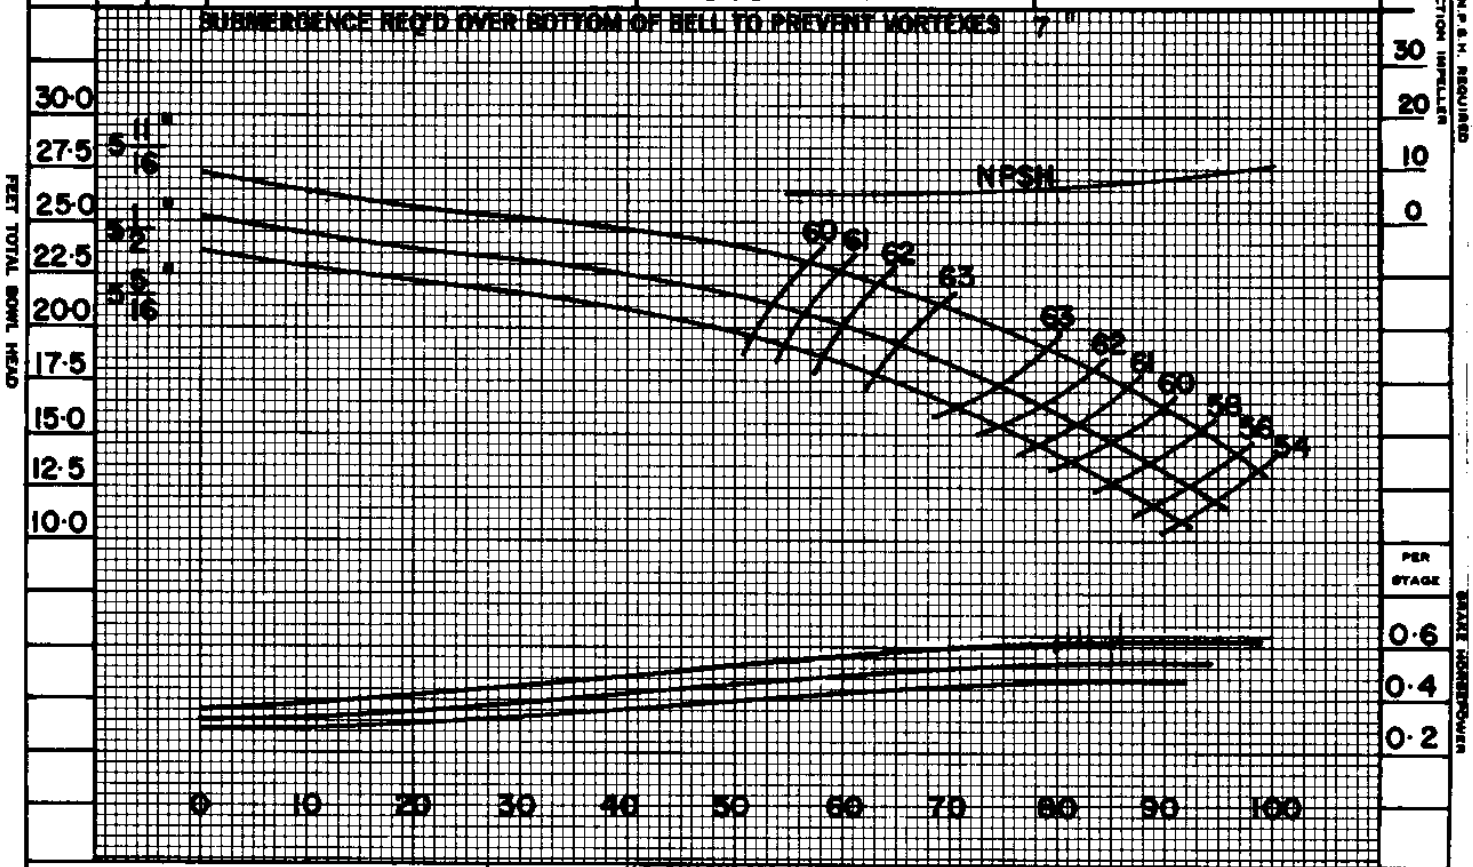

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 0·95
FOR 2 STAGES MULTIPLY HD. & EFF. BY 0·98

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

7AWC TURBINE PUMP
IMPELLER — BRONZE
1760 R.P.M.
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO.
EC-0365

JP-1017