PER STAGE	IMP. DIA.	IMP. EXIT

IMPELLER PART NO. 17733
IMPELLER PATTERN NO. 6609

THRUST CONSTANT 3.5
WR² .068 LB. FT²/STAGE

PUMP SHAFT DIAM. $1\frac{3}{16}$

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 8"

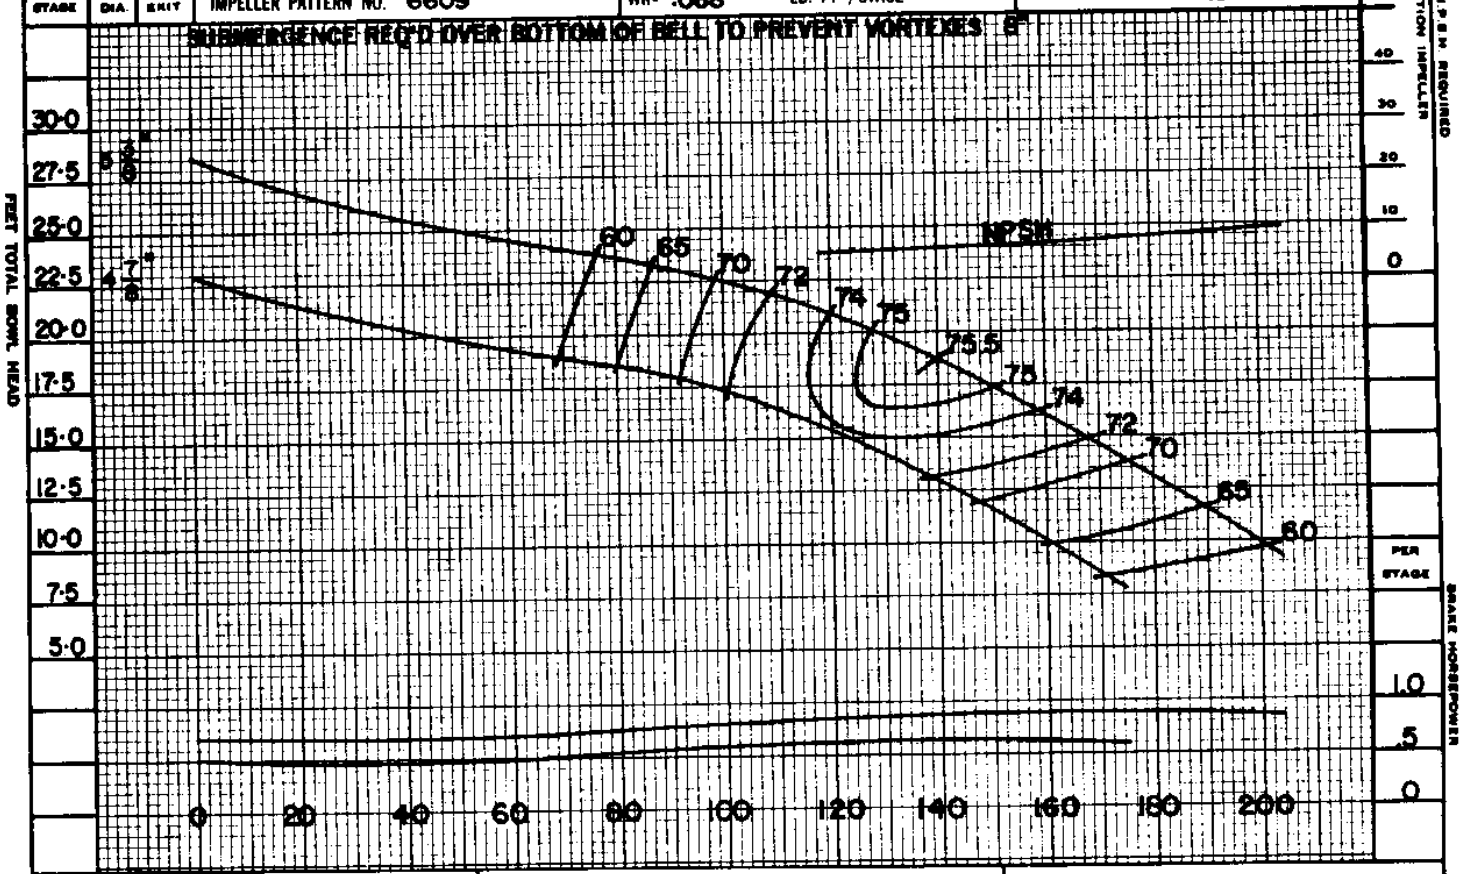

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP GR 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF BY .95
FOR 2 STAGES MULTIPLY HD & EFF BY .98
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

7 BC TURBINE PUMP
IMPELLER — BRONZE
1760 RPM
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO
EC-0577

JP-1017