PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 2770 IMPELLER PATTERN NO. 2640	THRUST CONSTANT 3.8 WR² .068 LB. FT²/STAGE	PUMP SHAFT DIAM. $1\frac{3}{16}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 8"

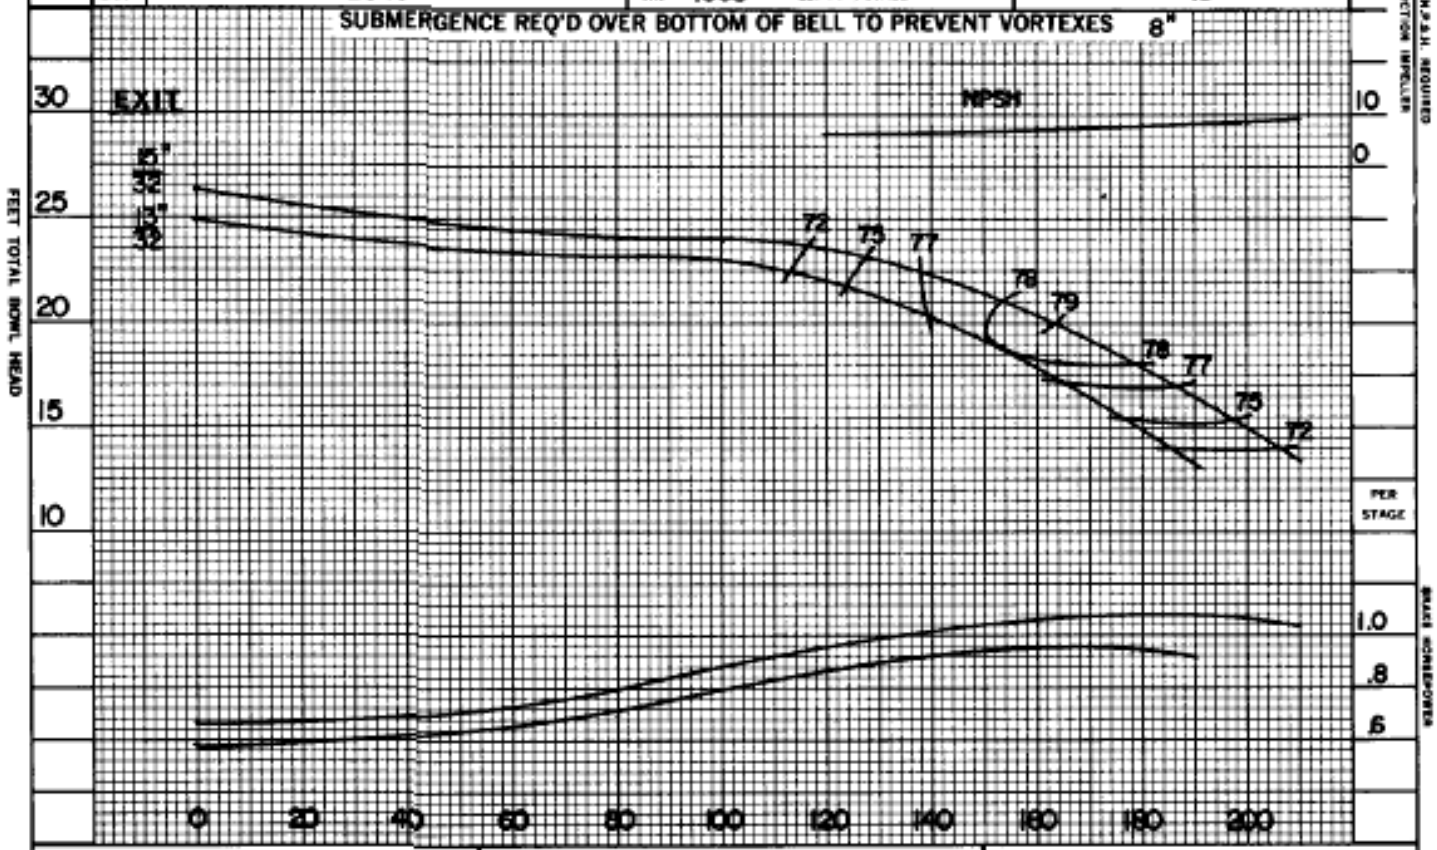

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 2 STAGES MULTIPLY HD. & EFF. BY .98
DATE 2-4-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

7 CS TURBINE PUMP 1760 RPM
IMPELLER – BRONZE
BOWL – CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2506

JP 1134