PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 48791 IMPELLER PATTERN NO. 48260	THRUST CONSTANT 6 WR² .05 LB. FT²/STAGE	PUMP SHAFT DIAM. 1 3/16" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 8"

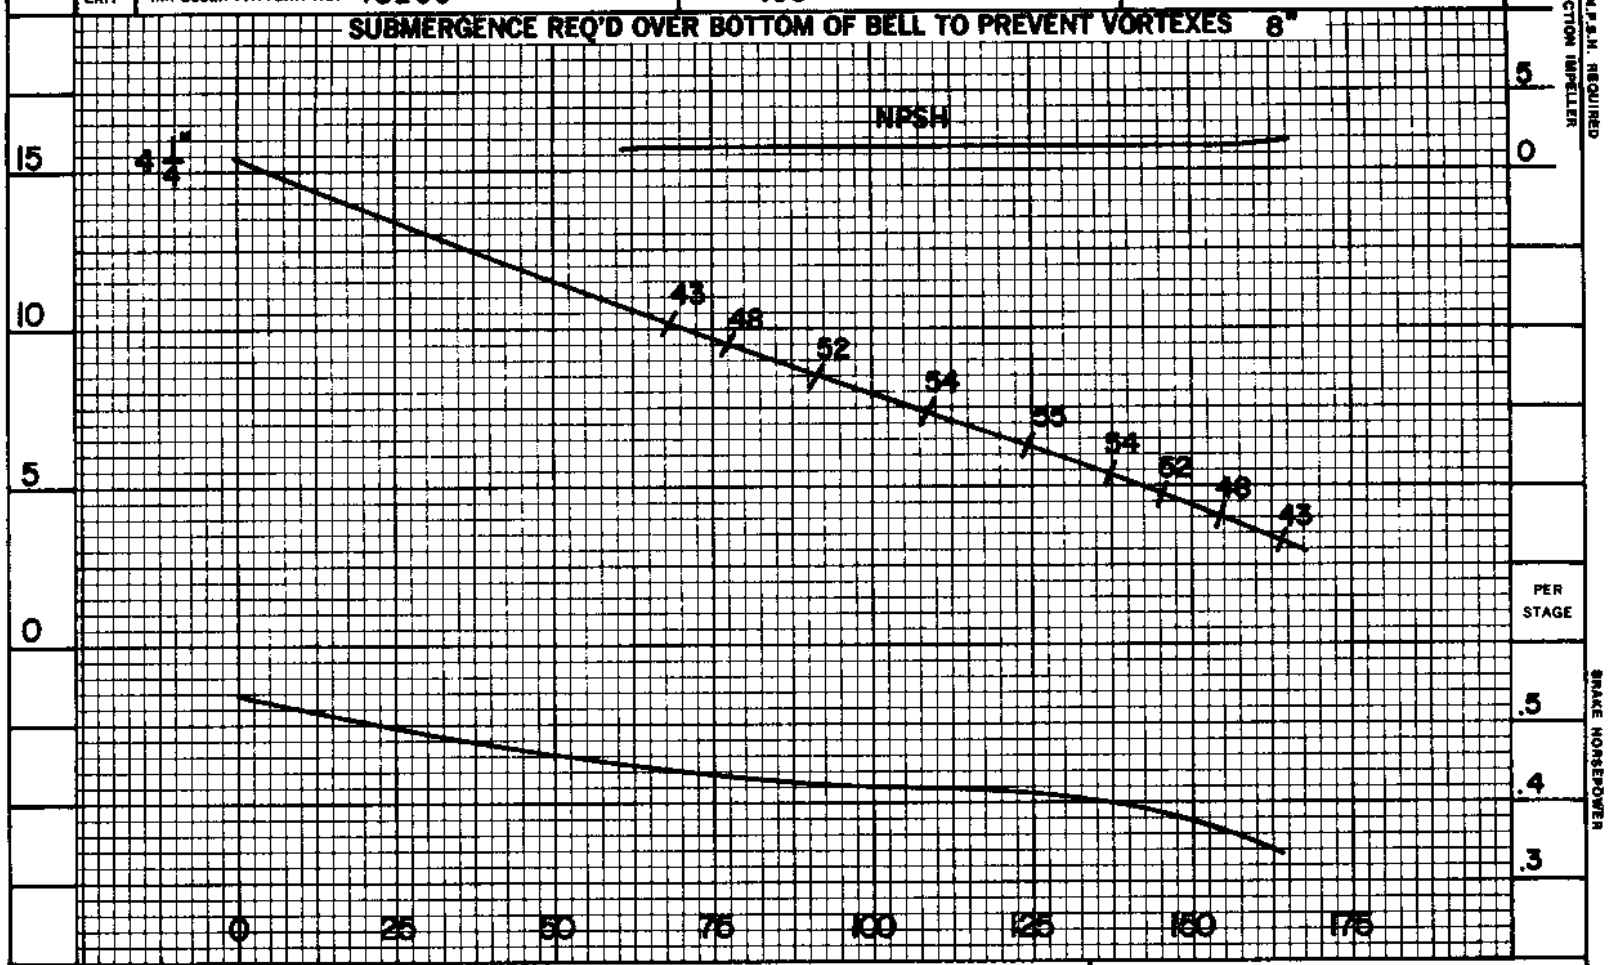

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR — STAGES MULTIPLY HD. & EFF. BY —
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

7 QLC TURBINE PUMP 1770 RPM
IMPELLER — STAINLESS STL.
BOWL — CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2571

JP-341A