PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 5638 / IMPELLER PATTERN NO. 5627	THRUST CONSTANT 5.4 / WR^2 0.282 LB. FT^2/STAGE	PUMP SHAFT DIAM. $1\frac{3}{16}$

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 9"

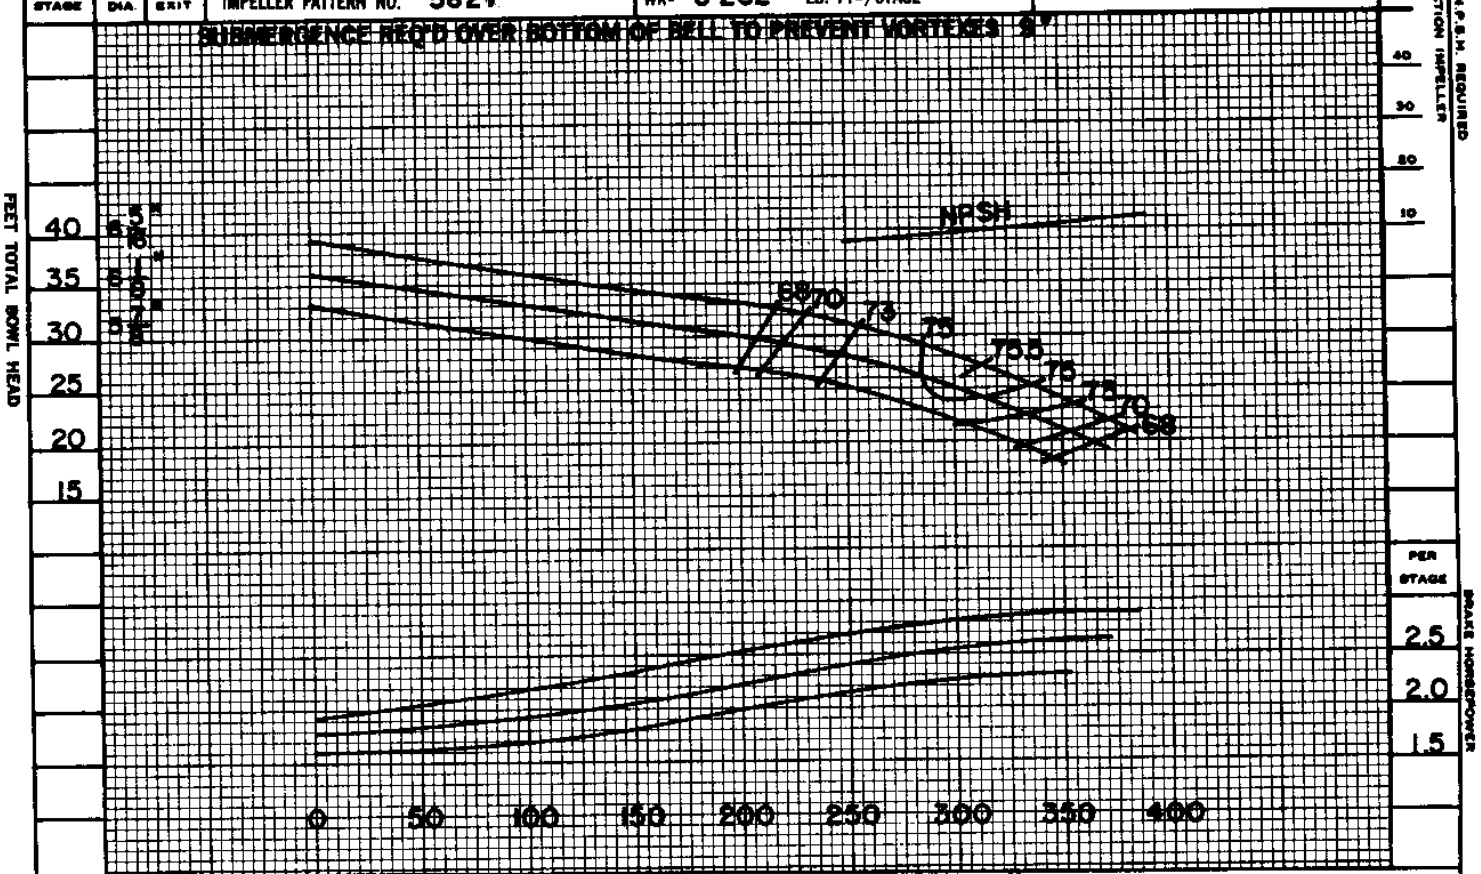

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 3 STAGES MULTIPLY HD. & EFF. BY .98

DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

8 CC TURBINE PUMP — 1760 R.P.M.

IMPELLER — BRONZE

BOWL — CAST IRON

VIT. EN.

CURVE SHEET NO. EC-0603

JP-1017