PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 1659	THRUST CONSTANT 6.3	PUMP SHAFT DIAM. $1\frac{3}{16}$" INCHES
		IMPELLER PATTERN NO. 1681	WR² .124 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 9"

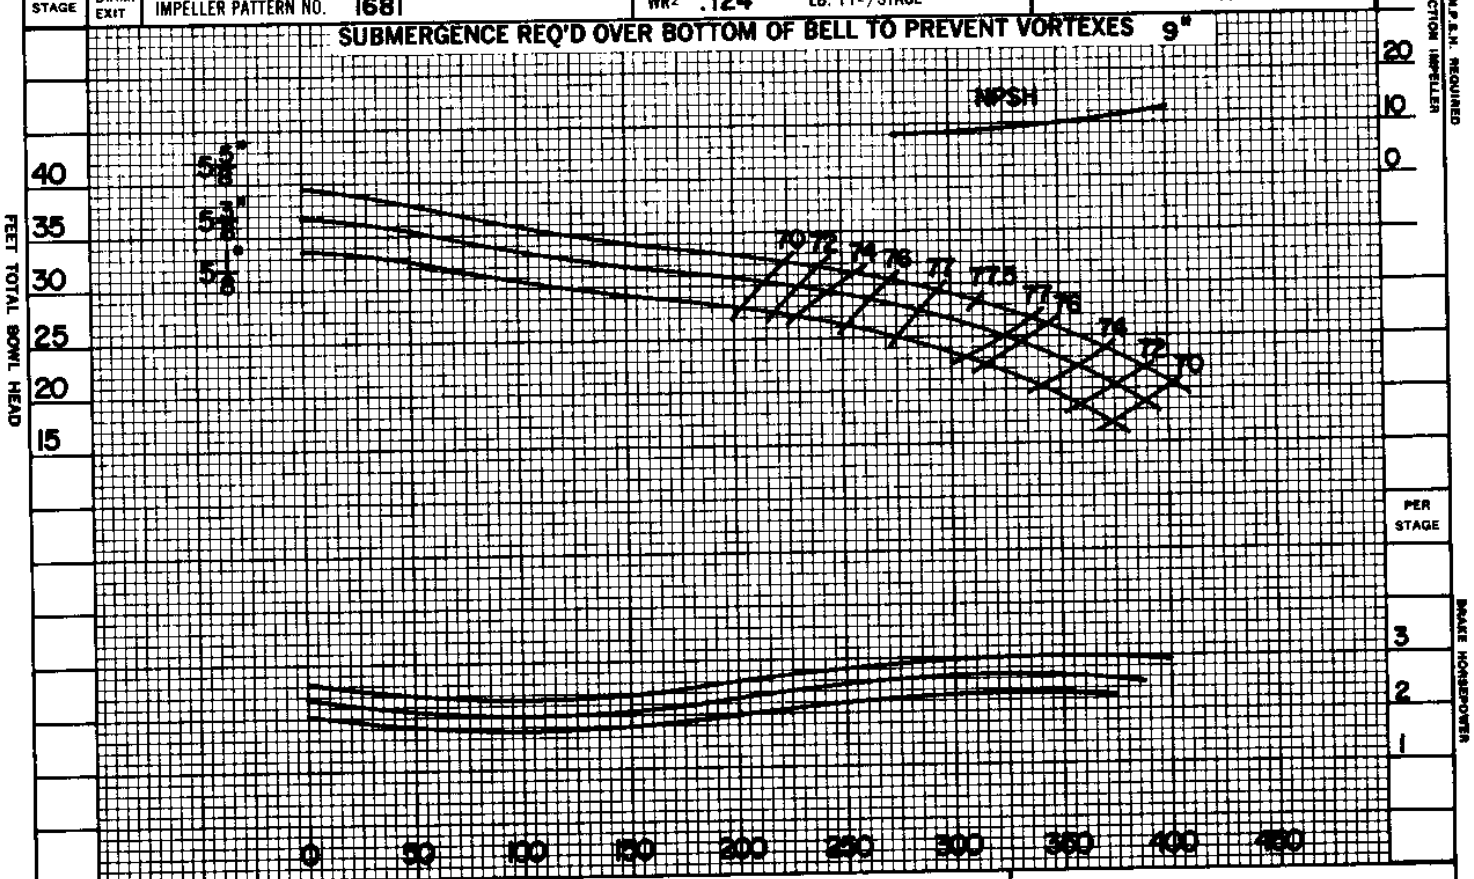

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 2 STAGES MULTIPLY HD. & EFF. BY .98
DATE 2-6-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

8 CS TURBINE PUMP 1760 RPM
IMPELLER — BRONZE
BOWL — CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2508

JP 1124