PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 44276-A IMPELLER PATTERN NO. 43468-D	THRUST CONSTANT 3.1 WR² .31 LB. FT²/STAGE	PUMP SHAFT DIAM. 1½" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 10"

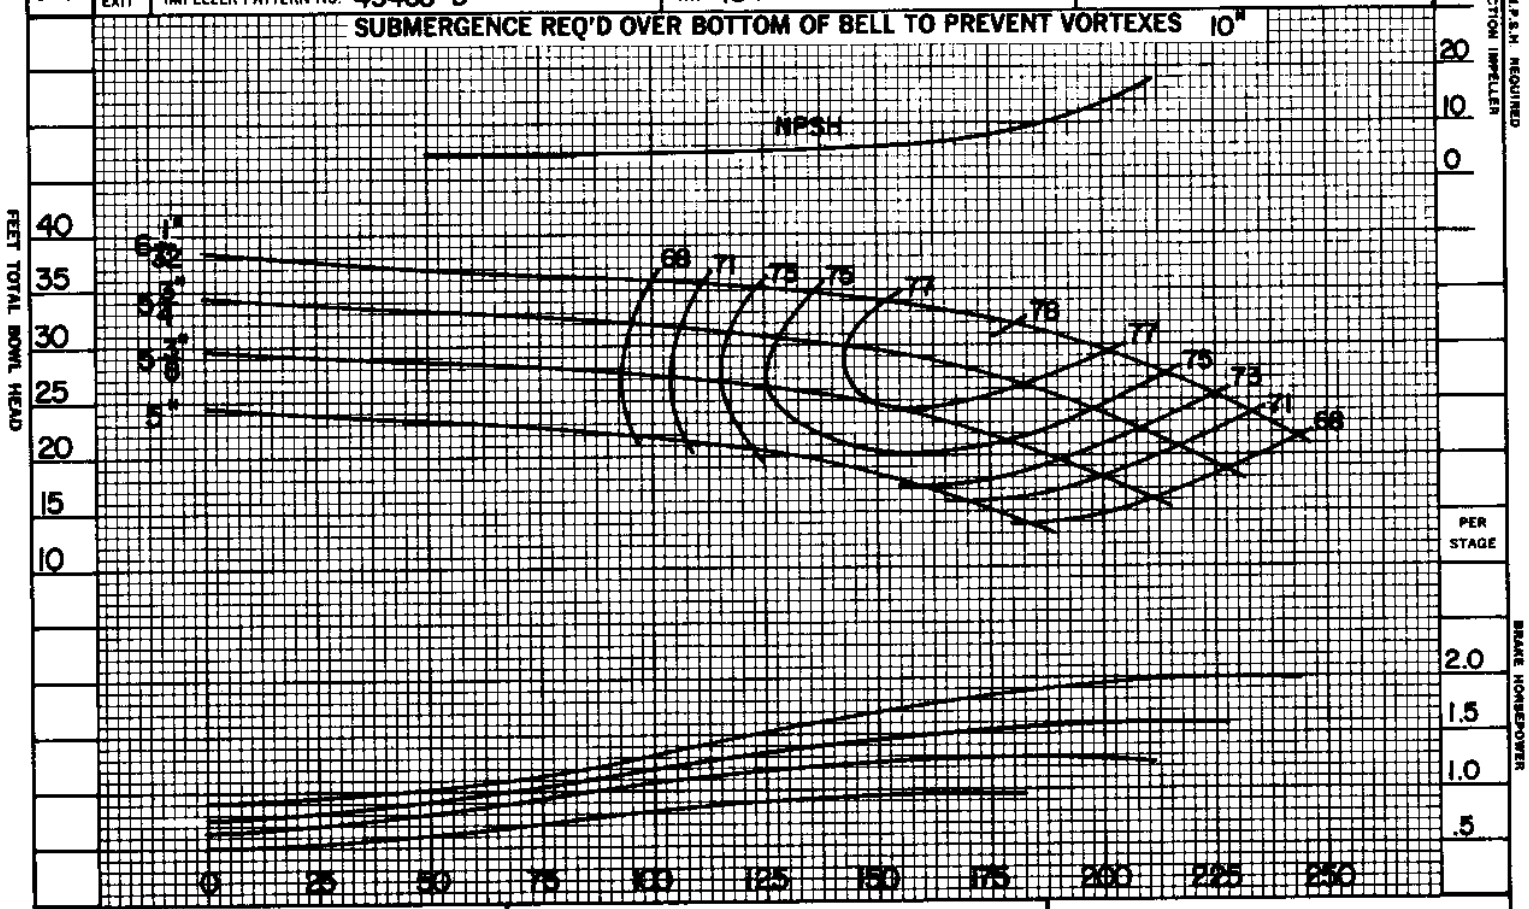

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 5 STAGES MULTIPLY HD. & EFF. BY .99
DATE 11-18-86

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

8 DHC
IMPELLER – BRONZE

1770 RPM
BOWL – CAST IRON
VIT. ENAMELED

CURVE SHEET NO.
EC-2647

JP 1124