PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 20844	THRUST CONSTANT 6.8	PUMP SHAFT DIAM. $1\frac{3}{16}$" INCHES
		IMPELLER PATTERN NO. 20843	WR² .317 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 10"

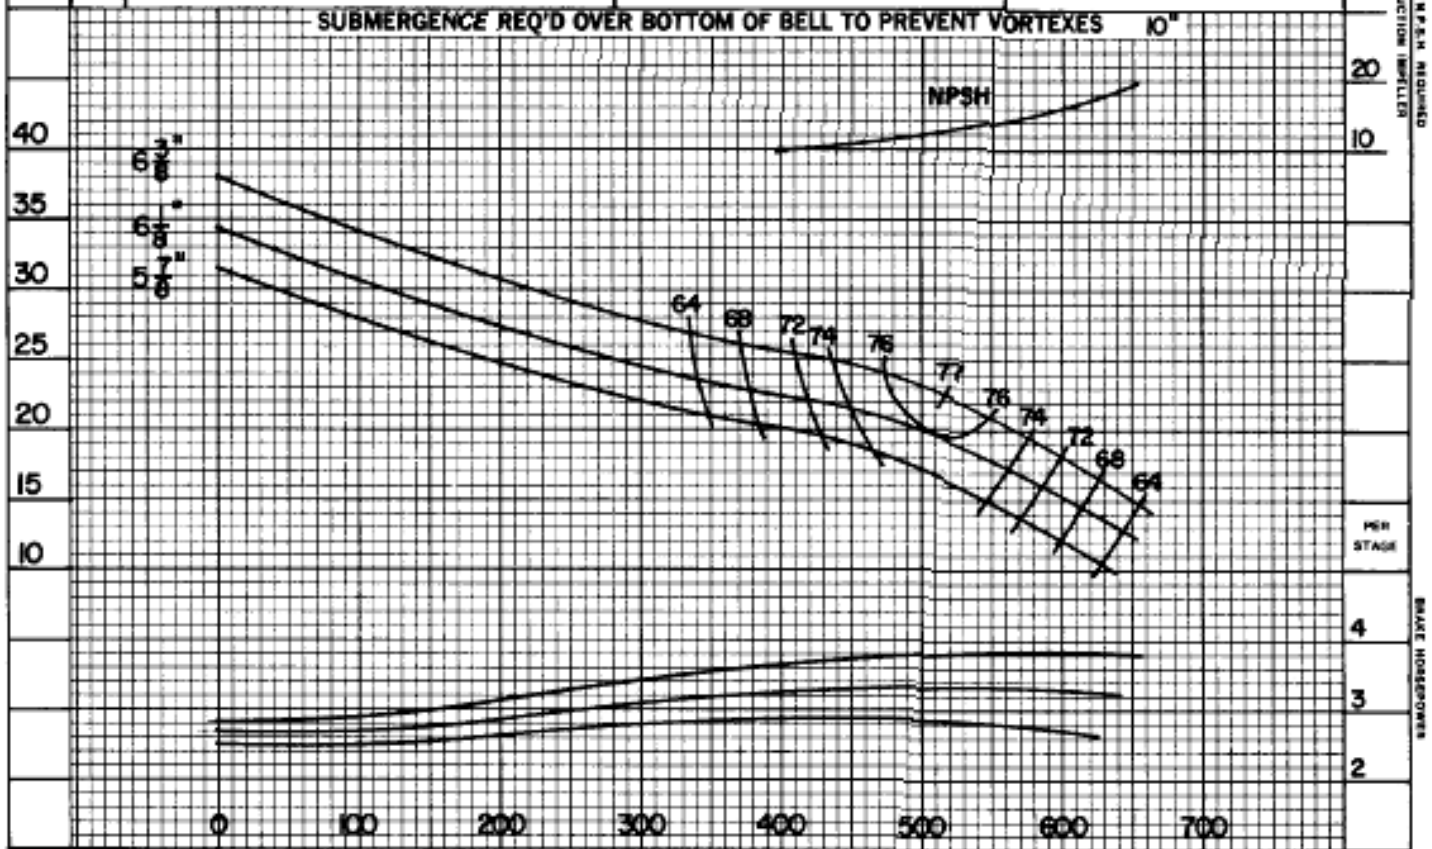

U.S. GALLONS PER MINUTE

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 3 STAGES MULTIPLY HD. & EFF. BY .98
DATE 2-6-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

8 EC TURBINE PUMP 1760 R.P.M.
IMPELLER – BRONZE
BOWL – CAST IRON VIT. ENAMELED
CURVE SHEET NO. EC-2509

JP-341A