PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 16623	THRUST CONSTANT 14	PUMP SHAFT DIAM. 1"
			IMPELLER PATTERN NO. 16025	WR^2 0.32 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 21 INCHES

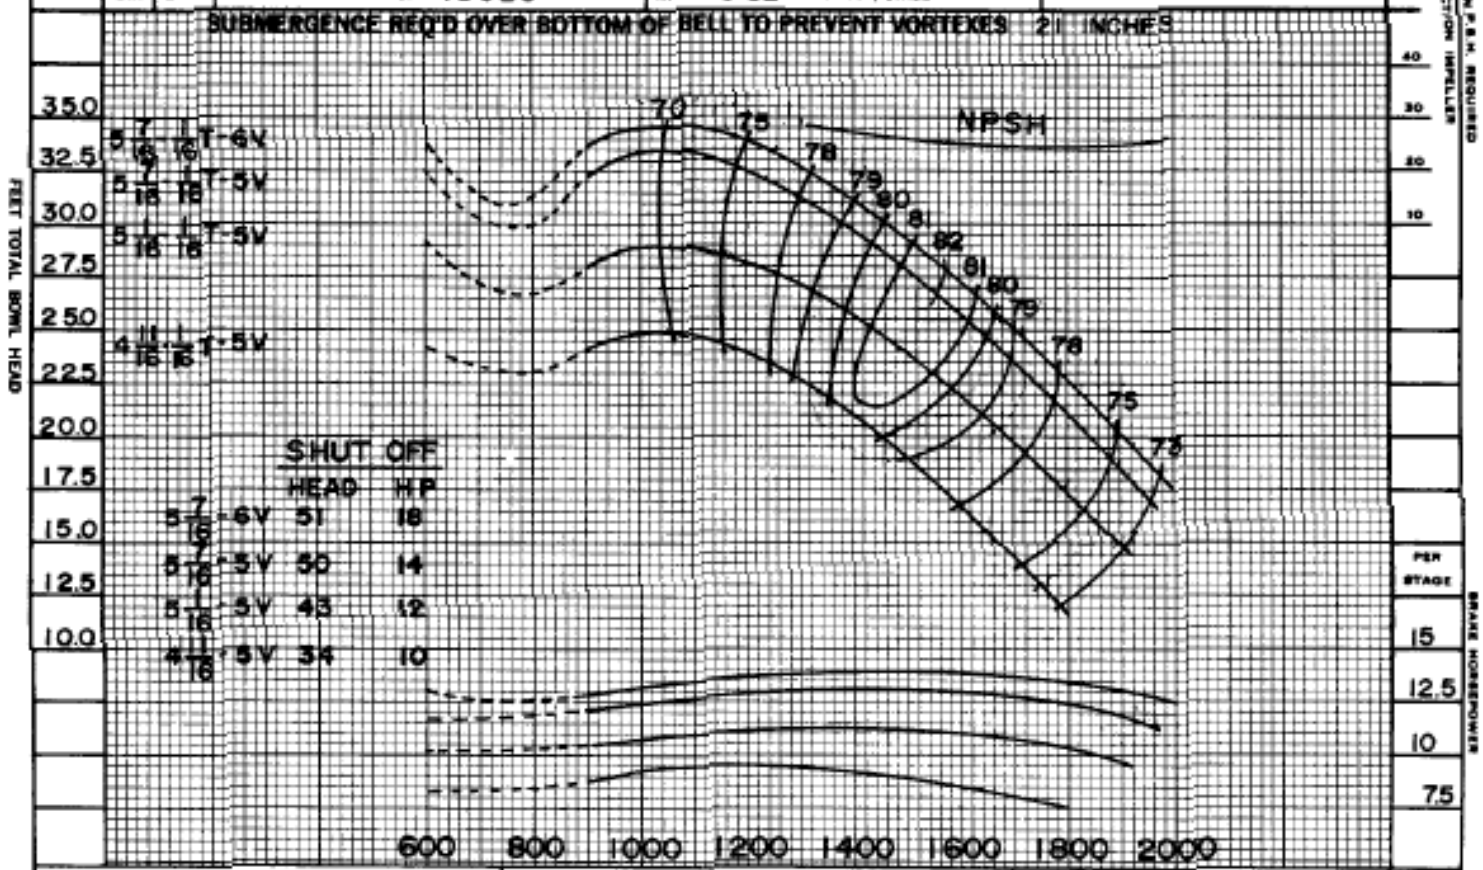

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

DATE 7-31-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1908

8 PS MIXED-FLOW PUMP

1760 R.P.M.

IMPELLER — BRONZE
BOWL — CAST IRON
CLASS 'C' FIN.

CURVE SHEET NO. EC-0829

JP-1017