PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 29690	THRUST CONSTANT 1219·0	PUMP SHAFT DIAM. 4"
			IMPELLER PATTERN NO. 23106	WR² 3700 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 175"

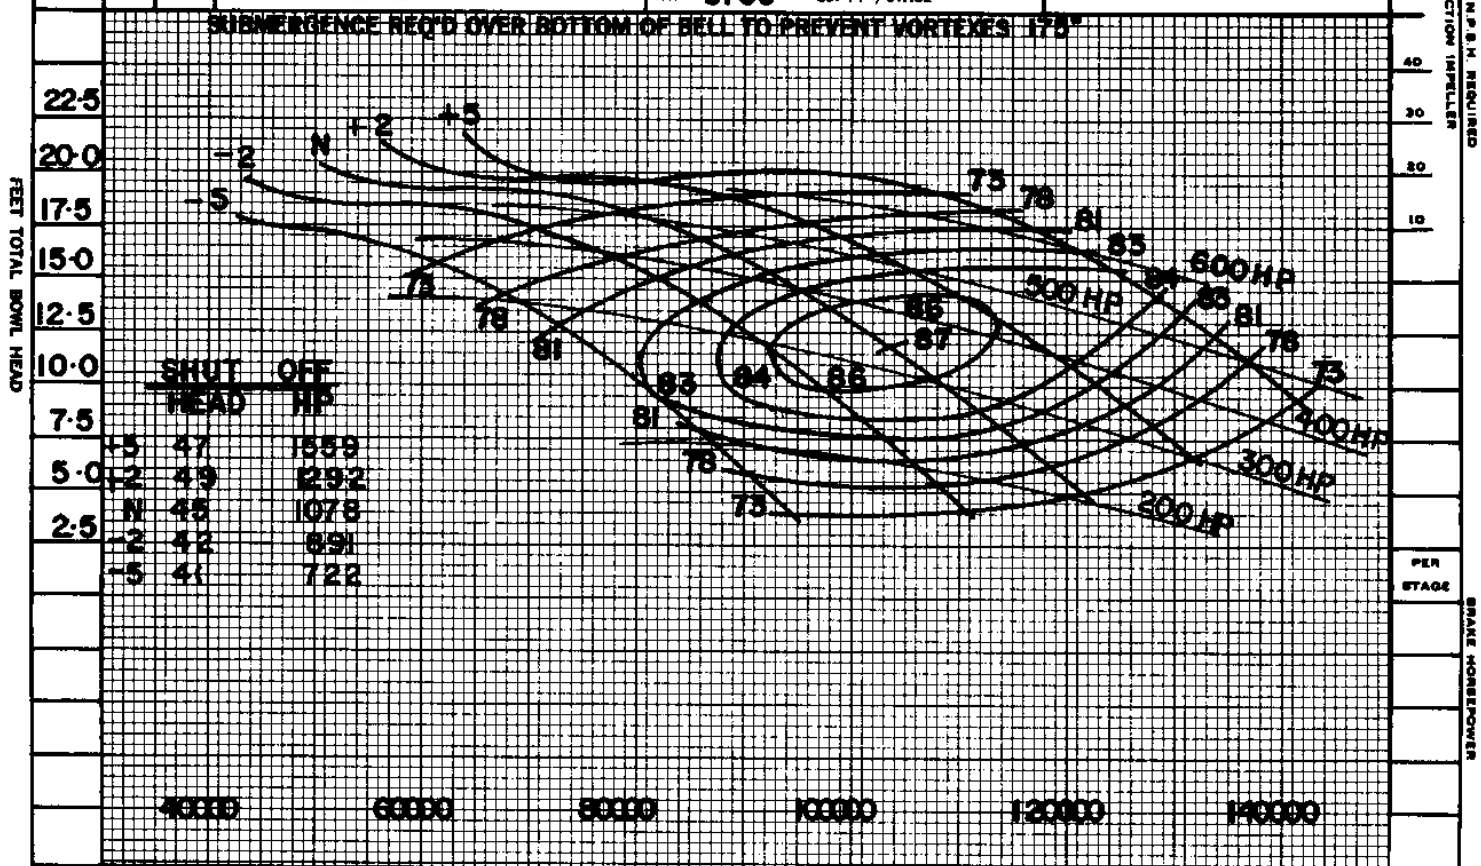

	SHUT OFF HEAD	HP
+5	47	1559
+2	49	1292
N	45	1078
-2	42	891
-5	41	722

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1·0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1·0

DATE 10-1-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

60 PO PROPELLER PUMP 270 RPM

IMPELLER — BRONZE BOWL — CAST IRON

CURVE SHEET NO EC-0872

IP-1017