PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 41924 IMPELLER PATTERN NO. 41667-6	THRUST CONSTANT WR² 635 LB. FT²/STAGE	PUMP SHAFT DIAM. 6 1/2" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 133"

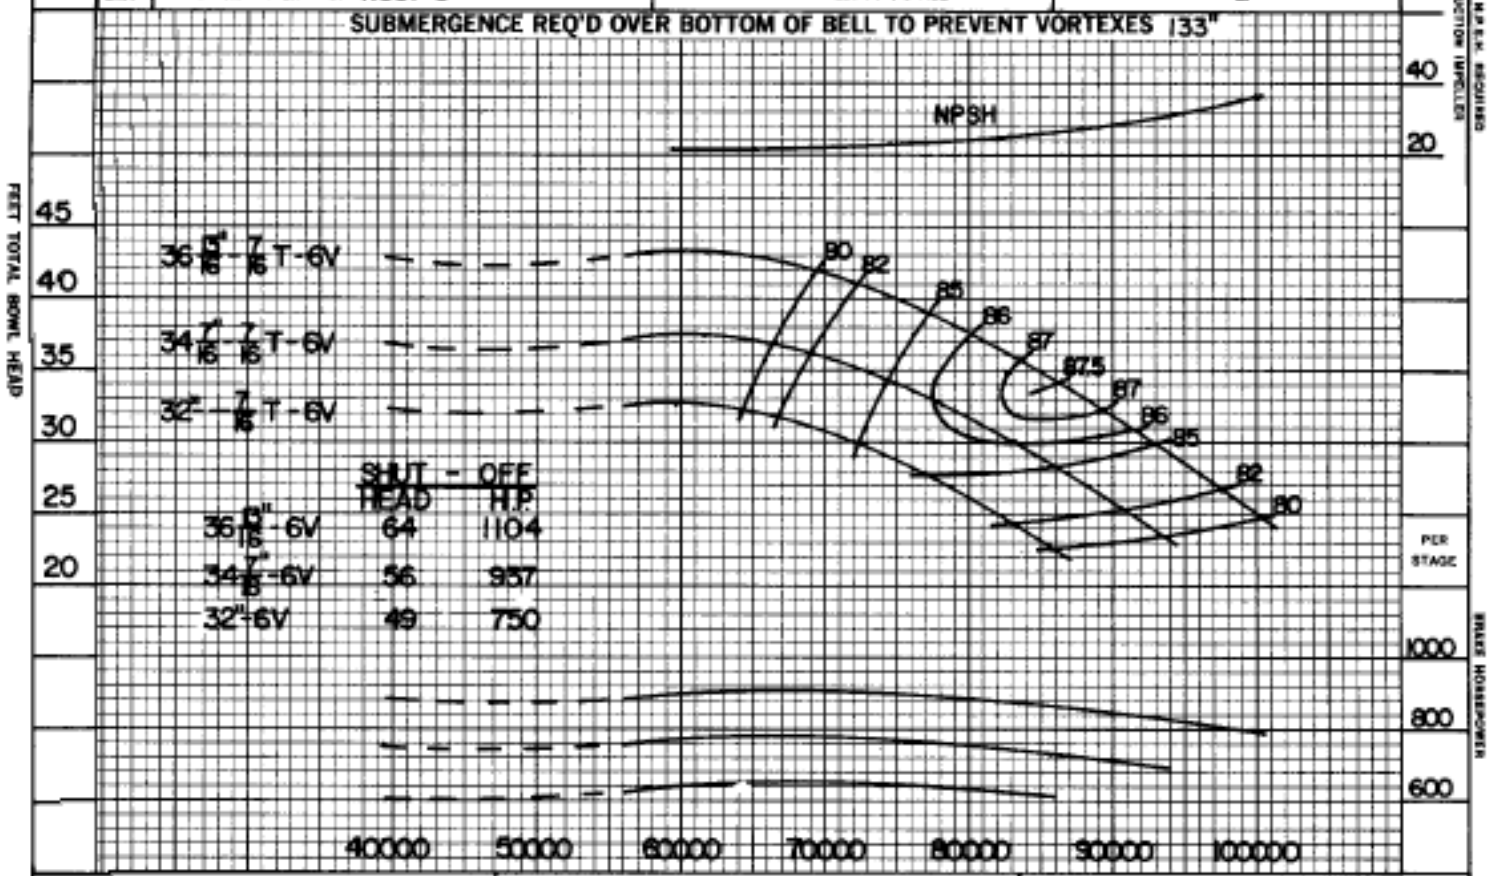

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00

DATE 4-30-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1906

54 PS MIXED-FLOW PUMP 295 RPM

IMPELLER – BRONZE BOWL – CAST IRON

CLASS 'C' FIN.

CURVE SHEET NO. EC-2226

FEET N.P.S.H. REQUIRED AT SUCTION IMPELLER

BRAKE HORSEPOWER

JP-341A