PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 29690	THRUST CONSTANT 1219.0	PUMP SHAFT DIAM. 4"
			IMPELLER PATTERN NO. 23106	WR² 3700 LB. FT²/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 175 INCHES

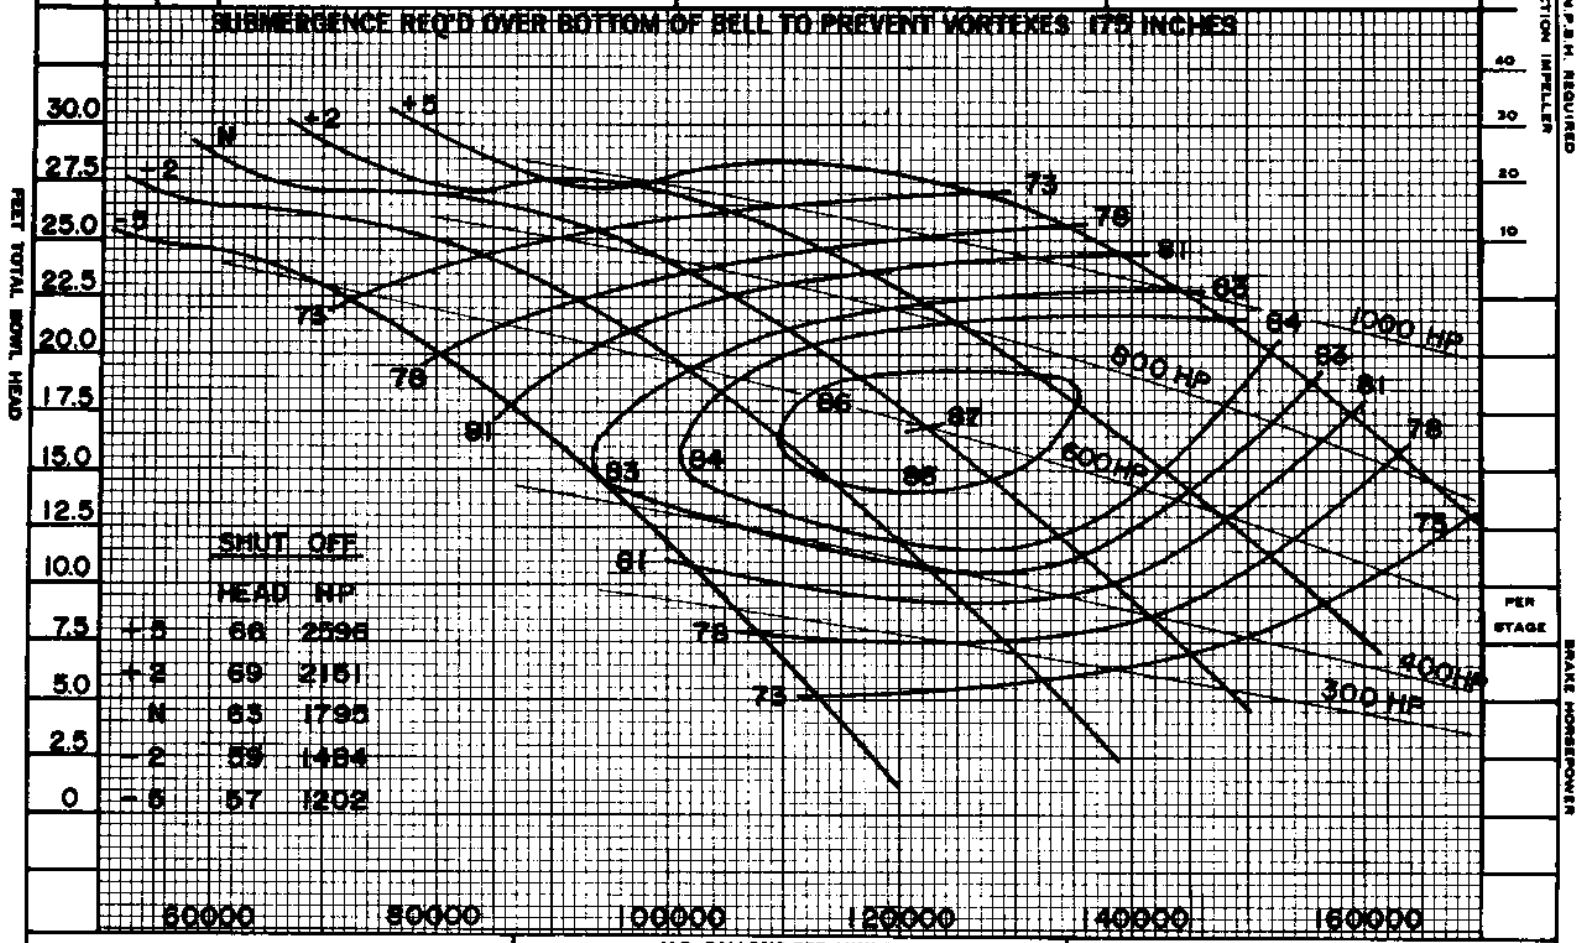

SHUT OFF

	HEAD	HP
+5	66	2596
+2	69	2151
N	63	1795
-2	59	1484
-5	57	1202

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.0

FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.0

DATE 5-21-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

60 PO PROPELLER PUMP 320 RPM

IMPELLER — BRONZE BOWL — CAST IRON

CURVE SHEET NO. EC-0787

JP-1017