PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 41924 IMPELLER PATTERN NO. 41667-6	THRUST CONSTANT 635 WR^2 LB. FT^2/STAGE	PUMP SHAFT DIAM. $6\frac{1}{2}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 133"

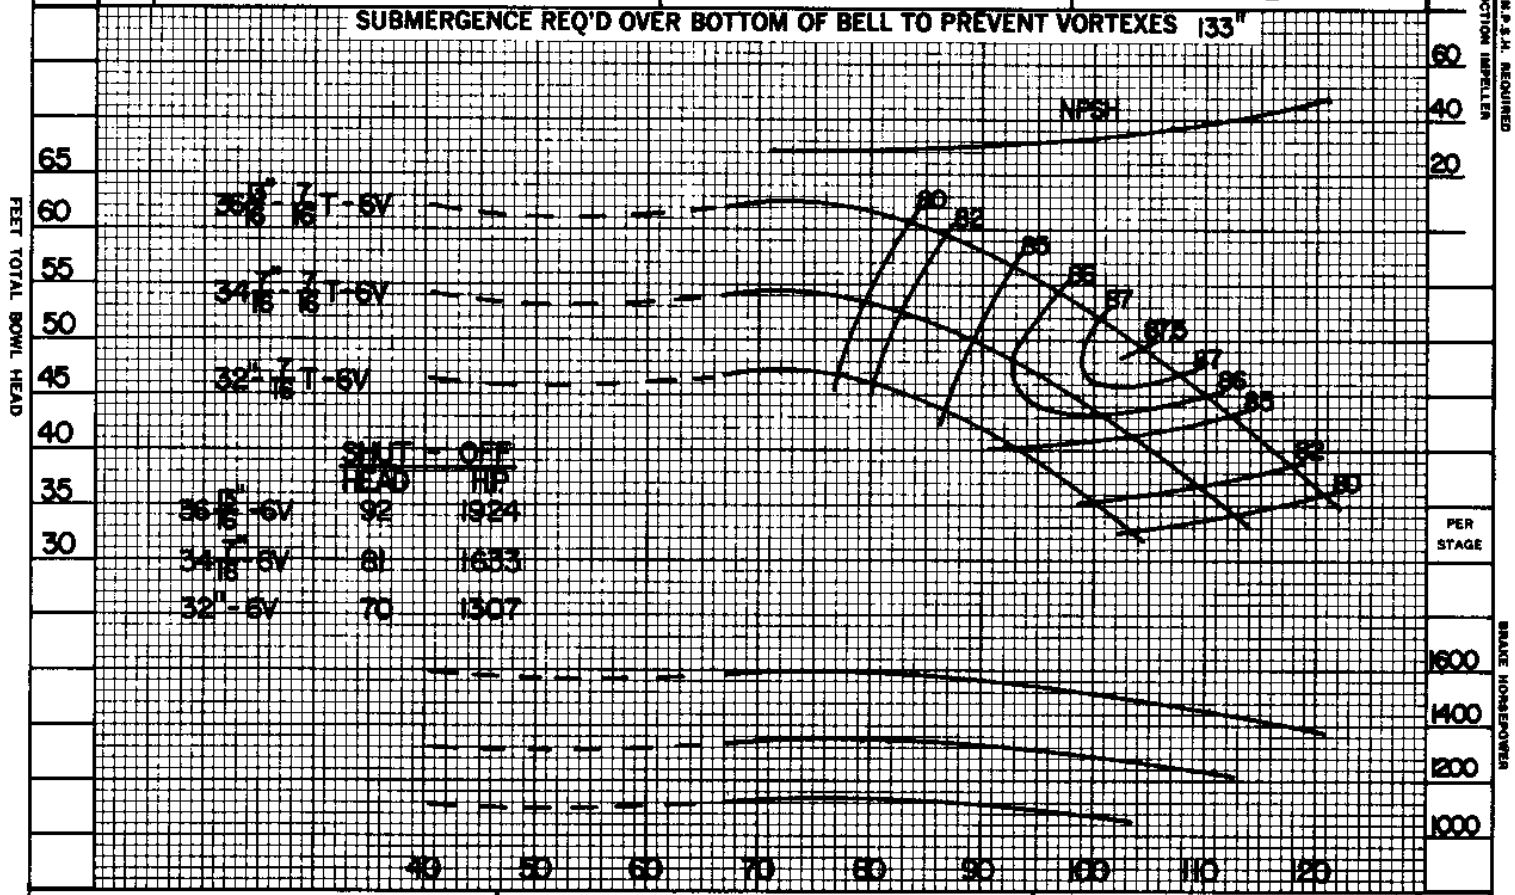

	SHUT-OFF HEAD	HP
36 9/16"-6V	92	1924
34 7/16"-6V	81	1633
32"-6V	70	1307

U.S. GALLONS PER MINUTE X1000

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY 1.00
FOR 2 STAGES MULTIPLY HD. & EFF. BY 1.00
DATE 4-30-77

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

54 PS MIXED-FLOW PUMP 355 RPM
IMPELLER – BRONZE BOWL – CAST IRON
CLASS 'C' FIN.
CURVE SHEET NO. EC-2228

JP 1124