PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 17796 IMPELLER PATTERN NO. 2924	THRUST CONSTANT 2.4 WR² .052 LB. FT²/STAGE	PUMP SHAFT DIAM. 3/4

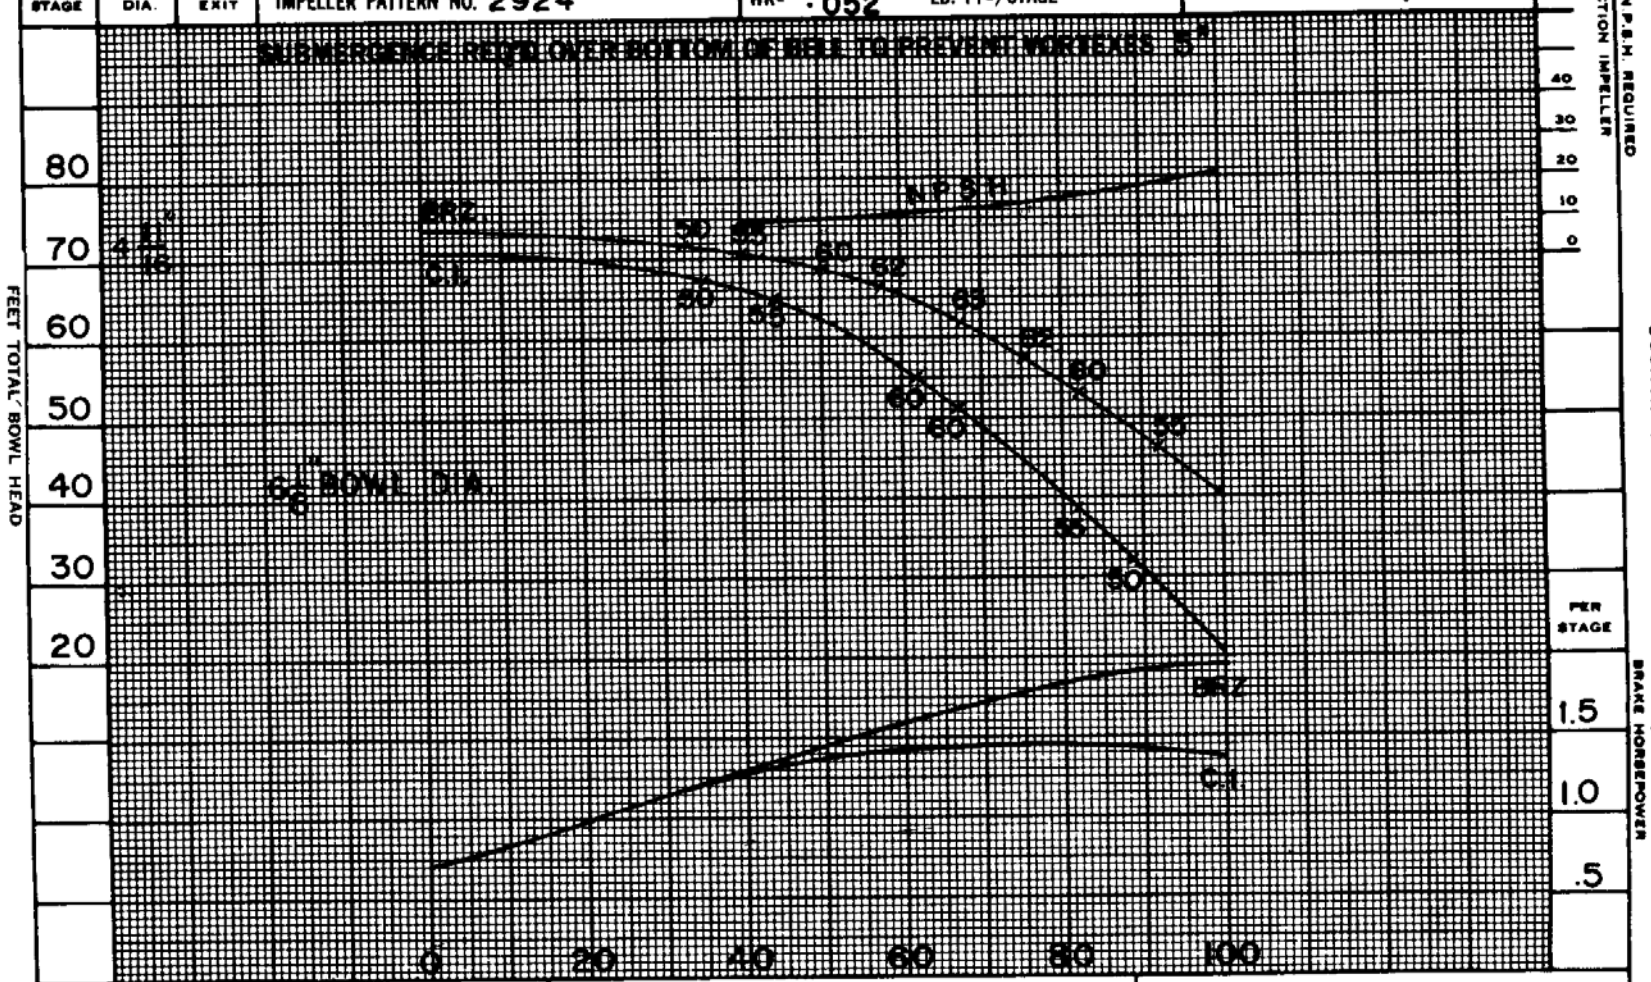

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 5 STAGES MULTIPLY HD. & EFF. BY .98

DATE 4-2-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

6 AXC TURBINE PUMP
IMPELLER — BRONZE

3500 R.P.M.
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO.
EC-0685

JP-341

N.P.S.H. CORRECTED 9-1-73 REV. 1

PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 17796 IMPELLER PATTERN NO. 2924	THRUST CONSTANT 2.4 WR² .052 LB. FT²/STAGE	PUMP SHAFT DIAM. 3/4" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 5"

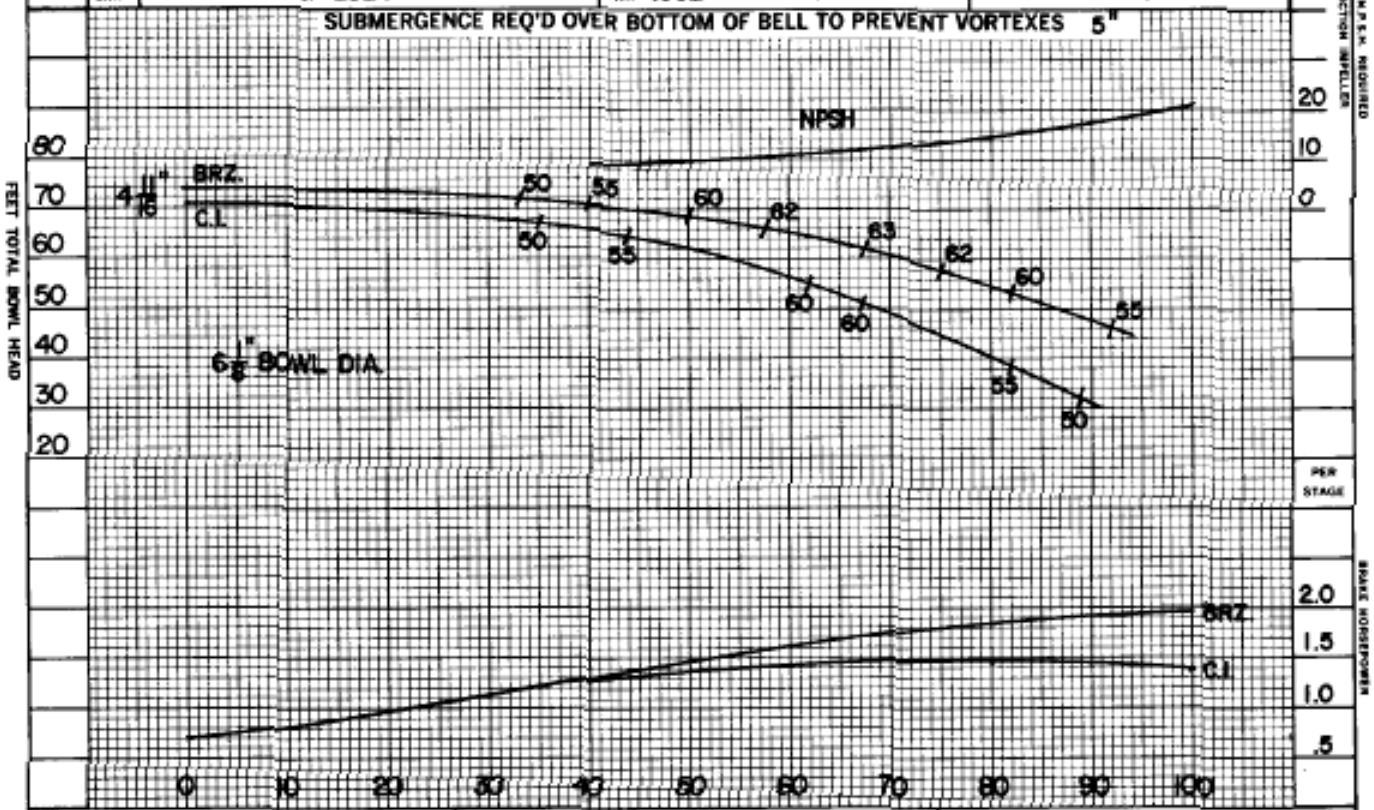

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 5 STAGES MULTIPLY HD. & EFF. BY .98

DATE 1-30-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

6 AXC TURBINE PUMP 3500 RPM

IMPELLER – BRONZE

BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2497

JP 1124