PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 1209	THRUST CONSTANT 3.2	PUMP SHAFT DIAM. 1
			IMPELLER PATTERN NO. 404	WR^2 .036 LB. FT^2/STAGE	

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 7"

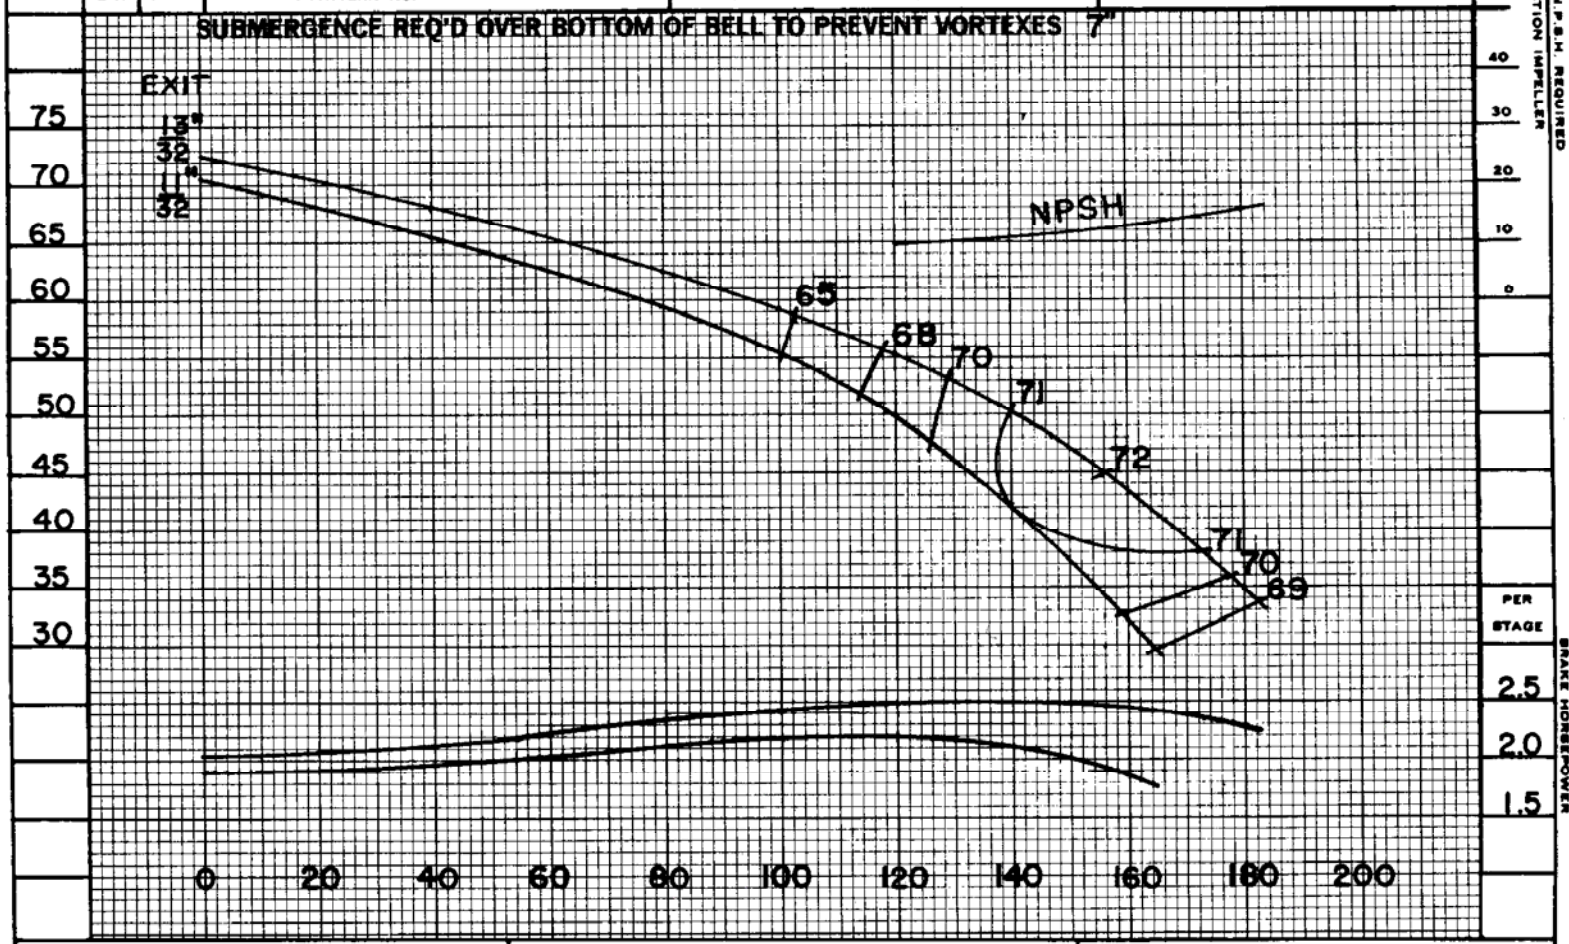

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 5 STAGES MULTIPLY HD. & EFF. BY .99
DATE 1-4-73

U.S. GALLONS PER MINUTE

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

6 BS TURBINE PUMP
IMPELLER — BRONZE
3500 R.P.M.
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO
EC 0646

JP-1017