PER STAGE	IMP. DIA.	IMP. EXIT	IMPELLER PART NO. 18142 IMPELLER PATTERN NO. 10931	THRUST CONSTANT 3·5 WR² 0·14 LB. FT²/STAGE	PUMP SHAFT DIAM. 1 3/16

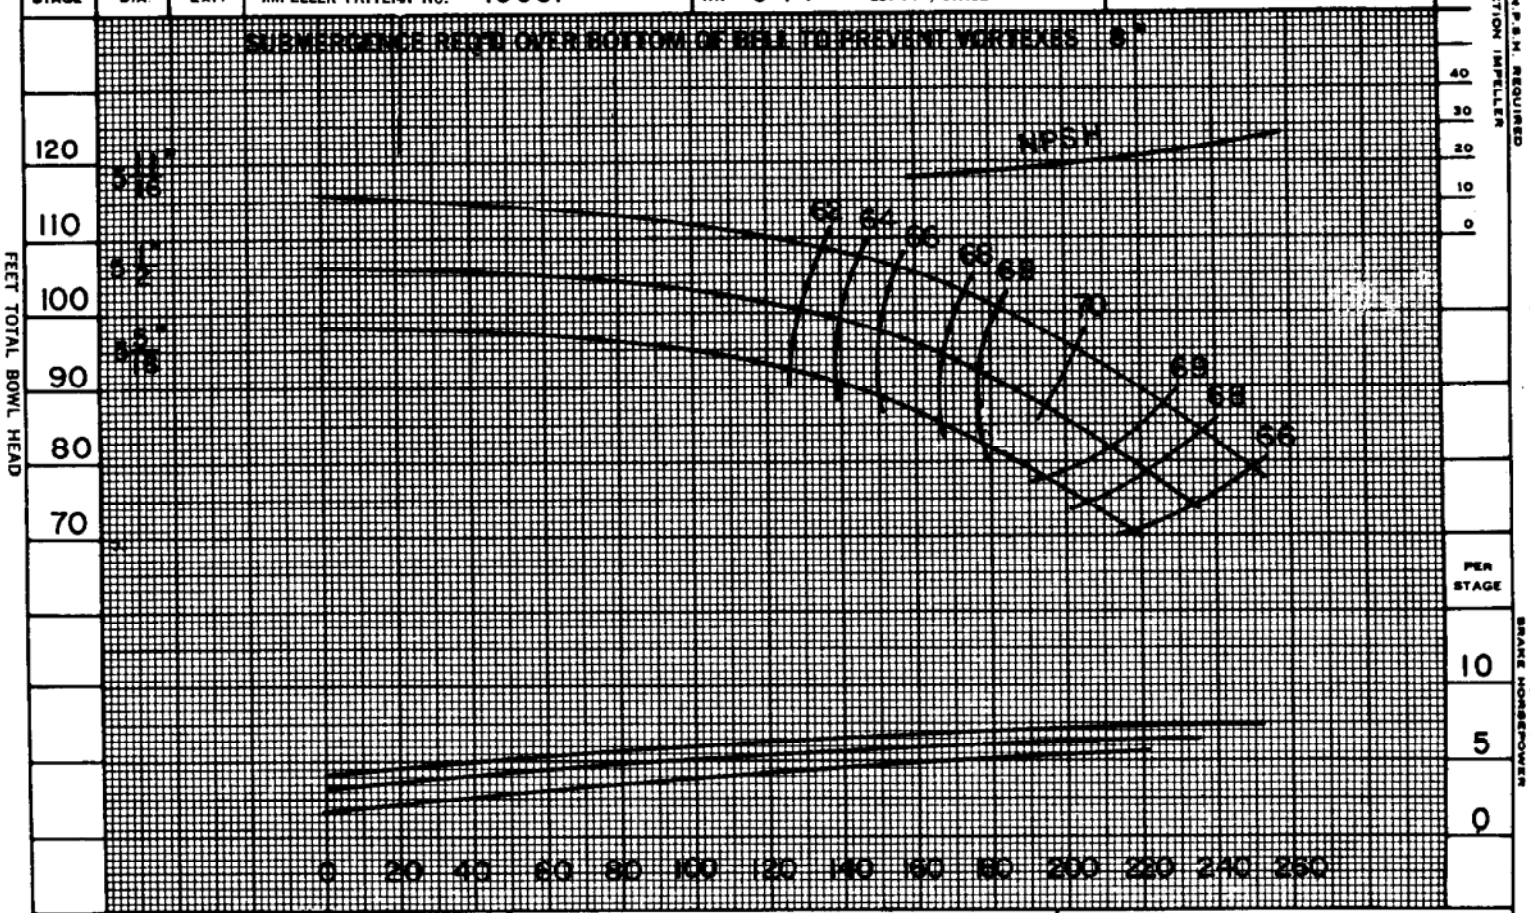

PERFORMANCE BASED ON MULTISTAGE TESTS
PUMPING CLEAR COLD WATER SP. GR. 1.0
FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95
FOR 2 STAGES MULTIPLY HD. & EFF. BY .98
DATE 3-30-73

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

7APC TURBINE PUMP
IMPELLER — BRONZE
3500 RPM
BOWL — CAST IRON
VIT. EN.
CURVE SHEET NO
EC-0692

JP-341

PER STAGE	IMP. DIAM. EXIT	IMPELLER PART NO. 18142 IMPELLER PATTERN NO. 10931	THRUST CONSTANT 3.5 WR^2 0.14 LB. FT²/STAGE	PUMP SHAFT DIAM. $1\frac{3}{16}$" INCHES

SUBMERGENCE REQ'D OVER BOTTOM OF BELL TO PREVENT VORTEXES 8"

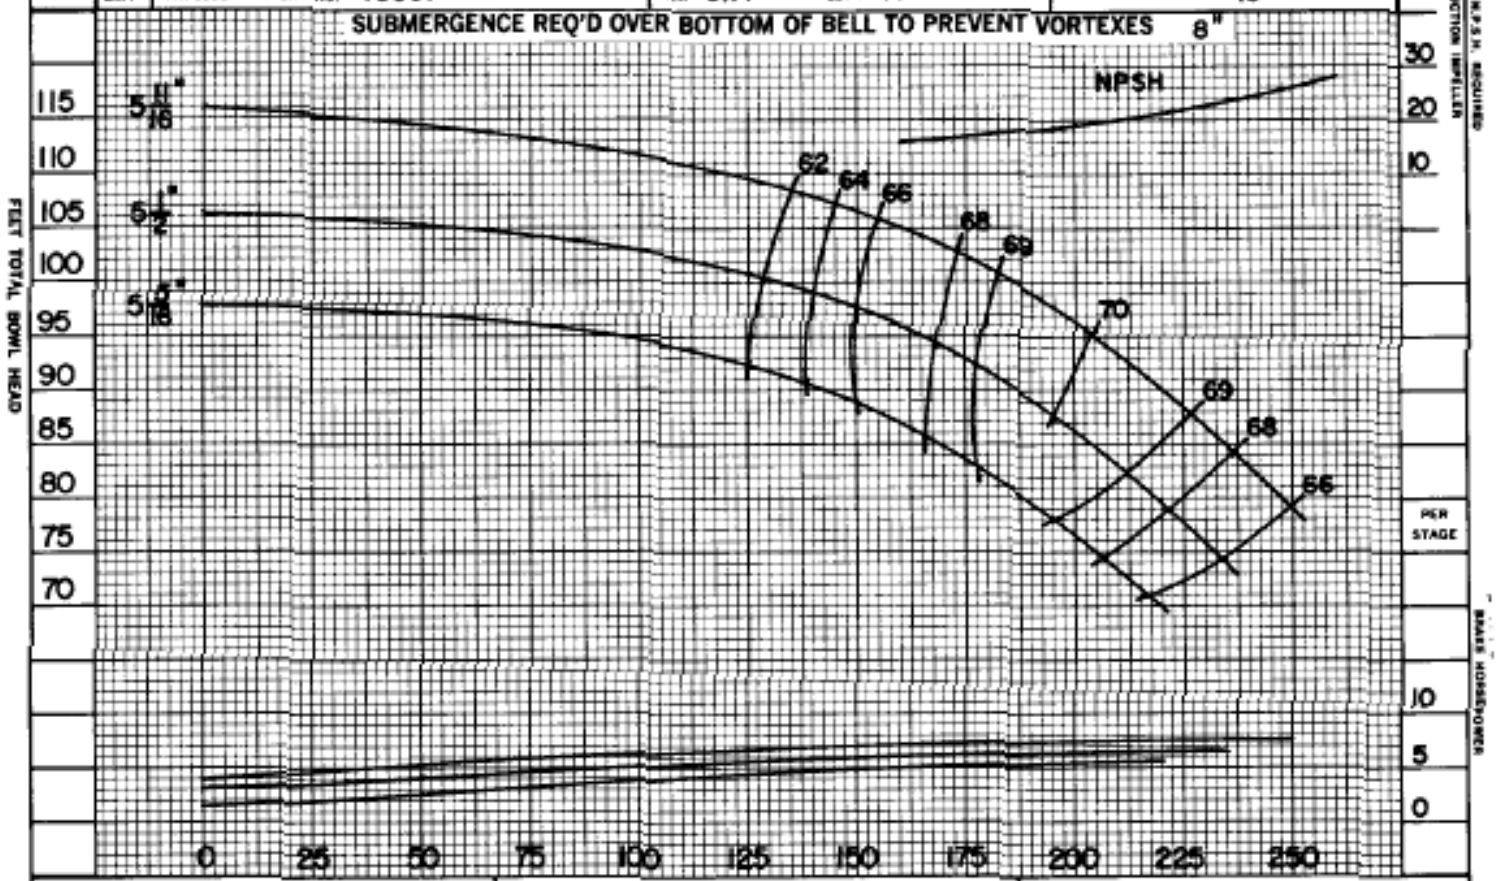

PERFORMANCE BASED ON MULTISTAGE TESTS PUMPING CLEAR COLD WATER SP. GR. 1.0

FOR 1 STAGE MULTIPLY HEAD & EFF. BY .95

FOR 2 STAGES MULTIPLY HD. & EFF. BY .98

DATE 1-27-78

Johnston Pump Company
Glendora, California 91740
ESTABLISHED 1909

7 APC TURBINE PUMP 3500 R.P.M.

IMPELLER – BRONZE

BOWL – CAST IRON VIT. ENAMELED

CURVE SHEET NO. EC-2493

JP 1134